

EPC2111 – Enhancement-Mode GaN Power Transistor Half-Bridge

V_{DS} , 30 V

$R_{DS(on)}$, 19 mΩ (Q1), 8 mΩ (Q2)

I_D , 16 A (Q1), 16 A (Q2)



Revised June 19, 2020

Gallium Nitride's exceptionally high electron mobility and low temperature coefficient allows very low $R_{DS(on)}$, while its lateral device structure and majority carrier diode provide exceptionally low Q_G and zero Q_{RR} . The end result is a device that can handle tasks where very high switching frequency, and low on-time are beneficial as well as those where on-state losses dominate.

Questions:
Ask a GaN
Expert



Die size: 3.5 x 1.5 mm

EPC2111 eGaN® ICs are supplied only in passivated die form with solder bumps.

Applications

- High frequency DC-DC
- Point-of-load (POL) converters

Benefits

- High frequency operation (up to 10 MHz)
- Low inductance package
- High density footprint

Maximum Ratings			
DEVICE	PARAMETER		UNIT
Q1	V_{DS}	Drain-to-Source Voltage (Continuous)	30
		Drain-to-Source Voltage (up to 10,000 5 ms pulses at 150°C)	36
	I_D	Continuous ($T_A = 25^\circ\text{C}$, $R_{\theta JA} = 15^\circ\text{C/W}$)	16
		Pulsed (25°C , $T_{PULSE} = 300 \mu\text{s}$)	50
	V_{GS}	Gate-to-Source Voltage	6
		Gate-to-Source Voltage	-4
	T_J	Operating Temperature	-40 to 150
Q2	V_{DS}	Drain-to-Source Voltage (Continuous)	30
		Drain-to-Source Voltage (up to 10,000 5 ms pulses at 150°C)	36
	I_D	Continuous ($T_A = 25^\circ\text{C}$, $R_{\theta JA} = 36^\circ\text{C/W}$)	16
		Pulsed (25°C , $T_{PULSE} = 300 \mu\text{s}$)	140
	V_{GS}	Gate-to-Source Voltage	6
		Gate-to-Source Voltage	-4
	T_J	Operating Temperature	-40 to 150
Q1, Q2	T_{STG}	Storage Temperature	-40 to 150

Thermal Characteristics			
PARAMETER		TYP	UNIT
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	1.3	$^\circ\text{C/W}$
$R_{\theta JB}$	Thermal Resistance, Junction-to-Board	6.6	
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient (Note 1)	58	

Note 1: $R_{\theta JA}$ is determined with the device mounted on one square inch of copper pad, single layer 2 oz copper on FR4 board. See https://epc-co.com/epc/documents/product-training/Appnote_Thermal_Performance_of_eGaN_FETs.pdf for details

Scan QR code or click link below for more information including reliability reports, device models, demo boards!



<https://l.ead.me/EPC2111>

Static Characteristics

DEVICE	PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
Q1	BV_{DSS}	Drain-to-Source Voltage	$V_{GS} = 0\text{ V}, I_D = 0.25\text{ mA}$	30			V
	I_{DSS}	Drain-Source Leakage	$V_{GS} = 0\text{ V}, V_{DS} = 24\text{ V}$		0.002	0.15	mA
	I_{GSS}	Gate-to-Source Forward Leakage	$V_{GS} = 5\text{ V}$		0.004	2	mA
		Gate-to-Source Reverse Leakage	$V_{GS} = -4\text{ V}$		0.002	0.15	mA
	$V_{GS(TH)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 2\text{ mA}$	0.8	1.4	2.5	V
	$R_{DS(on)}$	Drain-Source On Resistance	$V_{GS} = 5\text{ V}, I_D = 15\text{ A}$		14	19	mΩ
	V_{SD}	Source-Drain Forward Voltage	$V_{GS} = 0\text{ V}, I_S = 0.5\text{ A}$		1.8		V
Q2	BV_{DSS}	Drain-to-Source Voltage	$V_{GS} = 0\text{ V}, I_D = 0.4\text{ mA}$	30			V
	I_{DSS}	Drain-Source Leakage	$V_{GS} = 0\text{ V}, V_{DS} = 24\text{ V}$		0.005	0.3	mA
	I_{GSS}	Gate-to-Source Forward Leakage	$V_{GS} = 5\text{ V}$		0.01	4.5	mA
		Gate-to-Source Reverse Leakage	$V_{GS} = -4\text{ V}$		0.005	0.3	mA
	$V_{GS(TH)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 5\text{ mA}$	0.8	1.4	2.5	V
	$R_{DS(on)}$	Drain-Source On Resistance	$V_{GS} = 5\text{ V}, I_D = 15\text{ A}$		6	8	mΩ
	V_{SD}	Source-Drain Forward Voltage	$V_{GS} = 0\text{ V}, I_S = 0.5\text{ A}$		1.8		V

Dynamic Characteristics

DEVICE	PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
Q1	C_{ISS}	Input Capacitance	$V_{GS} = 0\text{ V}, V_{DS} = 15\text{ V}$		190	230	pF
	C_{RSS}	Reverse Transfer Capacitance			8		
	C_{OSS}	Output Capacitance			170	255	
	$C_{OSS(ER)}$	Effective Output Capacitance, Energy Related (Note 2)	$V_{GS} = 0\text{ V}, V_{DS} = 0\text{ to }15\text{ V}$		204		
	$C_{OSS(TR)}$	Effective Output Capacitance, Time Related (Note 3)			217		
	R_G	Gate Resistance			0.5		
	Q_G	Total Gate Charge	$V_{GS} = 5\text{ V}, V_{DS} = 15\text{ V}, I_D = 15\text{ A}$		1.7	2.2	nC
	Q_{GS}	Gate-to-Source Charge	$V_{DS} = 15\text{ V}, I_D = 15\text{ A}$		0.6		
	Q_{GD}	Gate-to-Drain Charge			0.3		
	$Q_{G(TH)}$	Gate Charge at Threshold			0.4		
	Q_{OSS}	Output Charge	$V_{GS} = 0\text{ V}, V_{DS} = 15\text{ V}$		3.3	5	
	Q_{RR}	Source-Drain Recovery Charge			0		
Q2	C_{ISS}	Input Capacitance	$V_{GS} = 0\text{ V}, V_{DS} = 15\text{ V}$		495	595	pF
	C_{RSS}	Reverse Transfer Capacitance			21		
	C_{OSS}	Output Capacitance			490	735	
	$C_{OSS(ER)}$	Effective Output Capacitance, Energy Related (Note 2)	$V_{GS} = 0\text{ V}, V_{DS} = 0\text{ to }15\text{ V}$		590		
	$C_{OSS(TR)}$	Effective Output Capacitance, Time Related (Note 3)			637		
	R_G	Gate Resistance			0.4		
	Q_G	Total Gate Charge	$V_{GS} = 5\text{ V}, V_{DS} = 15\text{ V}, I_D = 15\text{ A}$		4.5	5.8	nC
	Q_{GS}	Gate-to-Source Charge	$V_{DS} = 15\text{ V}, I_D = 15\text{ A}$		1.4		
	Q_{GD}	Gate-to-Drain Charge			0.8		
	$Q_{G(TH)}$	Gate Charge at Threshold			1		
	Q_{OSS}	Output Charge	$V_{GS} = 0\text{ V}, V_{DS} = 15\text{ V}$		9.6	15	
	Q_{RR}	Source-Drain Recovery Charge			0		

Note 2: $C_{OSS(ER)}$ is a fixed capacitance that gives the same stored energy as C_{OSS} while V_{DS} is rising from 0 to 50% BV_{DSS} .

Note 3: $C_{OSS(TR)}$ is a fixed capacitance that gives the same charging time as C_{OSS} while V_{DS} is rising from 0 to 50% BV_{DSS} .

Figure 1a (Q1): Typical Output Characteristics at 25°C

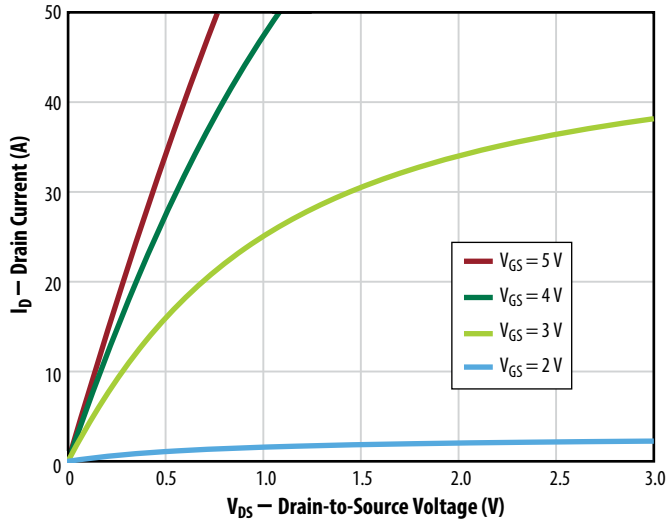


Figure 1b (Q2): Typical Output Characteristics at 25°C

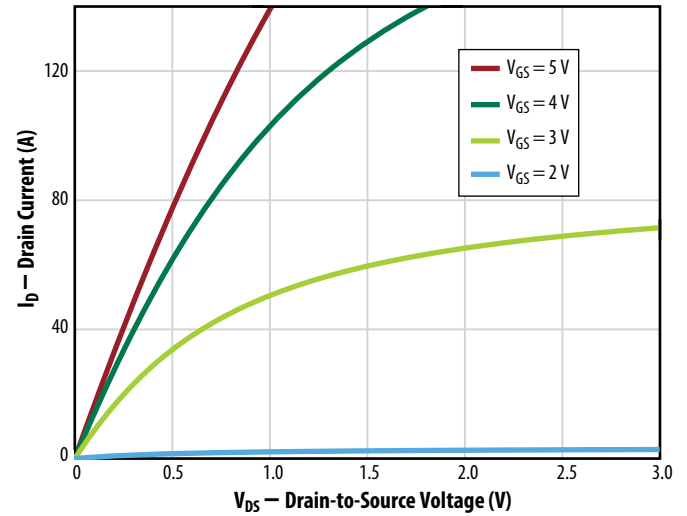


Figure 2a (Q1): Typical Transfer Characteristics

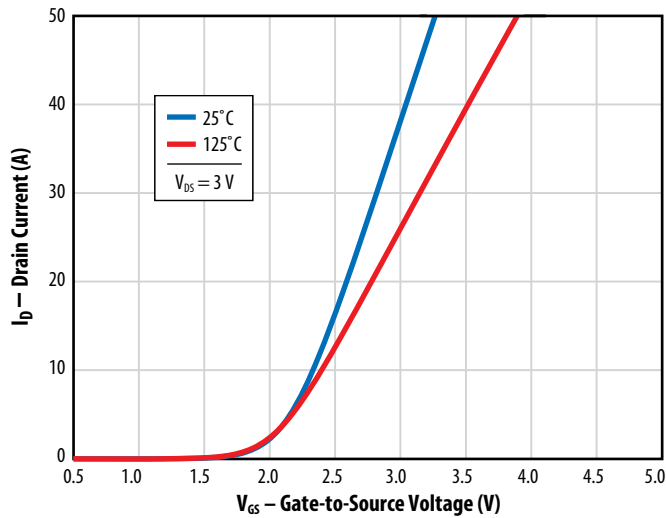


Figure 2b (Q2): Typical Transfer Characteristics

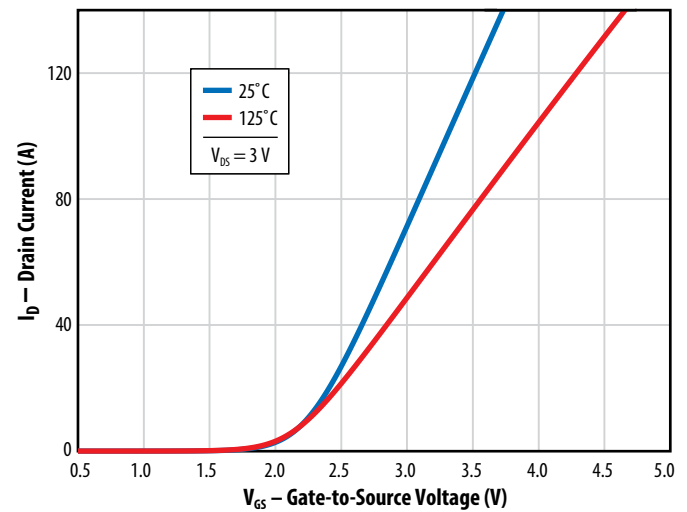
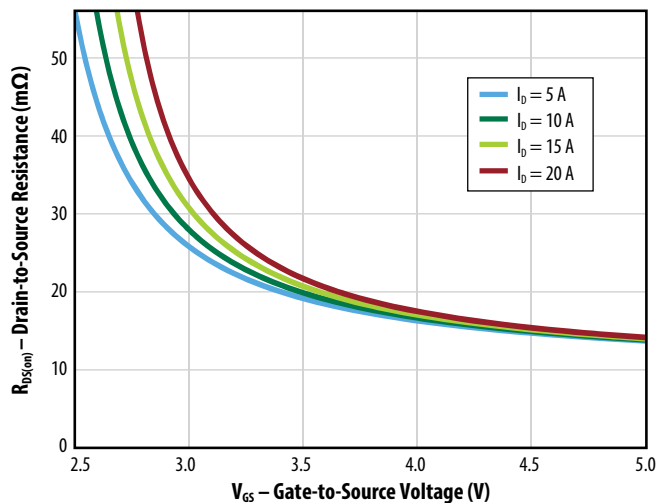
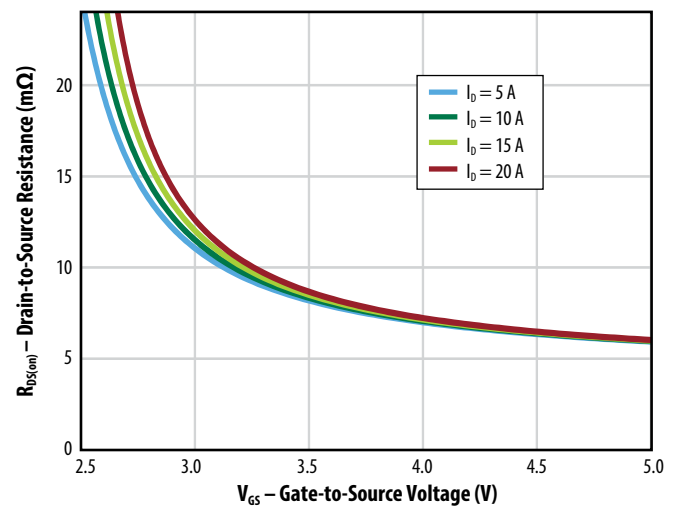
Figure 3a (Q1): Typical $R_{DS(on)}$ vs. V_{GS} for Various Drain CurrentsFigure 3b (Q2): Typical $R_{DS(on)}$ vs. V_{GS} for Various Drain Currents

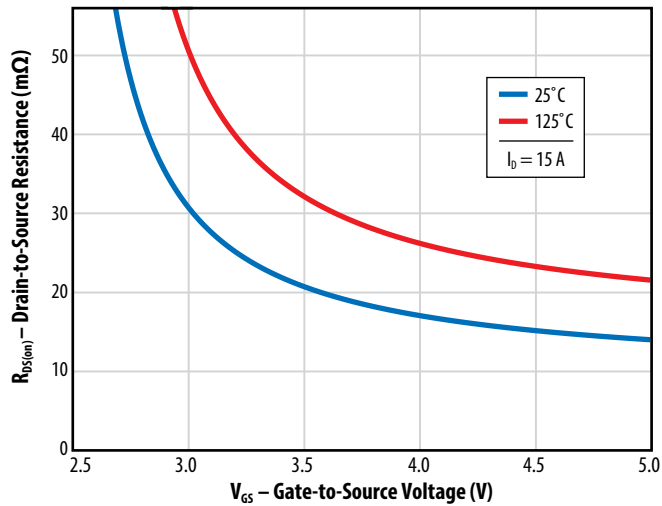
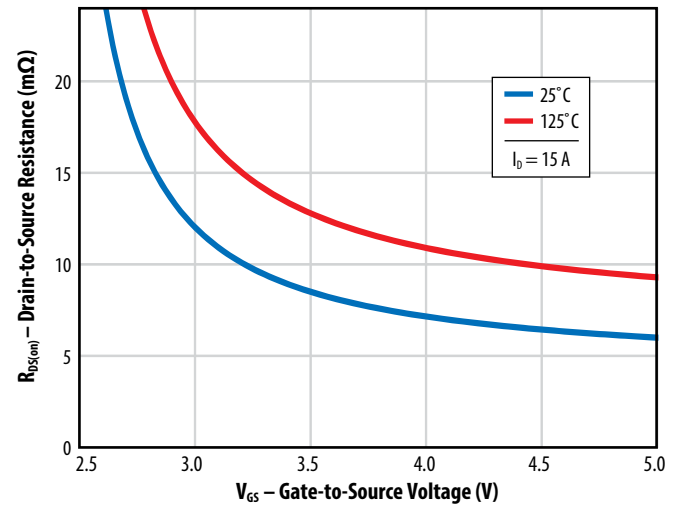
Figure 4a (Q1): Typical $R_{DS(on)}$ vs. V_{GS} for Various TemperaturesFigure 4b (Q2): Typical $R_{DS(on)}$ vs. V_{GS} for Various Temperatures

Figure 5a (Q1): Typical Capacitance (Linear Scale)

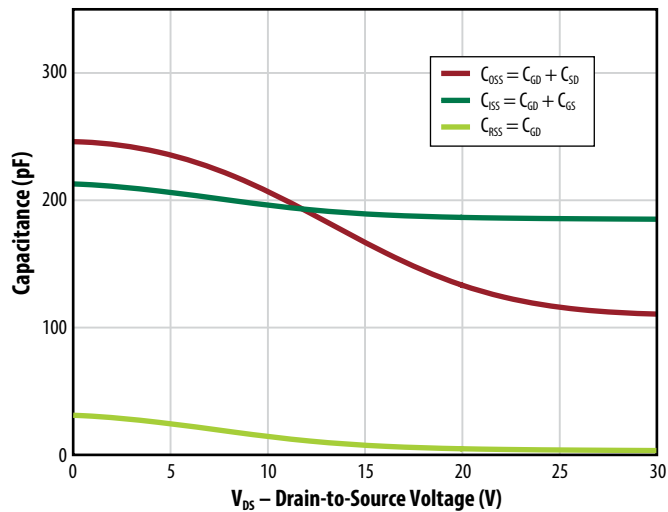


Figure 5b (Q2): Typical Capacitance (Linear Scale)

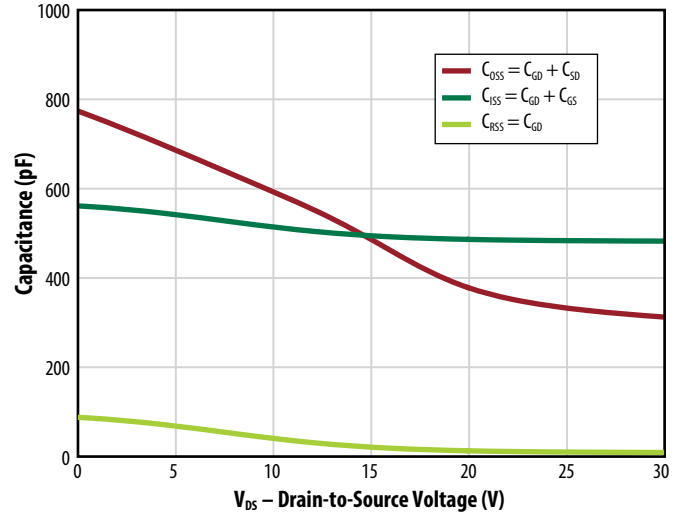
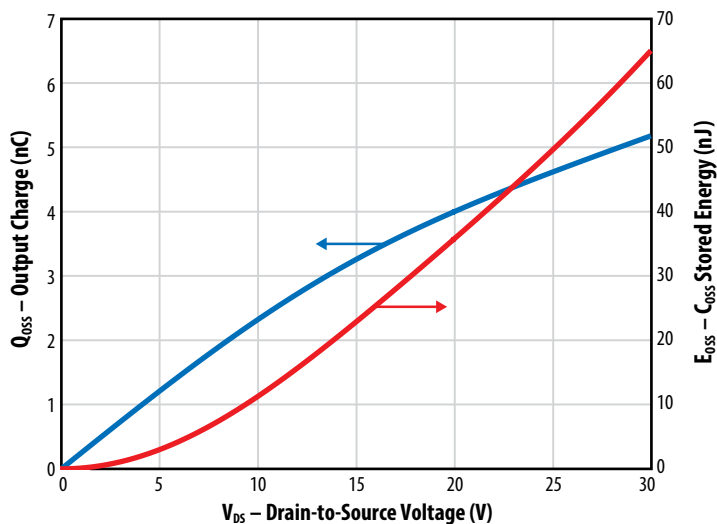
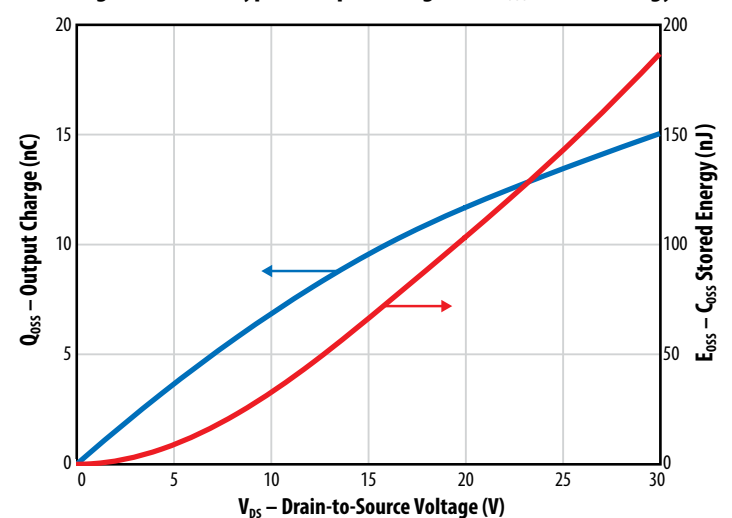
Figure 6a (Q1): Typical Output Charge and C_{oss} Stored EnergyFigure 6b (Q2): Typical Output Charge and C_{oss} Stored Energy

Figure 7a (Q1): Typical Gate Charge

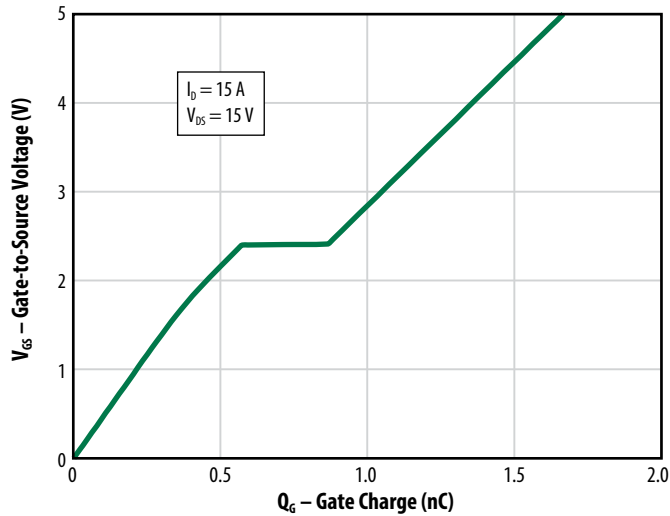


Figure 7b (Q2): Typical Gate Charge

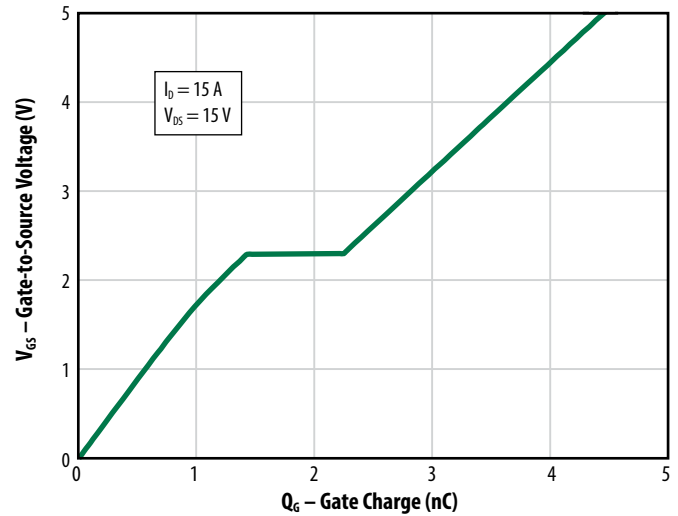
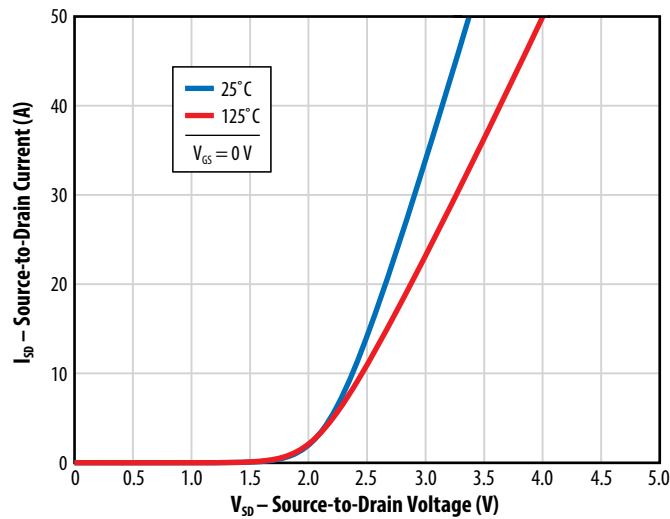
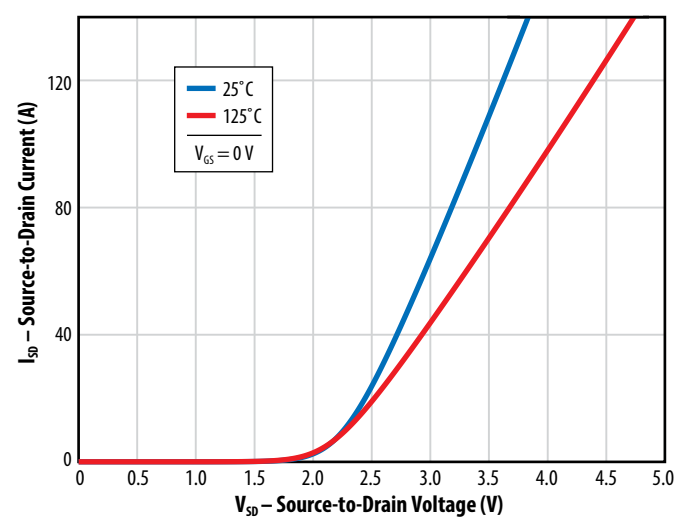


Figure 8a (Q1): Typical Reverse Drain-Source Characteristics



Note: Negative gate drive voltage increases the reverse drain-source voltage.
EPC recommends 0 V for OFF.

Figure 8b (Q2): Typical Reverse Drain-Source Characteristics



Note: Negative gate drive voltage increases the reverse drain-source voltage.
EPC recommends 0 V for OFF.

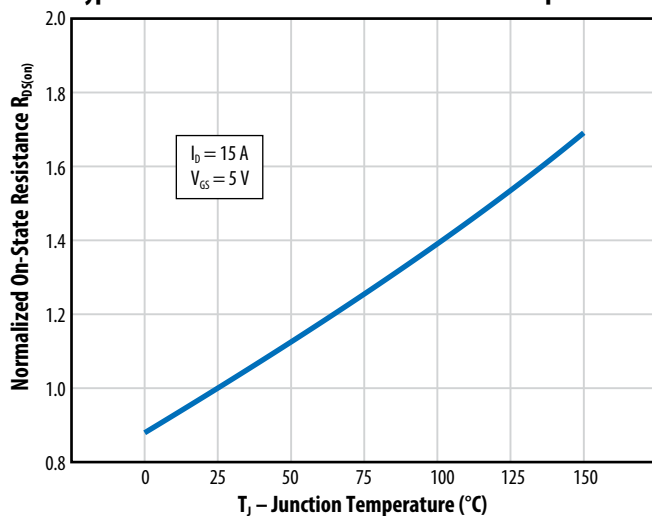
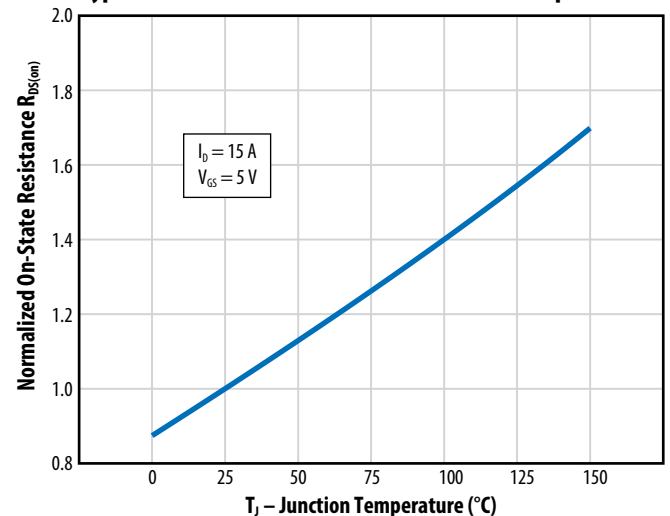
Figure 9a (Q1):
Typical Normalized On-State Resistance vs. TemperatureFigure 9b (Q2):
Typical Normalized On-State Resistance vs. Temperature

Figure 10a (Q1):
Typical Normalized Threshold Voltage vs. Temperature

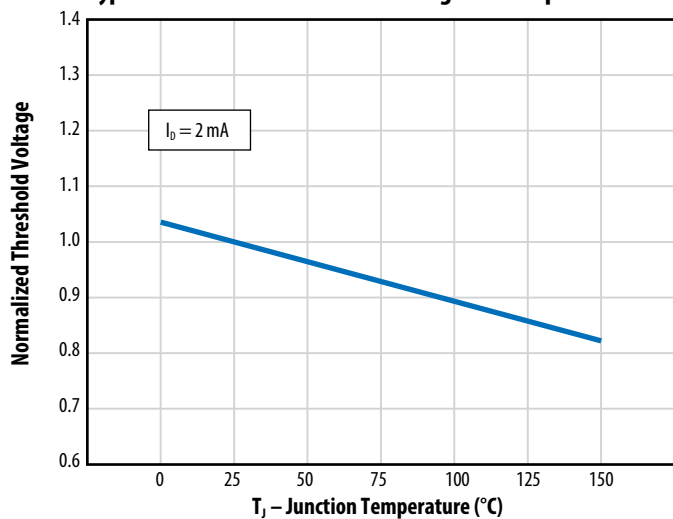


Figure 10b (Q2):
Typical Normalized Threshold Voltage vs. Temperature

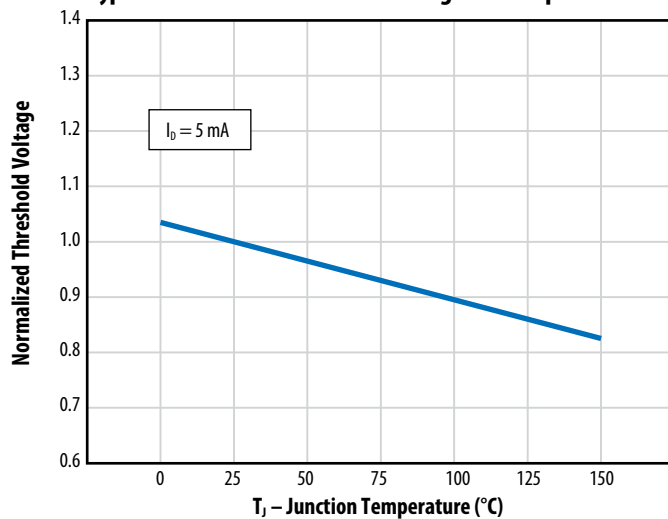


Figure 11a (Q1): Safe Operating Area

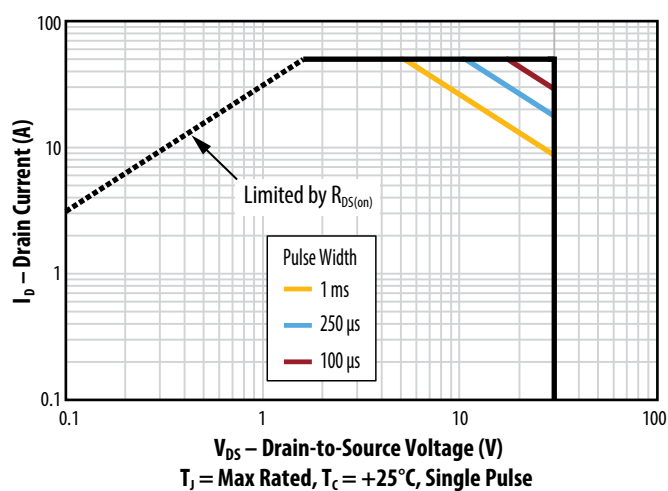


Figure 11b (Q2): Safe Operating Area

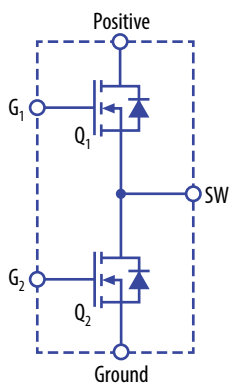
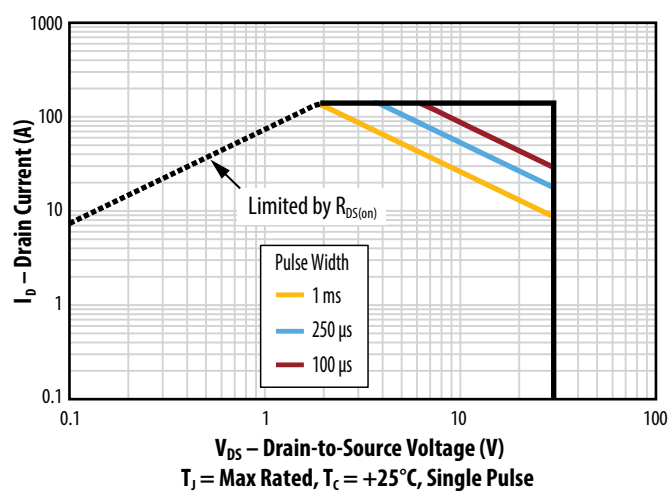


Figure 12
Typical Application Circuit

Figure 13a
Typical Transient
Thermal Response
Curves

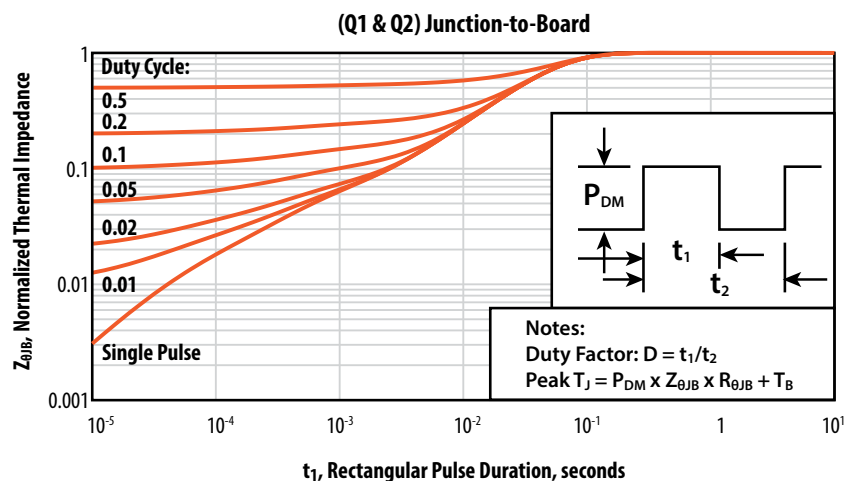
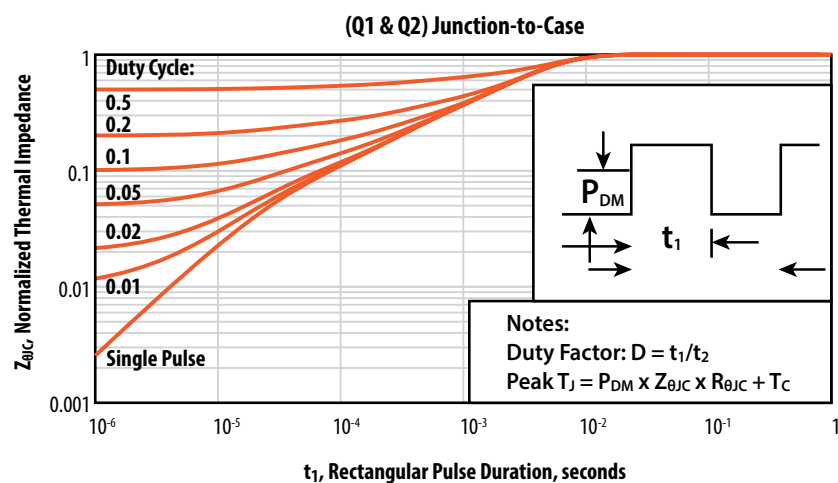


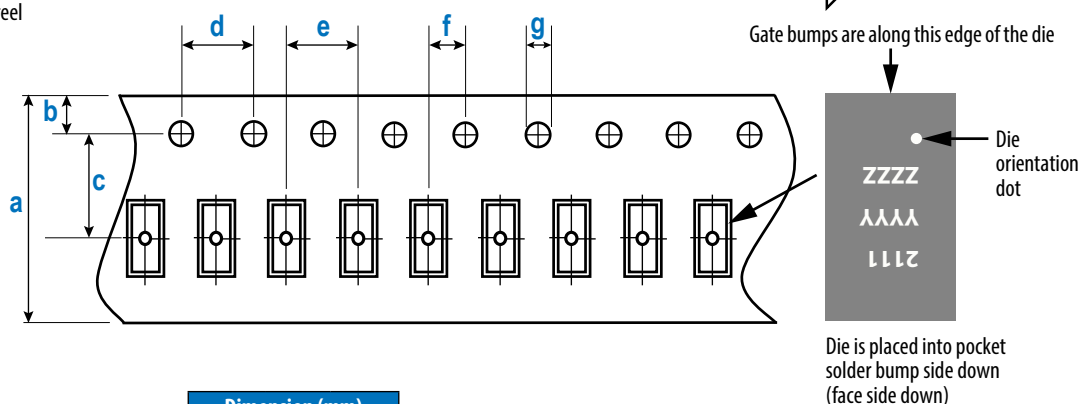

Figure 13b
Typical Transient
Thermal Response
Curves



TAPE AND REEL CONFIGURATION

4mm pitch, 12mm wide tape on 7" reel

7" reel

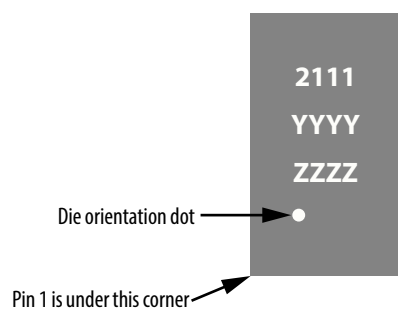


EPC2111 (Note 1)	Dimension (mm)		
	Target	MIN	MAX
a	12.00	11.90	12.30
b	1.75	1.65	1.85
c (Note 2)	5.50	5.45	5.55
d	4.00	3.90	4.10
e	4.00	3.90	4.10
f (Note 2)	2.00	1.95	2.05
g	1.50	1.50	1.60

Note 1: MSL 1 (moisture sensitivity level 1) classified according to IPC/JEDEC industry standard.

Note 2: Pocket position is relative to the sprocket hole measured as true position of the pocket, not the pocket hole.

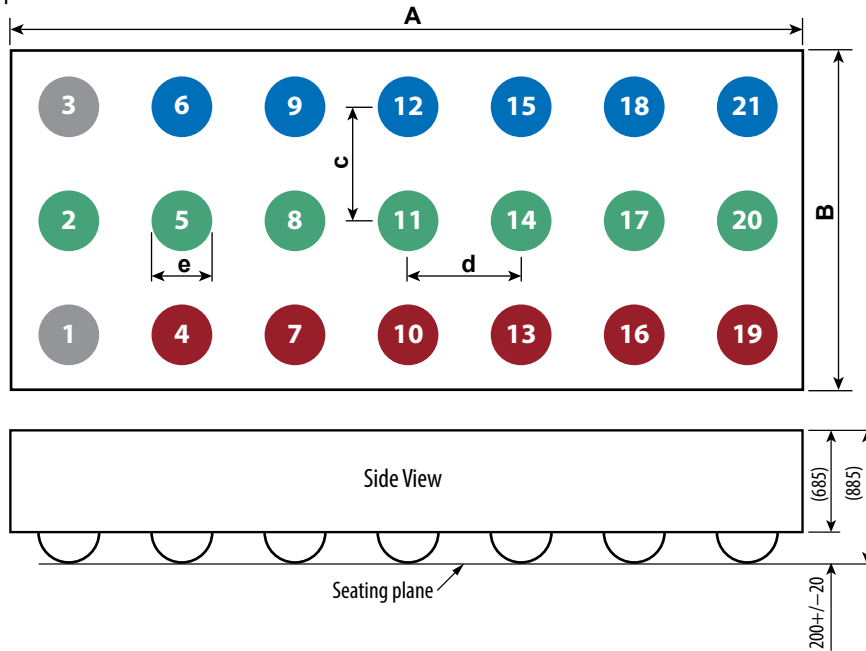
DIE MARKINGS



Part Number	Laser Markings		
	Part # Marking Line 1	Lot_Date Code Marking Line 2	Lot_Date Code Marking Line 3
EPC2111	2111	YYYY	ZZZZ

DIE OUTLINE

Solder Bump View



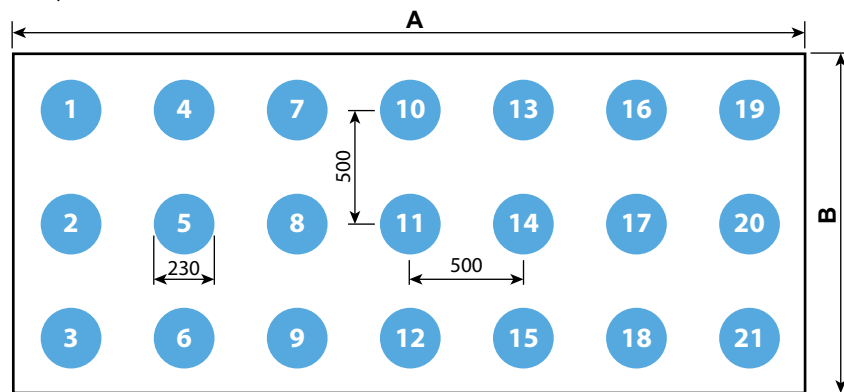
DIM	MIN	Nominal	MAX
A	3470	3500	3530
B	1470	1500	1530
C	500	500	500
D	500	500	500
E	238	264	290

Pad 1 is G1; Pad 3 is G2;

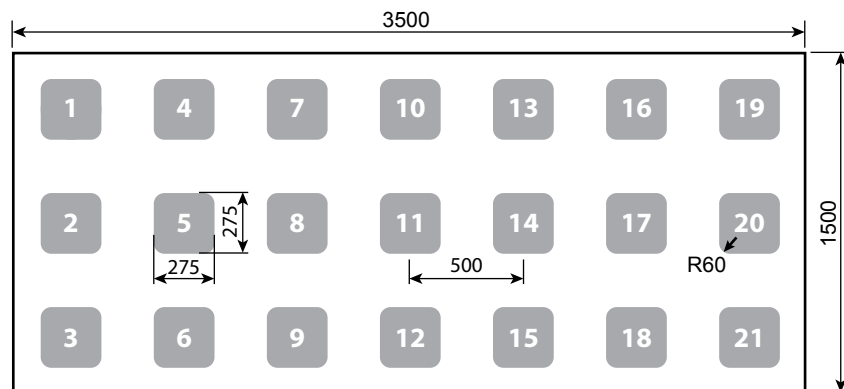
Pads 4, 7, 10, 13, 16, 19 are V_{IN} ;

Pads 2, 5, 8, 11, 14, 17, 20 are SN;

Pads 6, 9, 12, 15, 18, 21 are GND

RECOMMENDED LAND PATTERN(measurements in μm)

The land pattern is solder mask defined.

RECOMMENDED STENCIL DRAWING(measurements in μm)

Recommended stencil should be 4 mil (100 μm) thick, must be laser cut, openings per drawing. The corner has a radius of R60.

Intended for use with SAC305 Type 4 solder, reference 88.5% metals content.

Additional assembly resources available at:

<https://epc-co.com/epc/design-support>

Efficient Power Conversion Corporation (EPC) reserves the right to make changes without further notice to any products herein to improve reliability, function or design. EPC does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

eGaN® is a registered trademark of Efficient Power Conversion Corporation.

EPC Patent Listing: <https://epc-co.com/epc/about-epc/patents>

Information subject to change without notice.