280x280x80mm AC AXIAL FAN FDA2-28080-SF Series



SALT FOG

Features:


- Motor: External Rotor Capacitor-Run Induction Motor
- Motor Protection: Thermal Protected
- Bearing Type: Two Ball
- Connection: Terminal Block
- Frame Material: Aluminum Alloy
- Impeller Material: Steel
- **Salt Fog Rated -** GR-487-CORE, ASTM B117-11, ISO 9227 Compliant
- **IP56M Certified**
- Operating Temp:
  Two Ball: -20°C~70°C
- Life Expectancy:
  Two Ball: 70,000 Hours

Fan-S Division

Model No.	Volt.	Freq.	Current	Power	Rated Speed	Maximum AirFlow		Maximum Static Pressure		Noise Level	Weight
	(VAC)	(Hz)	(A)	(W)	(rpm)	(CMM)	(CFM)	(InAq)	(mmAq)	(dB/A)	(g)
FDA2-28080NBHK4F-SF	115	50/60	0.81/1.20	94.0/136.0	2650/2900	29.15/32.55	1030/1150	0.925/0.807	23.5/20.5	70.0/73.0	3050
FDA2-28080QBHK4F-SF	230	50/60	0.43/0.63	95.0/138.0	2650/2900	29.15/32.55	1030/1150	0.925/0.807	23.5/20.5	70.0/73.0	3050

Noise is measured at the distance of one (1) meter from the axis of intake.

50Hz

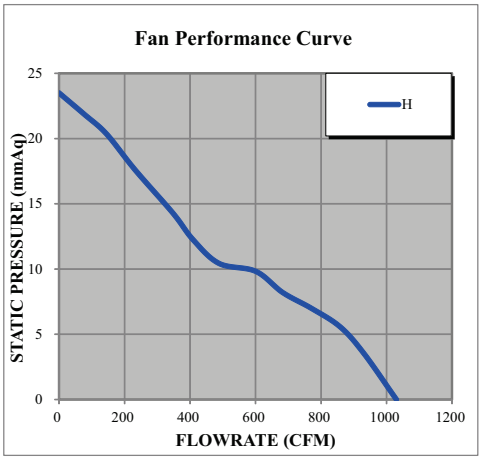

60Hz

