
Power Transformer
PC Mount: Flat Pack ™

FP24-100

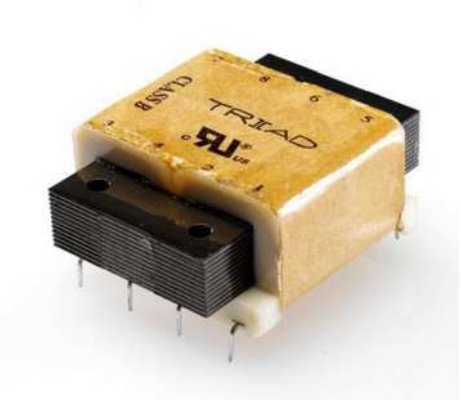

Electrical Specifications (@25C)
1. Maximum Power: 2.5 VA
2. Primary Voltage:
   Series: 230V@50/60 Hz
   Parallel: 115V@50/60Hz
3. Secondary:
   Series: 24.0VCT @ 0.100Amps
   Parallel: 12.0V @ 0.200 Amps

Description:
The FP24-100 is part of a series which has a long history of reliable service in the field, made from a proven design and constructed with UL recognized materials.

Construction:
Wound on two dual channel nylon bobbin. Materials are UL recognized, Class B (130º C) rated.

Safety:
These products are 100% tested for dielectric strength at 2KVAC, 60Hz between primary and secondary windings and between the primary / secondary windings and the core.


Agency File:
UL: File E53148, UL 506, Class B General Purpose Transformer,
cUL: File E53148, UL 506, Class B General Purpose Transformer, Canadian Use

Dimensions:


A	B	C	D	E	F
1.875	1.562	0.650	0.267	0.375	1.600

Units: In inches

Weight: 5.0 oz
Pin Dimension: .020 x .041 in

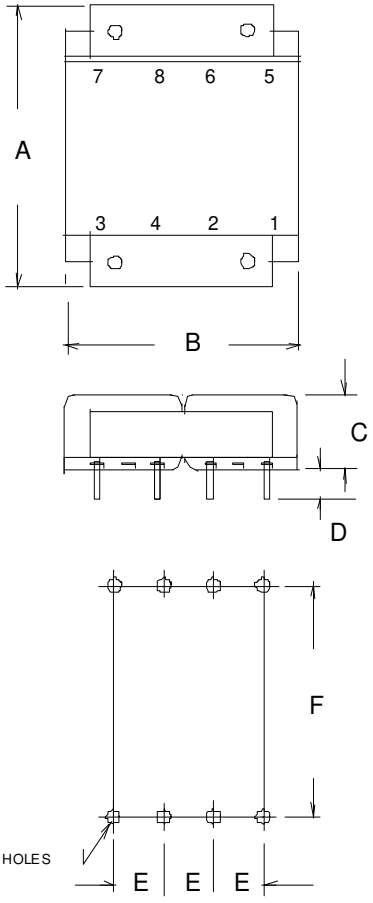

Schematic:



RoHS Compliance: As of manufacturing date February 2016, all standard products meet the requirements of 2015/863/EU, known as the RoHS 3 initiative.

*Upon printing, this document is considered “uncontrolled”. Please contact Triad Magnetics website for the most current version. For soldering and washing information please see http://www.triadmagnetics.com/faq.html

Web: www.TriadMagnetics.com
Phone 951-277-0757
Fax 951-277-2757

460 Harley Knox Blvd.
Perris, California 92571

Publish Date: June 3, 2024