
GXF Series Upgrade!

- Downsizing and high-ripple current version of GXE series
- For automobile modules and networking equipment and other high temperature applications
- Endurance with ripple current : 3,000 hours at 125℃
- Solvent resistant type except 160 to 450Vdc
- RoHS2 Compliant
- AEC-Q200 compliant : Please contact Chemi-Con for more details, test data, information.




◆SPECIFICATIONS

Items	Characteristics								
Category Temperature Range	-40 to +125℃								
Rated Voltage Range	25 to 450Vdc								
Capacitance Tolerance	±20%(M)								(20℃, 120Hz)
Leakage Current	25 to 100Vdc				160 to 450Vdc				
	I=0.03CV or 4μA, whichever is greater.				CV≦1,000	I=0.1CV+40			
					CV＞1,000	I=0.04CV+100			
	Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)								(at 20℃ after 1 minute)
Dissipation Factor (tan δ)	Rated voltage (Vdc)	25V	35V	50V	63V	80V	100V	160 to 300V	350 to 450V
	tan δ (Max.)	0.14	0.12	0.10	0.10	0.08	0.08	0.15	0.20
	When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase.								(at 20℃, 120Hz)
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (Vdc)	25V	35V	50V	63V	80V	100V	160 to 300V	350 to 450V
	Z(-25℃)/Z(+20℃)	2	2	2	2	2	2	3	6
	Z(-40℃)/Z(+20℃)	4	4	4	4	4	4	6	12 (at 120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20℃ after subjected to DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for the 3,000 hours at 125℃.								
	Rated Voltage	25 to 100Vdc			160 to 450Vdc				
	Capacitance change	≦±30% of the initial value			≦±20% of the initial value				
	D.F. (tan δ)	≦300% of the initial specified value			≦200% of the initial specified value				
	Leakage current	≦The initial specified value			≦The initial specified value				
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1,000 hours (500hours for 160 to 450Vdc) at 125℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.								
	Rated Voltage	25 to 100Vdc			160 to 450Vdc				
	Capacitance change	≦±30% of the initial value			≦±20% of the initial value				
	D.F. (tan δ)	≦300% of the initial specified value			≦200% of the initial specified value				
	Leakage current	≦The initial specified value			≦500% of the initial specified value				

◆DIMENSIONS [mm]

●Terminal Code : E

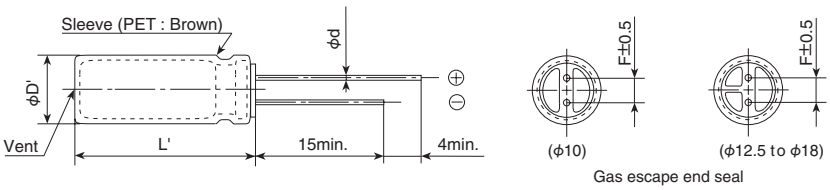

Gas escape end seal

ΦD	10	12.5	14.5	16	18
Φd	0.6	0.6	0.8	0.8	0.8
F	5.0	5.0	7.5	7.5	7.5
ΦD'	ΦD+0.5max.				
L'	L+1.5max.				

◆PART NUMBERING SYSTEM

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
E	G	X	F				E						M				S

Supplement code
Size code
Capacitance tolerance code
Capacitance code (ex.,39μF:390,100μF:101)
Lead forming·taping code
Terminal code
Voltage code (ex. 25V:250,100V:101)
Series code
Category

Please refer to "Product code guide (radial lead type)"

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers

(25 to 100Vdc)

Capacitance(μF) \ Frequency(Hz)	120	1k	10k	100k
130 to 240	0.40	0.82	0.93	1.00
270 to 560	0.50	0.85	0.94	1.00
620 to 2,000	0.60	0.87	0.95	1.00
2,200 to 4,300	0.75	0.90	0.95	1.00
4,700 to 11,000	0.85	0.95	0.98	1.00

Please contact us for lifetime estimation.

(160 to 450Vdc)

Capacitance(μF) \ Frequency(Hz)	50	120	300	1k	10k	100k
10 to 33	0.15	0.30	0.45	0.65	0.95	1.00
36 to 270	0.25	0.35	0.50	0.70	0.96	1.00

The deterioration of aluminum electrolytic capacitors accelerates their life due to the internal heating produced by ripple current. For details, refer to Section "5-3 Ripple Current Effect on Lifetime" in the catalog, Technical Note.

Product specifications in this catalog are subject to change without notice.Request our product specifications before purchase and/or use. Please use our products based on the information contained in this catalog and product specifications.

GXF Upgrade! Series

◆STANDARD RATINGS

WV (V_{dc})	Cap (μF)	Case size ϕDxL(mm)	ESR (Ωmax./100kHz)		Rated ripple current (mArms/125℃, 100kHz)	Part No.
			20℃	-40℃		
25	510	10×12.5	0.14	2.1	900	EGXF250E□□511MJC5S
	750	10×16	0.094	1.5	1,300	EGXF250E□□751MJ16S
	910	12.5×15	0.082	1.1	1,220	EGXF250E□□911MK15S
	1,200	10×20	0.073	1.1	1,540	EGXF250E□□122MJ20S
	1,200	14.5×15	0.067	0.80	1,320	EGXF250E□□122MU15S
	1,500	10×25	0.042	0.24	1,880	EGXF250E□□152MJ25S
	1,600	16×15	0.063	0.76	1,430	EGXF250E□□162ML15S
	1,800	12.5×20	0.038	0.19	1,590	EGXF250E□□182MK20S
	2,000	10×30	0.033	0.19	2,150	EGXF250E□□202MJ30S
	2,200	14.5×20	0.030	0.17	1,780	EGXF250E□□222MU20S
	2,400	18×15	0.053	0.51	1,630	EGXF250E□□242MM15S
	2,700	12.5×25	0.030	0.14	2,280	EGXF250E□□272MK25S
	3,000	16×20	0.029	0.13	1,890	EGXF250E□□302ML20S
	3,300	12.5×30	0.025	0.10	2,760	EGXF250E□□332MK30S
	3,600	14.5×25	0.025	0.11	2,760	EGXF250E□□362MU25S
	4,300	12.5×35	0.022	0.080	3,120	EGXF250E□□432MK35S
	4,300	16×25	0.022	0.092	3,030	EGXF250E□□432ML25S
	4,300	18×20	0.028	0.10	1,930	EGXF250E□□432MM20S
	4,700	14.5×30	0.020	0.081	3,090	EGXF250E□□472MU30S
	5,100	12.5×40	0.019	0.068	3,610	EGXF250E□□512MK40S
	5,100	14.5×35	0.018	0.065	3,430	EGXF250E□□512MU35S
	5,100	16×30	0.018	0.071	3,330	EGXF250E□□512ML30S
	5,600	18×25	0.020	0.078	3,200	EGXF250E□□562MM25S
	6,800	14.5×40	0.016	0.054	3,820	EGXF250E□□682MU40S
	6,800	16×35	0.016	0.056	3,630	EGXF250E□□682ML35S
	7,500	18×30	0.016	0.060	3,480	EGXF250E□□752MM30S
	8,200	16×40	0.015	0.048	3,930	EGXF250E□□822ML40S
	9,100	18×35	0.015	0.049	3,750	EGXF250E□□912MM35S
	11,000	18×40	0.014	0.043	4,040	EGXF250E□□113MM40S
35	300	10×12.5	0.14	2.1	900	EGXF350E□□301MJC5S
	510	10×16	0.094	1.5	1,300	EGXF350E□□511MJ16S
	560	12.5×15	0.082	1.1	1,220	EGXF350E□□561MK15S
	680	10×20	0.073	1.1	1,540	EGXF350E□□681MJ20S
	750	14.5×15	0.067	0.80	1,320	EGXF350E□□751MU15S
	820	10×25	0.042	0.24	1,880	EGXF350E□□821MJ25S
	1,100	12.5×20	0.038	0.19	1,590	EGXF350E□□112MK20S
	1,100	16×15	0.063	0.76	1,430	EGXF350E□□112ML15S
	1,200	10×30	0.033	0.19	2,150	EGXF350E□□122MJ30S
	1,500	12.5×25	0.030	0.14	2,280	EGXF350E□□152MK25S
	1,500	14.5×20	0.030	0.17	1,780	EGXF350E□□152MU20S
	1,500	18×15	0.053	0.51	1,630	EGXF350E□□152MM15S
	2,000	12.5×30	0.025	0.10	2,760	EGXF350E□□202MK30S
	2,000	16×20	0.029	0.13	1,890	EGXF350E□□202ML20S
	2,200	14.5×25	0.025	0.11	2,760	EGXF350E□□222MU25S
	2,400	12.5×35	0.022	0.080	3,120	EGXF350E□□242MK35S
	2,400	16×25	0.022	0.092	3,030	EGXF350E□□242ML25S
	2,400	18×20	0.028	0.10	1,930	EGXF350E□□242MM20S
	2,700	12.5×40	0.019	0.068	3,610	EGXF350E□□272MK40S
	2,700	14.5×30	0.020	0.081	3,090	EGXF350E□□272MU30S
	3,000	14.5×35	0.018	0.065	3,430	EGXF350E□□302MU35S
	3,300	16×30	0.018	0.071	3,330	EGXF350E□□332ML30S
	3,300	18×25	0.020	0.078	3,200	EGXF350E□□332MM25S
	3,900	14.5×40	0.016	0.054	3,820	EGXF350E□□392MU40S
	4,300	16×35	0.016	0.056	3,630	EGXF350E□□432ML35S
	4,300	18×30	0.016	0.060	3,480	EGXF350E□□432MM30S
	4,700	16×40	0.015	0.048	3,930	EGXF350E□□472ML40S
	5,100	18×35	0.015	0.049	3,750	EGXF350E□□512MM35S
	6,200	18×40	0.014	0.043	4,040	EGXF350E□□622MM40S
50	160	10×12.5	0.24	3.6	730	EGXF500E□□161MJC5S
	240	10×16	0.16	2.5	1,080	EGXF500E□□241MJ16S
	270	12.5×15	0.14	1.8	1,020	EGXF500E□□271MK15S
	330	10×20	0.12	1.8	1,290	EGXF500E□□331MJ20S
	390	14.5×15	0.12	1.4	1,090	EGXF500E□□391MU15S
	430	10×25	0.055	0.31	1,740	EGXF500E□□431MJ25S
	510	12.5×20	0.049	0.24	1,410	EGXF500E□□511MK20S
	560	10×30	0.041	0.25	2,020	EGXF500E□□561MJ30S
	560	16×15	0.11	1.3	1,190	EGXF500E□□561ML15S
50	680	14.5×20	0.038	0.22	1,610	EGXF500E□□681MU20S
	750	12.5×25	0.038	0.18	2,030	EGXF500E□□751MK25S
	750	18×15	0.085	0.87	1,370	EGXF500E□□751MM15S
	910	16×20	0.037	0.17	1,740	EGXF500E□□911ML20S
	1,000	12.5×30	0.031	0.14	2,510	EGXF500E□□102MK30S
	1,000	14.5×25	0.031	0.14	2,480	EGXF500E□□102MU25S
	1,200	12.5×35	0.027	0.11	2,900	EGXF500E□□122MK35S
	1,200	18×20	0.036	0.14	1,830	EGXF500E□□122MM20S
	1,300	14.5×30	0.026	0.11	2,870	EGXF500E□□132MU30S
	1,300	16×25	0.027	0.13	2,690	EGXF500E□□132ML25S
	1,500	12.5×40	0.023	0.090	3,260	EGXF500E□□152MK40S
	1,500	14.5×35	0.023	0.085	3,160	EGXF500E□□152MU35S
	1,600	16×30	0.023	0.094	3,150	EGXF500E□□162ML30S
	1,800	18×25	0.025	0.11	2,900	EGXF500E□□182MM25S
	2,000	14.5×40	0.020	0.072	3,560	EGXF500E□□202MU40S
	2,000	16×35	0.020	0.074	3,470	EGXF500E□□202ML35S
	2,200	18×30	0.021	0.079	3,330	EGXF500E□□222MM30S
	2,400	16×40	0.018	0.063	3,800	EGXF500E□□242ML40S
	2,700	18×35	0.019	0.065	3,590	EGXF500E□□272MM35S
	3,300	18×40	0.017	0.058	3,850	EGXF500E□□332MM40S
63	390	12.5×20	0.097	0.75	1,310	EGXF630E□□391MK20S
	510	12.5×25	0.072	0.55	1,880	EGXF630E□□511MK25S
	510	14.5×20	0.072	0.59	1,510	EGXF630E□□511MU20S
	620	16×20	0.062	0.39	1,630	EGXF630E□□621ML20S
	680	12.5×30	0.052	0.37	2,410	EGXF630E□□681MK30S
	680	14.5×25	0.054	0.40	2,130	EGXF630E□□681MU25S
	820	12.5×35	0.044	0.29	2,760	EGXF630E□□821MK35S
	820	18×20	0.055	0.29	1,750	EGXF630E□□821MM20S
	910	14.5×30	0.042	0.30	2,700	EGXF630E□□911MU30S
	910	16×25	0.047	0.27	2,300	EGXF630E□□911ML25S
	1,000	12.5×40	0.038	0.26	3,080	EGXF630E□□102MK40S
	1,100	14.5×35	0.037	0.24	2,940	EGXF630E□□112MU35S
	1,100	16×30	0.037	0.23	2,940	EGXF630E□□112ML30S
	1,200	18×25	0.044	0.22	2,440	EGXF630E□□122MM25S
	1,300	14.5×40	0.032	0.20	3,350	EGXF630E□□132MU40S
	1,300	16×35	0.031	0.17	3,220	EGXF630E□□132ML35S
	1,500	18×30	0.037	0.18	3,100	EGXF630E□□152MM30S
	1,800	16×40	0.028	0.15	3,590	EGXF630E□□182ML40S
	2,000	18×35	0.028	0.13	3,450	EGXF630E□□202MM35S
	2,400	18×40	0.023	0.10	3,690	EGXF630E□□242MM40S
80	240	12.5×20	0.097	0.75	1,310	EGXF800E□□241MK20S
	330	12.5×25	0.072	0.55	1,880	EGXF800E□□331MK25S
	330	14.5×20	0.072	0.59	1,510	EGXF800E□□331MU20S
	390	16×20	0.062	0.39	1,630	EGXF800E□□391ML20S
	430	12.5×30	0.052	0.37	2,410	EGXF800E□□431MK30S
	470	14.5×25	0.054	0.40	2,130	EGXF800E□□471MU25S
	560	12.5×35	0.044	0.29	2,760	EGXF800E□□561MK35S
	560	16×25	0.047	0.27	2,300	EGXF800E□□561ML25S
	560	18×20	0.055	0.29	1,750	EGXF800E□□561MM20S
	620	12.5×40	0.038	0.26	3,080	EGXF800E□□621MK40S
	620	14.5×30	0.042	0.30	2,700	EGXF800E□□621MU30S
	680	14.5×35	0.037	0.24	2,940	EGXF800E□□681MU35S
	680	16×30	0.037	0.23	2,940	EGXF800E□□681ML30S
	750	18×25	0.044	0.22	2,440	EGXF800E□□751MM25S
	820	14.5×40	0.032	0.20	3,350	EGXF800E□□821MU40S
	910	16×35	0.031	0.17	3,220	EGXF800E□□911ML35S
	910	18×30	0.037	0.18	3,100	EGXF800E□□911MM30S
	1,100	16×40	0.028	0.15	3,590	EGXF800E□□112ML40S
	1,300	18×35	0.028	0.13	3,450	EGXF800E□□132MM35S
	1,500	18×40	0.023	0.10	3,690	EGXF800E□□152MM40S
100	130	12.5×20	0.12	0.94	1,210	EGXF101E□□131MK20S
	180	14.5×20	0.082	0.69	1,450	EGXF101E□□181MU20S
	200	12.5×25	0.082	0.70	1,800	EGXF101E□□201MK25S
	240	12.5×30	0.062	0.52	2,290	EGXF101E□□241MK30S
	240	16×20	0.071	0.53	1,580	EGXF101E□□241ML20S
	270	14.5×25	0.064	0.52	2,050	EGXF101E□□271MU25S
	330	12.5×35	0.051	0.38	2,680	EGXF101E□□331MK35S

Product specifications in this catalog are subject to change without notice.Request our product specifications before purchase and/or use. Please use our products based on the information contained in this catalog and product specifications.

GXF Upgrade! Series

◆STANDARD RATINGS

WV (V_{dc})	Cap (μF)	Case size ϕDxL(mm)	ESR (Ωmax./100kHz) 20℃	ESR (Ωmax./100kHz) -40℃	Rated ripple current (mArms/125℃, 100kHz)	Part No.
100	330	16×25	0.057	0.39	2,190	EGXF101E□□331ML25S
	330	18×20	0.069	0.39	1,690	EGXF101E□□331MM20S
	360	14.5×30	0.050	0.40	2,620	EGXF101E□□361MU30S
	390	12.5×40	0.044	0.33	2,970	EGXF101E□□391MK40S
	390	14.5×35	0.044	0.33	2,850	EGXF101E□□391MU35S
	390	16×30	0.044	0.33	2,770	EGXF101E□□391ML30S
	430	18×25	0.054	0.32	2,310	EGXF101E□□431MM25S
	510	14.5×40	0.038	0.26	3,230	EGXF101E□□511MU40S
	510	16×35	0.037	0.26	3,010	EGXF101E□□511ML35S
	560	18×30	0.043	0.26	2,830	EGXF101E□□561MM30S
	620	16×40	0.032	0.21	3,320	EGXF101E□□621ML40S
	680	18×35	0.034	0.19	3,210	EGXF101E□□681MM35S
	820	18×40	0.029	0.16	3,410	EGXF101E□□821MM40S
*1 160	51	10×20	—	—	900	EGXF161E□□510MJ20S
	62	10×25	—	—	1,200	EGXF161E□□620MJ25S
	75	12.5×20	—	—	1,220	EGXF161E□□750MK20S
	82	10×30	—	—	1,410	EGXF161E□□820MJ30S
	100	10×35	—	—	1,600	EGXF161E□□101MJ35S
	100	14.5×20	—	—	1,340	EGXF161E□□101MU20S
	110	12.5×25	—	—	1,510	EGXF161E□□111MK25S
	120	10×40	—	—	1,790	EGXF161E□□121MJ40S
	130	16×20	—	—	1,500	EGXF161E□□131ML20S
	150	12.5×30	—	—	1,770	EGXF161E□□151MK30S
	150	14.5×25	—	—	1,610	EGXF161E□□151MU25S
	180	12.5×35	—	—	1,970	EGXF161E□□181MK35S
	180	14.5×30	—	—	1,880	EGXF161E□□181MU30S
	180	18×20	—	—	1,730	EGXF161E□□181MM20S
	200	12.5×40	—	—	2,150	EGXF161E□□201MK40S
	200	16×25	—	—	1,850	EGXF161E□□201ML25S
	220	14.5×35	—	—	2,030	EGXF161E□□221MU35S
	240	18×25	—	—	2,050	EGXF161E□□241MM25S
	270	14.5×40	—	—	2,250	EGXF161E□□271MU40S
*1 200	36	10×20	—	—	900	EGXF201E□□360MJ20S
	43	10×25	—	—	1,200	EGXF201E□□430MJ25S
	56	12.5×20	—	—	1,220	EGXF201E□□560MK20S
	62	10×30	—	—	1,410	EGXF201E□□620MJ30S
	75	10×35	—	—	1,600	EGXF201E□□750MJ35S
	75	14.5×20	—	—	1,340	EGXF201E□□750MU20S
	82	10×40	—	—	1,790	EGXF201E□□820MJ40S
	82	12.5×25	—	—	1,510	EGXF201E□□820MK25S
	100	12.5×30	—	—	1,770	EGXF201E□□101MK30S
	100	16×20	—	—	1,500	EGXF201E□□101ML20S
	110	14.5×25	—	—	1,610	EGXF201E□□111MU25S
	130	12.5×35	—	—	1,970	EGXF201E□□131MK35S
	130	14.5×30	—	—	1,880	EGXF201E□□131MU30S
	130	18×20	—	—	1,730	EGXF201E□□131MM20S
	150	12.5×40	—	—	2,150	EGXF201E□□151MK40S
	150	16×25	—	—	1,850	EGXF201E□□151ML25S
	160	14.5×35	—	—	2,030	EGXF201E□□161MU35S
	180	18×25	—	—	2,050	EGXF201E□□181MM25S
	200	14.5×40	—	—	2,250	EGXF201E□□201MU40S
*1 250	24	10×20	—	—	900	EGXF251E□□240MJ20S
	30	10×25	—	—	1,200	EGXF251E□□300MJ25S
	36	12.5×20	—	—	1,220	EGXF251E□□360MK20S
	39	10×30	—	—	1,410	EGXF251E□□390MJ30S
	47	10×35	—	—	1,600	EGXF251E□□470MJ35S
	51	12.5×25	—	—	1,510	EGXF251E□□510MK25S
	51	14.5×20	—	—	1,340	EGXF251E□□510MU20S
	56	10×40	—	—	1,790	EGXF251E□□560MJ40S
	62	16×20	—	—	1,500	EGXF251E□□620ML20S
	68	12.5×30	—	—	1,770	EGXF251E□□680MK30S
	68	14.5×25	—	—	1,610	EGXF251E□□680MU25S
	82	12.5×35	—	—	1,970	EGXF251E□□820MK35S
	82	18×20	—	—	1,730	EGXF251E□□820MM20S
	91	14.5×30	—	—	1,880	EGXF251E□□910MU30S
	91	16×25	—	—	1,850	EGXF251E□□910ML25S
	100	12.5×40	—	—	2,150	EGXF251E□□101MK40S
	100	14.5×35	—	—	2,030	EGXF251E□□101MU35S
	120	18×25	—	—	2,050	EGXF251E□□121MM25S
	130	14.5×40	—	—	2,250	EGXF251E□□131MU40S

WV (V_{dc})	Cap (μF)	Case size ϕDxL(mm)	ESR (Ωmax./100kHz) 20℃	ESR (Ωmax./100kHz) -40℃	Rated ripple current (mArms/125℃, 100kHz)	Part No.
*1 275	20	10×20	—	—	900	EGXF2H1E□□200MJ20S
	27	10×25	—	—	1,200	EGXF2H1E□□270MJ25S
	30	12.5×20	—	—	1,120	EGXF2H1E□□300MK20S
	36	10×30	—	—	1,410	EGXF2H1E□□360MJ30S
	43	12.5×25	—	—	1,430	EGXF2H1E□□430MK25S
	47	10×35	—	—	1,600	EGXF2H1E□□470MJ35S
	51	10×40	—	—	1,790	EGXF2H1E□□510MJ40S
	51	16×20	—	—	1,360	EGXF2H1E□□510ML20S
	56	12.5×30	—	—	1,690	EGXF2H1E□□560MK30S
*1 300	20	10×20	—	—	900	EGXF301E□□200MJ20S
	22	10×25	—	—	1,200	EGXF301E□□220MJ25S
	27	12.5×20	—	—	1,120	EGXF301E□□270MK20S
	30	10×30	—	—	1,410	EGXF301E□□300MJ30S
	36	10×35	—	—	1,600	EGXF301E□□360MJ35S
	36	12.5×25	—	—	1,430	EGXF301E□□360MK25S
	43	16×20	—	—	1,360	EGXF301E□□430ML20S
	47	10×40	—	—	1,790	EGXF301E□□470MJ40S
	47	12.5×30	—	—	1,690	EGXF301E□□470MK30S
*1 350	16	10×20	—	—	460	EGXF351E□□160MJ20S
	20	10×25	—	—	610	EGXF351E□□200MJ25S
	24	12.5×20	—	—	680	EGXF351E□□240MK20S
	27	10×30	—	—	720	EGXF351E□□270MJ30S
	33	10×35	—	—	820	EGXF351E□□330MJ35S
	33	14.5×20	—	—	870	EGXF351E□□330MU20S
	36	10×40	—	—	940	EGXF351E□□360MJ40S
	36	12.5×25	—	—	980	EGXF351E□□360MK25S
	43	16×20	—	—	970	EGXF351E□□430ML20S
	47	12.5×30	—	—	1,210	EGXF351E□□470MK30S
	47	14.5×25	—	—	1,210	EGXF351E□□470MU25S
	56	12.5×35	—	—	1,330	EGXF351E□□560MK35S
	56	16×25	—	—	1,130	EGXF351E□□560ML25S
	56	18×20	—	—	1,060	EGXF351E□□560MM20S
	62	14.5×30	—	—	1,410	EGXF351E□□620MU30S
	68	12.5×40	—	—	1,450	EGXF351E□□680MK40S
	68	14.5×35	—	—	1,590	EGXF351E□□680MU35S
	75	18×25	—	—	1,200	EGXF351E□□750MM25S
	91	14.5×40	—	—	1,820	EGXF351E□□910MU40S
*1 400	12	10×20	—	—	460	EGXF401E□□120MJ20S
	16	10×25	—	—	610	EGXF401E□□160MJ25S
	20	10×30	—	—	720	EGXF401E□□200MJ30S
	20	12.5×20	—	—	680	EGXF401E□□200MK20S
	24	10×35	—	—	820	EGXF401E□□240MJ35S
	24	14.5×20	—	—	870	EGXF401E□□240MU20S
	27	12.5×25	—	—	980	EGXF401E□□270MK25S
	30	10×40	—	—	940	EGXF401E□□300MJ40S
	33	16×20	—	—	970	EGXF401E□□330ML20S
	36	12.5×30	—	—	1,210	EGXF401E□□360MK30S
	36	14.5×25	—	—	1,210	EGXF401E□□360MU25S
	43	12.5×35	—	—	1,330	EGXF401E□□430MK35S
	43	18×20	—	—	1,060	EGXF401E□□430MM20S
	47	14.5×30	—	—	1,410	EGXF401E□□470MU30S
	47	16×25	—	—	1,130	EGXF401E□□470ML25S
	51	12.5×40	—	—	1,450	EGXF401E□□510MK40S
	56	14.5×35	—	—	1,590	EGXF401E□□560MU35S
	62	18×25	—	—	1,200	EGXF401E□□620MM25S
	68	14.5×40	—	—	1,820	EGXF401E□□680MU40S
*1 450	10	10×20	—	—	460	EGXF451E□□100MJ20S
	13	10×25	—	—	610	EGXF451E□□130MJ25S
	18	10×30	—	—	720	EGXF451E□□180MJ30S
	18	12.5×20	—	—	680	EGXF451E□□180MK20S
	22	10×35	—	—	820	EGXF451E□□220MJ35S
	24	10×40	—	—	940	EGXF451E□□240MJ40S
	24	12.5×25	—	—	980	EGXF451E□□240MK25S
	27	16×20	—	—	970	EGXF451E□□270ML20S
	33	12.5×30	—	—	1,210	EGXF451E□□330MK30S
	39	12.5×35	—	—	1,330	EGXF451E□□390MK35S
	39	16×25	—	—	1,130	EGXF451E□□390ML25S
	39	18×20	—	—	1,060	EGXF451E□□390MM20S
	47	12.5×40	—	—	1,450	EGXF451E□□470MK40S
	56	18×25	—	—	1,200	EGXF451E□□560MM25S

□□ : Enter the appropriate lead forming or taping code.
*1: Assembly boards with the designated products attached cannot be cleaned.
New products are indicated in red text.

Product specifications in this catalog are subject to change without notice.Request our product specifications before purchase and/or use. Please use our products based on the information contained in this catalog and product specifications.

■ Always read "Notes on Use" before using the product in order to enable you to use the product correctly and prevent any faults and accidents from occurring.

■ Request the Product Specification on the product of NIPPON CHEMI-CON CORPORATION to refer to it as well as this brochure prior to the order of the products. Some specific notes on use of the ordered product may be described in the specifications.

■ The products listed in this catalog are designed and manufactured for general electronics equipment use and are not intended for use in applications that can adversely affect human life; where the malfunction of equipment may cause damage to life or property. In addition, our products are not intended to be used in specific applications that may cause a major social impact. Please consult with us in advance of usage of our products in the following listed applications. ① Aerospace equipment ② Power generation equipment such as thermal power, nuclear power etc. ③ Medical equipment ④ Transport equipment (automobiles, trains, ships, etc.) ⑤ Transportation control equipment ⑥ Disaster prevention / crime prevention equipment ⑦ Highly publicized information processing equipment ⑧ Submarine equipment ⑨ Other applications that are not considered general-purpose applications.

■ The circuits described as examples in this catalog and the "delivery specifications" are featured in order to show the operations and usage of our products, however, this fact does not guarantee that the circuits are available to function in your equipment systems. We are not in any case responsible for any failures or damage caused by the use of information contained herein. You should examine our products, of which the characteristics are described in the "delivery specifications" and other documents, and determine whether or not our products suit your requirements according to the specifications of your equipment systems. Therefore, you bear final responsibility regarding the use of our products.
Please make sure that you take appropriate safety measures such as use of redundant design and malfunction prevention measures in order to prevent fatal accidents and/or fires in the event any of our products malfunction.

■ We strongly recommend our customers to purchase Nippon Chemi-Con products only through our official sales channels. We assume no responsibility for any defects or damages caused by using products purchased from outside our official sales channel or of counterfeit goods. In addition, we will ask the customer to pay the investigation cost for products purchased outside our official sales channel.

■ We reserve the right to discontinue production and delivery of products. We do not guarantee that all the products included in this catalog will be available in the future.
The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products

■ We continually strive to improve the quality and reliability of our products, but in any case that our product does not meet our published specifications, please stop using it promptly and contact us immediately. As for compensation for non-conforming goods delivered by Chemi-Con, we will limit it only to goods found in non-compliance of our published specifications. This may be accomplished by a no cost replacement of non-conforming individual products, a credit of the piece price paid per each individual non-conforming product, or in other ways deemed necessary.
In addition, we have an established system with enhanced traceability, therefore we will limit the applicable lot items for any potential compensation.

Part Numbering System
Part Numbering System (Appendix)
Standardization
Available Items by Manufacturing Locations
Environmental Measures
Technical Note
Precautions and Guidelines
Recommended Soldering Conditions
Taping, Lead-preforming and Packaging
Available Terminals for Snap-in and Screw Mount Type

Product specifications in this catalog are subject to change without notice.Request our product specifications before purchase and/or use. Please use our products based on the information contained in this catalog and product specifications.

CAT. No. E1001A 2026