
CLIFF

GOLD SWITCHED JACK SOCKETS

6.35mm JACK SOCKET




CL11607A

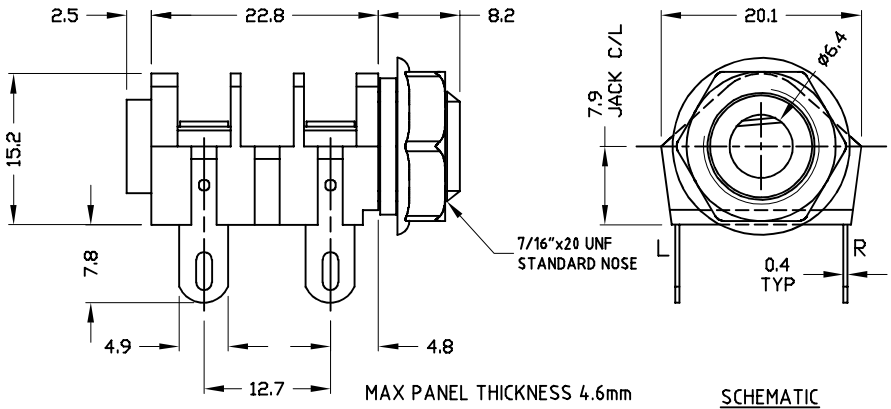




CL12207A

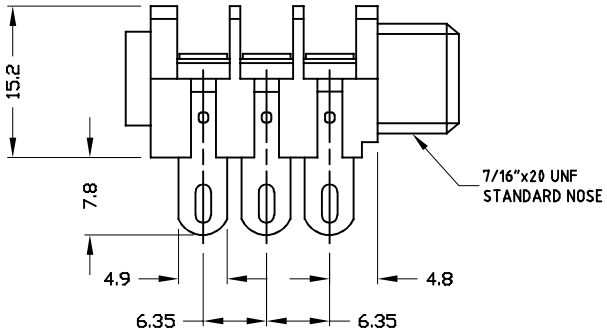


SCHEMATIC

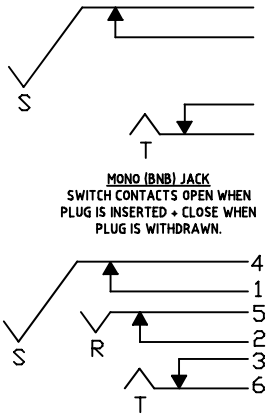




CL12327A

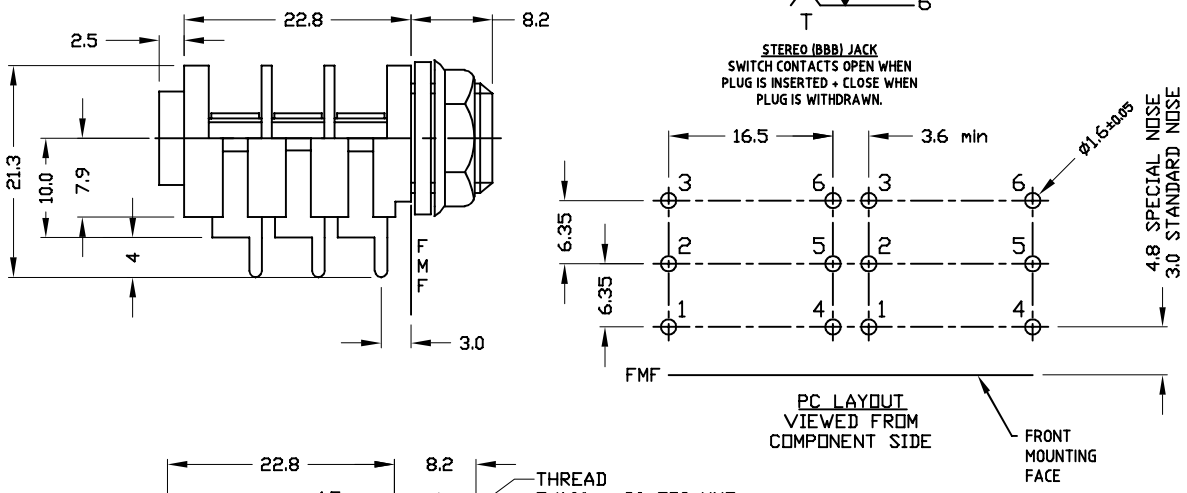



CL12345

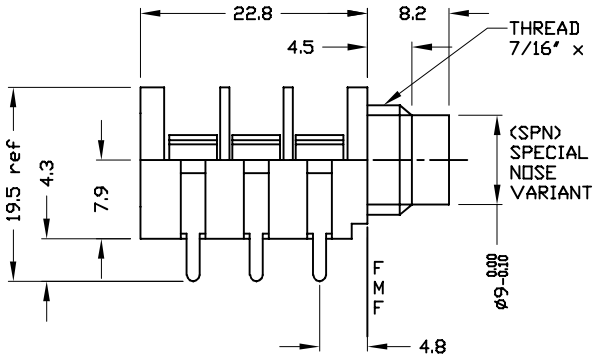

SPECIFICATION

Withstand voltage:	2000V DC Min.
Maximum Current:	5A
Temperature Rating:	-10° C to +70° C
Life (Minimum):	10,000+ Operations
Nominal Contact Resistance:	<50mΩ

DESCRIPTION


CL11607A - Jack Socket Mono S2/BNB Solder Tag. Supplied assembled
CL12207A - Jack Socket Stereo S2/BBB Solder Tag. Supplied assembled
CL12327A - Jack Socket Stereo S2/BBB PC Tag Type A. Supplied assembled
CL12345 - Jack Socket Stereo S2/BBB Special Nose PC Tag Type C. No nut or washers.

GOLD SWITCHED JACK SOCKETS

6.35mm JACK SOCKET




CL1227G

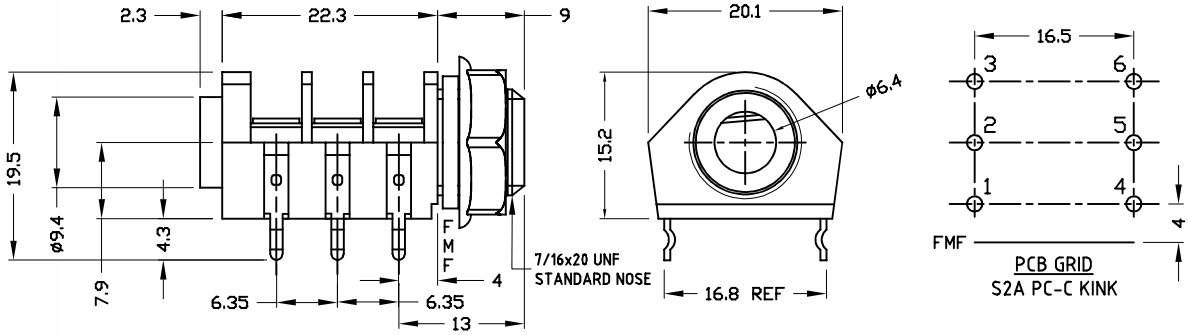

6.35mm JACK SOCKET




CL13345A

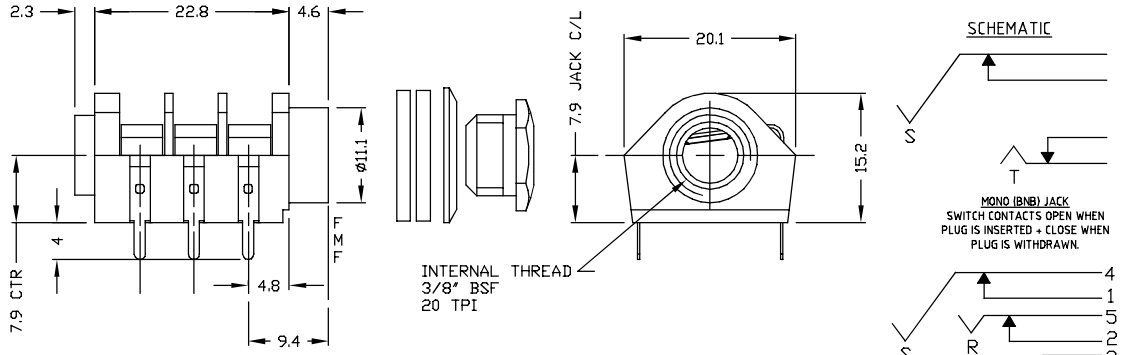




CL1308GA

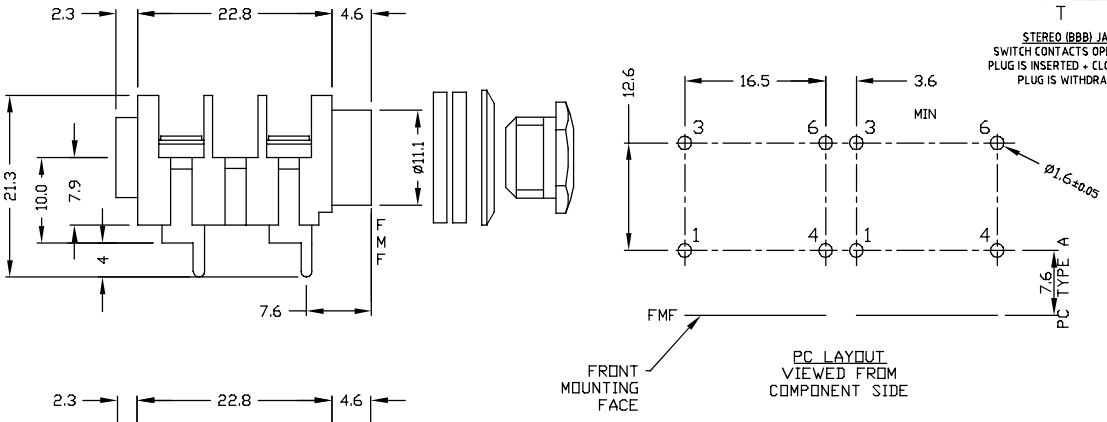



CL13106GA

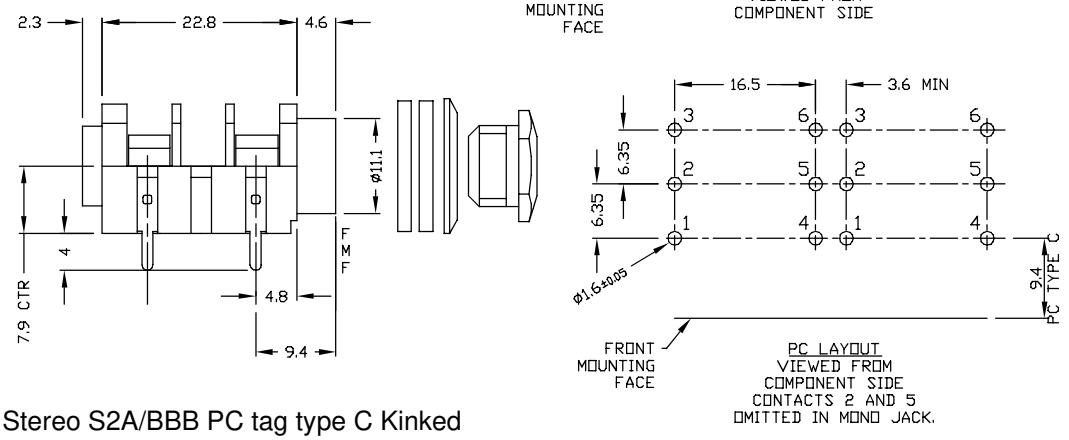

DESCRIPTION

CL1227G - Jack Socket Stereo S2A/BBB PC tag type C Kinked
CL13345A - Jack Socket Stereo S4/BBB PC tag type C. Supplied assembled
CL1308GA - Jack Socket Mono S4/BNB PC tag type A. Supplied assembled
CL13106GA - Jack Socket Mono S4/BNB PC tag type C. Supplied assembled

CLIFF

GOLD SWITCHED JACK SOCKETS


6.35mm JACK SOCKET





CL1299A



CL1323A

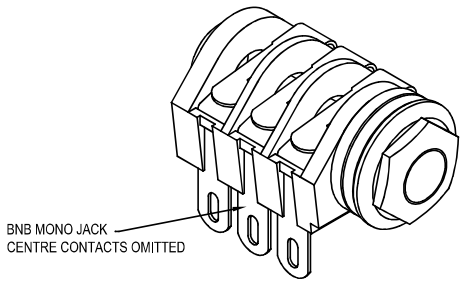



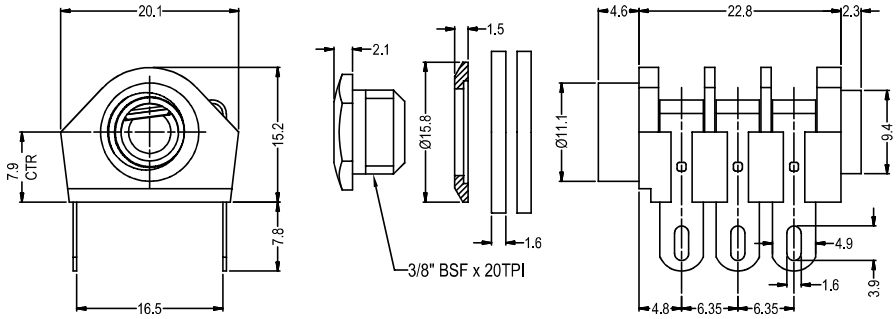

DESCRIPTION

CL1299A - Jack Socket Mono S4/BNB Solder Tag. Supplied assembled
CL1323A - Jack Socket Stereo S4/BBB Solder Tag. Supplied assembled

---


3.5mm JACK SOCKET



CL13845GA





CL13843G

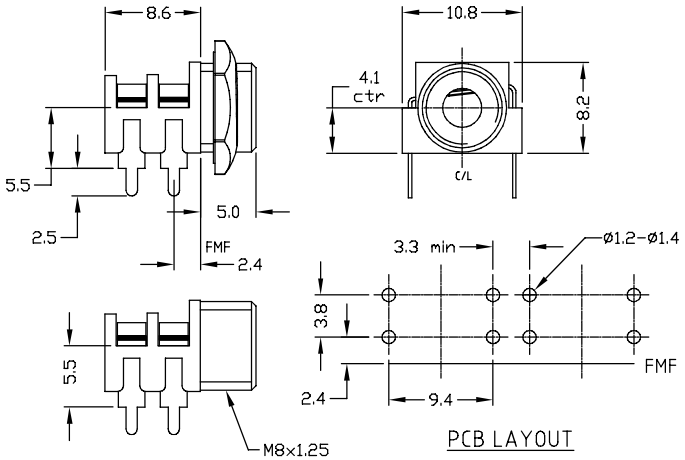




FCR1295GA










SPECIFICATIONS

- WITHSTAND VOLTAGE: 2000V DC min
- MAXIMUM CURRENT: 5A
- TEMPERATURE RANGE: -10°C TO +70°C
- LIFE (MINIMUM): 5,000+ OPERATIONS
- CONTACT RESISTANCE <50mΩ



SWITCH CONTACTS OPEN WHEN PLUG IS INSERTED, CLOSE WHEN PLUG IS WITHDRAWN.





DESCRIPTION

CL13845GA - 3.5mm Jack Socket S6G/BB with nut. Supplied assembled
CL13843G - 3.5mm Jack Socket S6G/BB without nut
CL1295GA - 3.5mm Stereo Jack Socket S9/BBB with 6mm PCB legs. Supplied assembled

GOLD SWITCHED JACK SOCKETS

JACK SOCKET ACCESSORIES



CL14218 - BLACK COMBINED NUT/BEZEL
FOR S4 TYPE JACK SOCKET




CL14218GY - GREY COMBINED NUT/BEZEL
FOR S4 TYPE JACK SOCKET



CL14218R - RED COMBINED NUT/BEZEL
FOR S4 TYPE JACK SOCKET



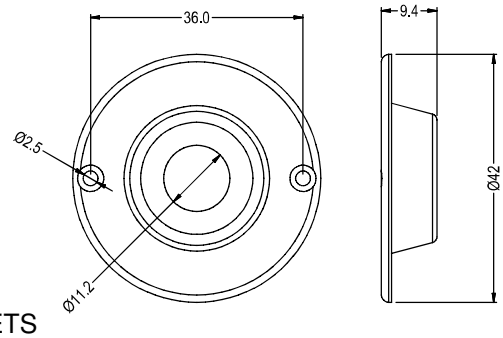

CL1396 - RECESS PLATE TO ALLOW
FLUSH MOUNTING OF 6.35mm JACK SOCKETS

© CLIFF 01/2021 ISS.1

For further information, contact sales@cliffuk.co.uk

Cliff Electronic Components Limited,
76 Holmethorpe Avenue, Holmethorpe Ind. Estate,
Redhill, Surrey RH1 2PF U.K.
Tel: +44 (0)1737 771375 Fax: +44 (0)1737 766012

RoHS

www.cliffuk.co.uk