
MAX LETATWIN Wire Marking System

HALF-CUT ROUND TUBING SOLUTIONS




HALF-CUT ROUND TUBING SOLUTIONS







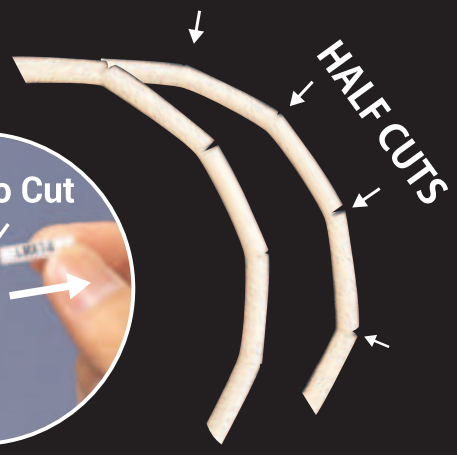


Round tubing for wire marking may be a less familiar method than heat shrink or wrap around, but with the MAX LETATWIN half-cut technology, productivity for tube wire marking is significantly increased. It does not require heaters, scissors or screwdrivers. Just pull apart the half-cut tubing by hand, and insert the wire to make your excellent marker!

NOT NEEDED Cutting out with Scissors




NOT NEEDED Peel off & Wrap around

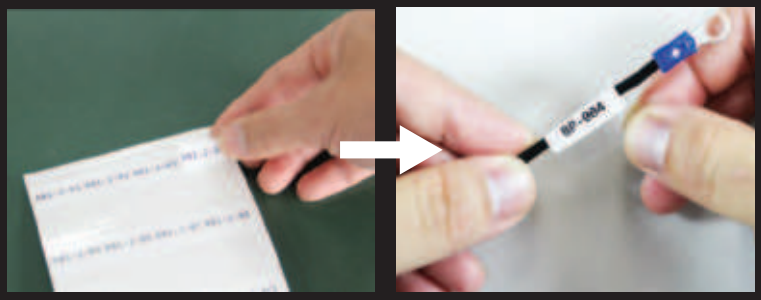

NOT NEEDED Using Heat Gun



NOT NEEDED Open the Tubing with a Screwdriver

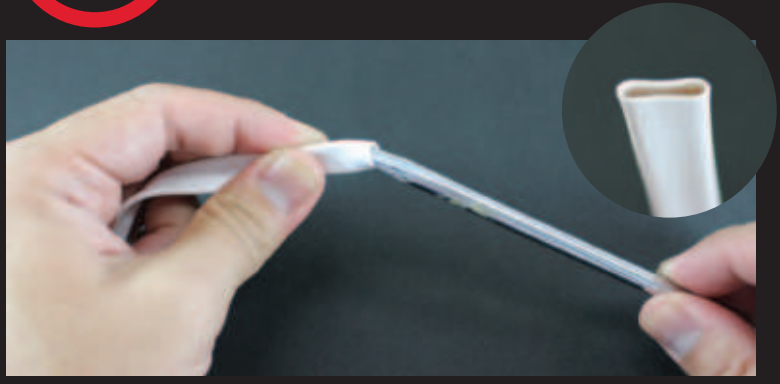

MAX LETATWIN

How it works




Check the wire diameter.




Wire Size			Recommended Tubing Diameter (ϕmm)
AWG	SQ	DIN	
AWG 22	0.30	0.34	1.5–2.0
AWG 20	0.50	0.50	2.5
AWG 18	0.75	0.75	3.2
AWG 16	1.25	1.50	
AWG 14	2.00	2.50	3.6
AWG 12	3.50	4.00	4.2
AWG 10	5.50	6.00	5.2
AWG 8	8.00	10.00	6.0–6.5
AWG 6	14.00	16.00	8.0

Select appropriate tubing size.



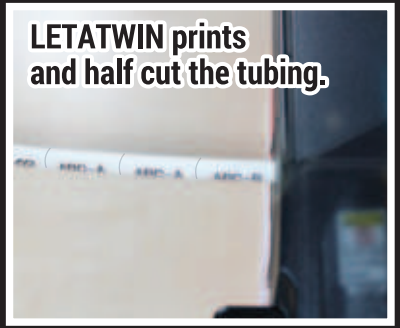



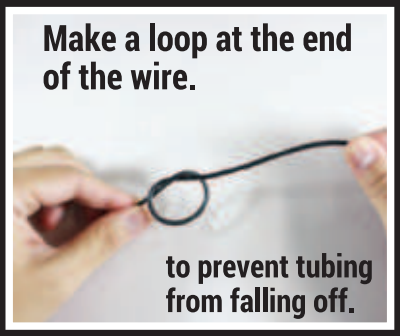









MAX UL Round Tubing
LM-TU3xxN2 series
(105°C,600V,E171616)

LM-TU332N2 White	3.2mm dia. x 100m
LM-TU336N2 White	3.6mm dia. x 100m
LM-TU342N2 White	4.2mm dia. x 80m
LM-TU352N2 White	5.2mm dia. x 80m

LETATWIN Consumables and Printer

LETATWIN Round Tubing

UL TUBING (VINYL) 1ROLL/BOX

LM-TU332N2 WHITE	φ3.2mm×100m/ROLL
LM-TU336N2 WHITE	φ3.6mm×100m/ROLL
LM-TU342N2 WHITE	φ4.2mm× 80m/ROLL
LM-TU352N2 WHITE	φ5.2mm× 80m/ROLL





VINYL TUBING (NOT UL ACQUIRED) 1ROLL/BOX

LM-TU432L WHITE	φ3.2mm×200m/ROLL
LM-TU436L WHITE	φ3.6mm×200m/ROLL
LM-TU442L WHITE	φ4.2mm×200m/ROLL
LM-TU452L WHITE	φ5.2mm×135m/ROLL
LM-TU464L WHITE	φ6.4mm×100m/ROLL
LM-TU480L WHITE	φ8.0mm× 70m/ROLL



LETATWIN Printer LM-550A/PC

Name	ELECTRONIC LETTERING MACHINE **LM 550A/PC**
Dimensions	295 (W)×293 (D)×94 (H) mm
Weight	2.4kg
Printing method	Thermal transfer method (300dpi)
Display	LCD dot matrix : 64×160 Pixel (Backlit)
Internal memory	250,000 characters (Maximum 50 files)
External memory	USB memory

Printing speed	40mm/s (Standard) 20mm/s (Low temp. mode)
Interface	USB 2.0 full speed
Power supply	DC12V, 3.0A Use only specified AC Adapter (100V~240V) included in the package
Usable tube	φ1.5mm ~ 8.0mm (Vinyl Tubing) (For φ1.5~2.0mm tubes, the dedicated attachment (standard accessory) is required.) φ2.0mm ~ 6.5mm (Heat Shrink Tubing)
Usable tape	Width 5, 9, 12mm (Max genuine tape)




Consumables are only LM-IR50B(Black ink-ribbon)
1roll and LM-RC500(Ink Ribbon Case) 1pcs included in Carry Case

LETATWIN Ink Ribbon and Tape

INK RIBBON CASE

LM-RC500
20PCS./CTN




ECONOMICAL INK RIBBON REFILLS 10 ROLLS/BOX

LM-IR50B (BLACK)	110m/ROLL

INK RIBBON REFILLS FOR HEAT SHRINK TUBING 10 ROLLS/BOX

LM-IR50BP (BLACK)	110m/ROLL
LM-IR50W (WHITE)	70m/ROLL



POLYESTER TAPE CASSETTE 10PCS./BOX

LM-TP505W (WHITE)	5mm(W)×16m(L)/PC
LM-TP505Y (YELLOW)	5mm(W)× 8m(L)/PC
LM-TP505T (TRANSPARENT)	5mm(W)× 8m(L)/PC
LM-TP509W (WHITE)	9mm(W)×16m(L)/PC
LM-TP509Y (YELLOW)	9mm(W)× 8m(L)/PC
LM-TP509T (TRANSPARENT)	9mm(W)× 8m(L)/PC
LM-TP512W (WHITE)	12mm(W)×16m(L)/PC
LM-TP512Y (YELLOW)	12mm(W)× 8m(L)/PC



MAX USA CORP.
257 East 2nd Street, Mineola, NY 11501
Phone: 800-223-4293 Fax: 516-741-3272
WWW.MAXUSACORP.COM/SIGN_MARKING

Watch the introduction and testimonial videos through our website ▶▶▶