


Customer Information Sheet

DRAWING No.: S1741-46R	IF IN DOUBT - ASK	©	NOT TO SCALE	THIRD ANGLE PROJECTION	ALL DIMENSIONS IN mm

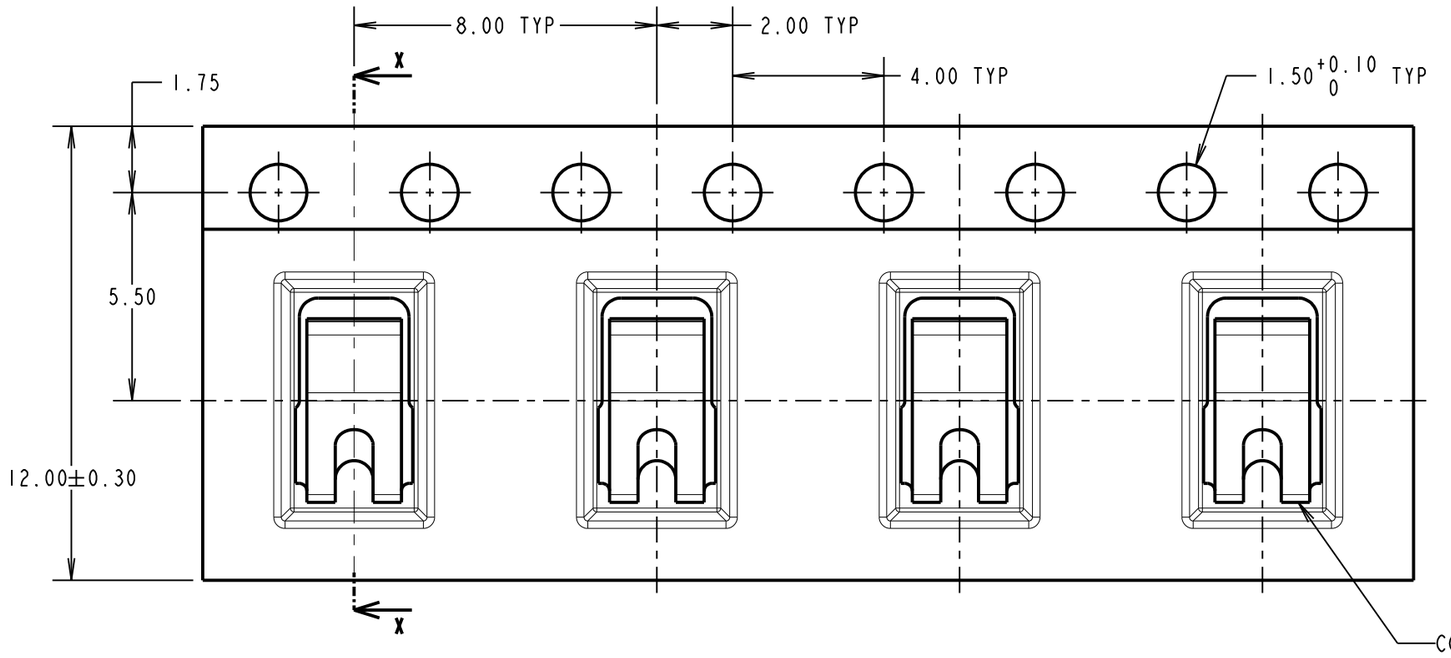


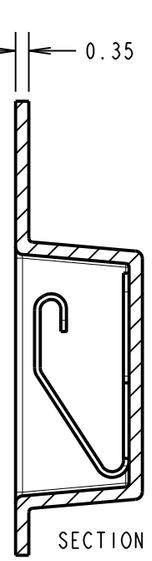

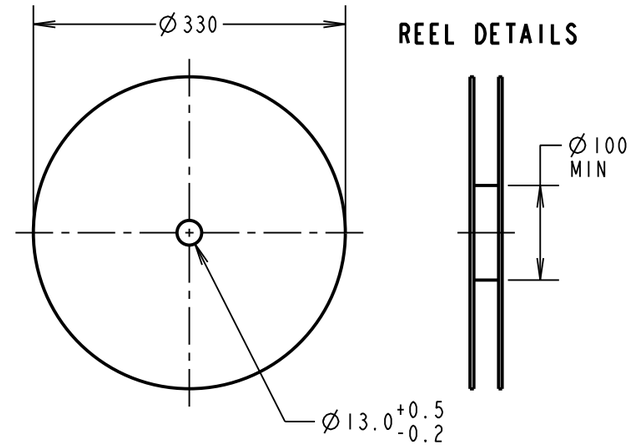


NOTES:
1. QUANTITY PER REEL = 2500.
2. THIS PRODUCT IS TAPED AND REELED IN ACCORDANCE WITH EIA-481 (ELECTRONIC INDUSTRIES ASSOCIATION).


COMPONENT SPECIFICATION:
MATERIAL = PHOSPHOR BRONZE
FINISH = 4µm BRIGHT 100% TIN OVER 2µm NICKEL
RECOMMENDED WORKING HEIGHT = 1.75mm / MIN FORCE = 1.5N
MINIMUM WORKING HEIGHT = 1.50mm / MAX FORCE = 3.0N
ELECTRICAL:
CURRENT RATING = 6A
MECHANICAL:
DURABILITY = 5000 CYCLES
ENVIRONMENTAL:
OPERATING TEMPERATURE = -55°C TO +125°C

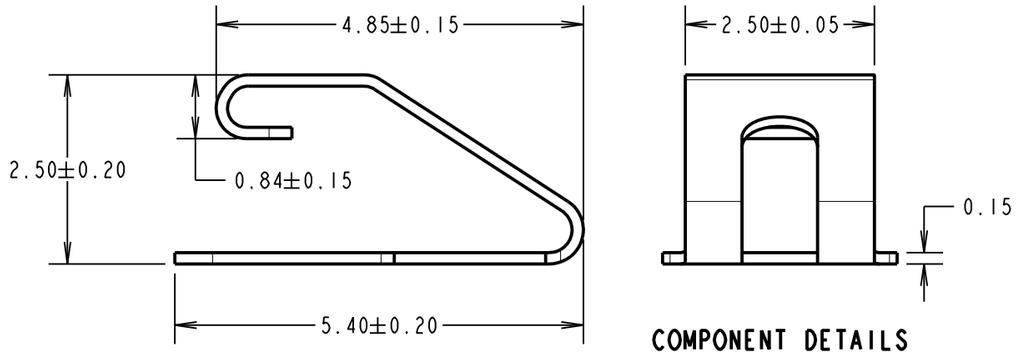



COMPONENT DETAILS

RECOMMENDED PAD LAYOUT

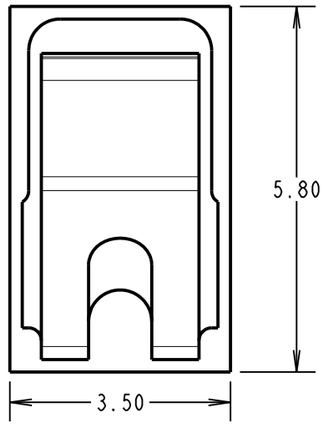

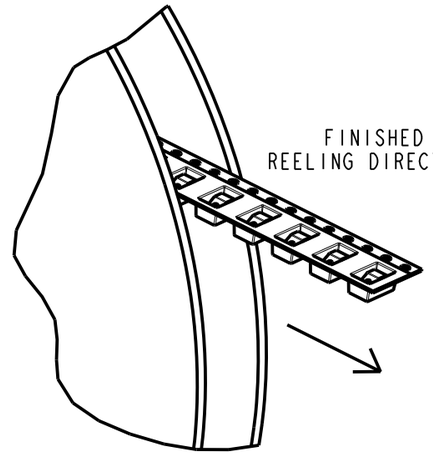

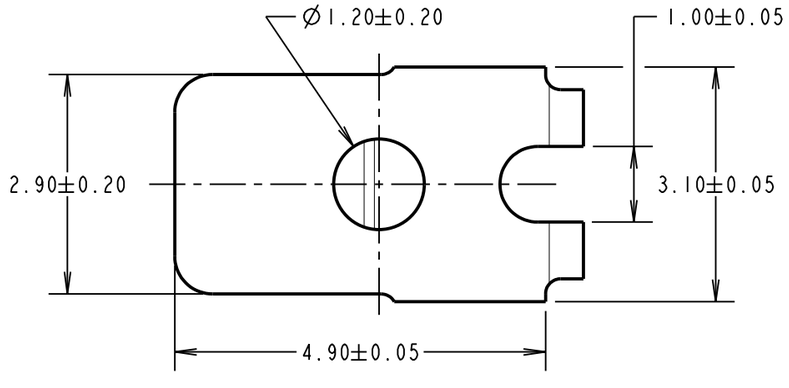

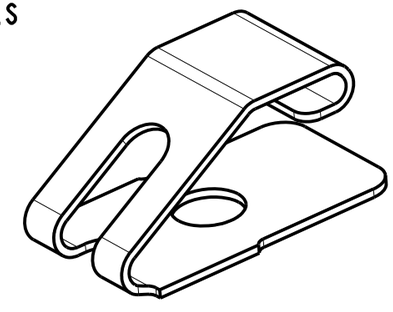

MGP	4	11.01.22	31219
NAME	ISS.	DATE	CN/CO
APPROVED: MGP			
CHECKED: RTP			
DRAWN: N.CODLING			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWiN
www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
X. = ±1mm
X.X = ±0.50mm
X.XX = ±0.20mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

MATERIAL: SEE ABOVE

FINISH: SEE ABOVE

S/AREA: mm²

TITLE: S1741-46 SMT CONTACT IN TAPE AND REEL

DRAWING NUMBER: S1741-46R

SHT 2 OF 2