CMOS Static RAM 1 Meg (64K x 16-Bit)

IDT71016

Features

- **64K x 16 advanced high-speed CMOS Static RAM**
- **Equal access and cycle times**
  - *Commercial and Industrial: 12/15/20ns*
- **One Chip Select plus one Output Enable pin**
- **Bidirectional data inputs and outputs directly TTL-compatible**
- **Low power consumption via chip deselect**
- **Upper and Lower Byte Enable Pins**
- **Commercial and industrial product available in 44-pin Plastic SOJ package and 44-pin TSOP package**


Description

The IDT71016 is a 1,048,576-bit high-speed Static RAM organized as 64K x 16. It is fabricated using IDT's high-perfomance, high-reliability CMOS technology. This state-of-the-art technology, combined with innovative circuit design techniques, provides a cost-effective solution for high-speed memory needs.

The IDT71016 has an output enable pin which operates as fast as 7ns, with address access times as fast as 12ns. All bidirectional inputs and outputs of the IDT71016 are TTL-compatible and operation is from a single 5V supply. Fully static asynchronous circuitry is used, requiring no clocks or refresh for operation.

The IDT71016 is packaged in a JEDEC standard 44-pin Plastic SOJ and 44-pin TSOP Type II.


Functional Block Diagram

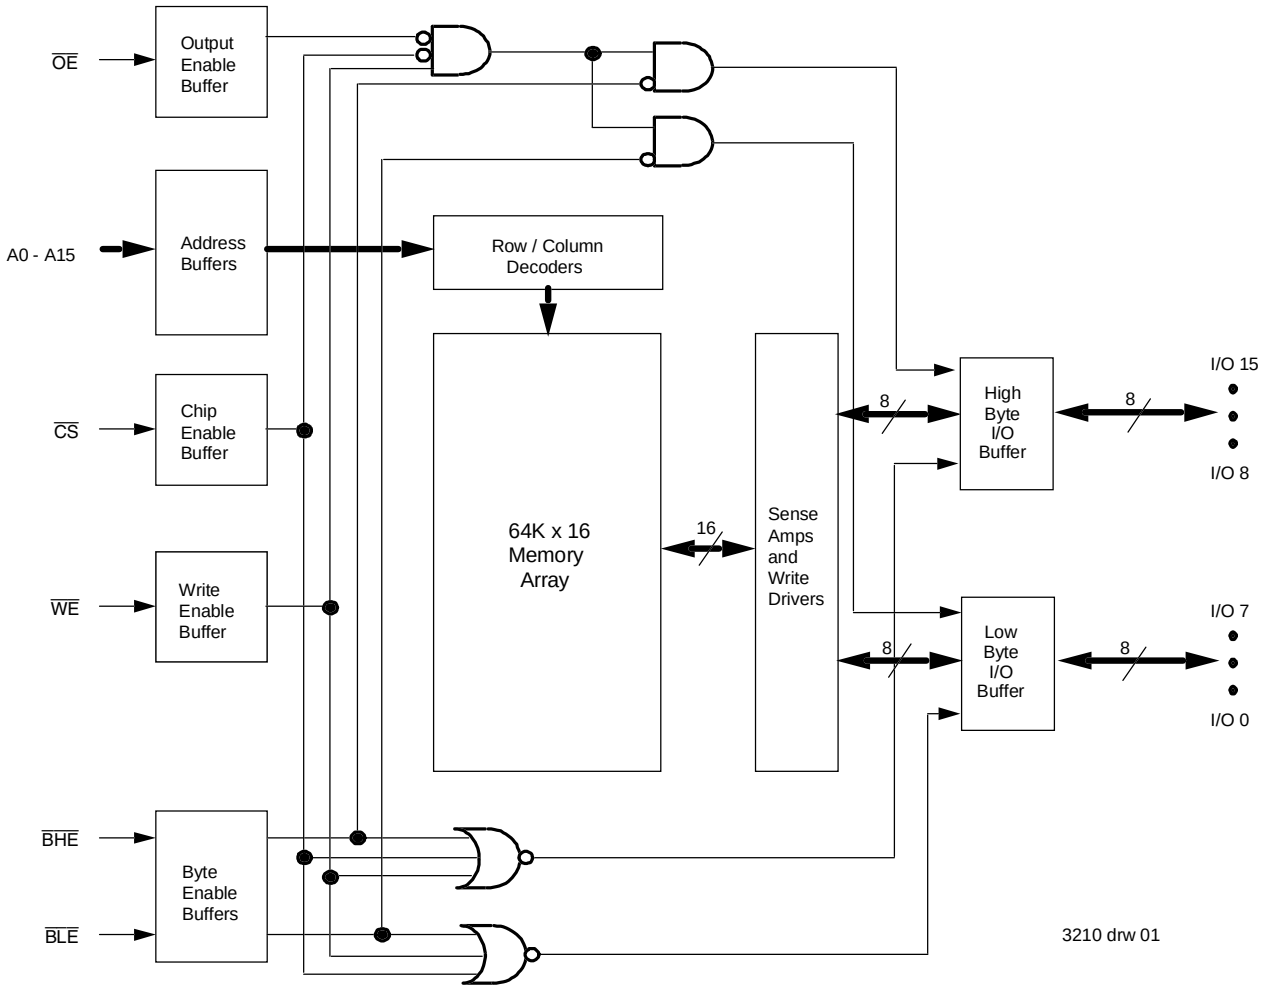

FEBRUARY 2001

©2000 Integrated Device Technology, Inc.

Pin Configurations

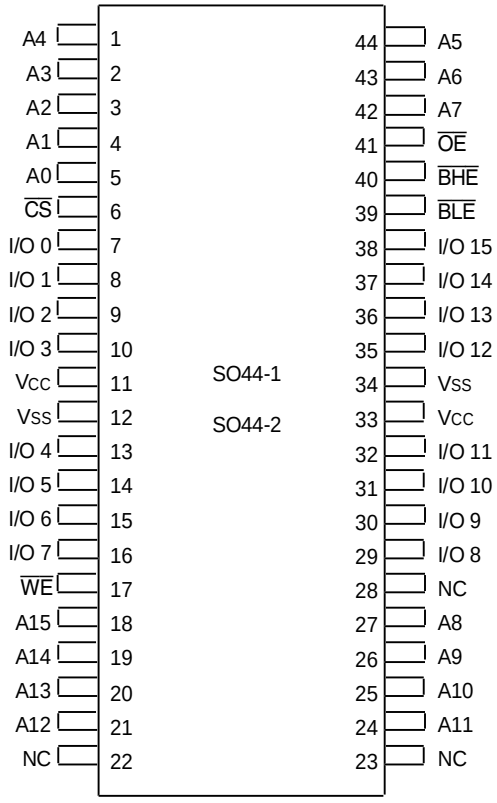

3210 drw 02

SOJ/TSOP
Top View

Pin Descriptions

A_0 - A_{15}	Address Inputs	Input
$\overline{CS}$	Chip Select	Input
$\overline{WE}$	Write Enable	Input
$\overline{OE}$	Output Enable	Input
$\overline{BHE}$	High Byte Enable	Input
$\overline{BLE}$	Low Byte Enable	Input
I/O_0 - I/O_{15}	Data Input/Output	I/O
V_{CC}	5.0V Power	Pwr
V_{SS}	Ground	Gnd

3210 tbl 01

Truth Table (1)

$\overline{CS}$	$\overline{OE}$	$\overline{WE}$	$\overline{BLE}$	$\overline{BHE}$	I/O_0 - I/O_7	I/O_8 - I/O_{15}	Function
H	X	X	X	X	High-Z	High-Z	Deselected - Standby
L	L	H	L	H	DATAOUT	High-Z	Low Byte Read
L	L	H	H	L	High-Z	DATAOUT	High Byte Read
L	L	H	L	L	DATAOUT	DATAOUT	Word Read
L	X	L	L	L	DATAIN	DATAIN	Word Write
L	X	L	L	H	DATAIN	High-Z	Low Byte Write
L	X	L	H	L	High-Z	DATAIN	High Byte Write
L	H	H	X	X	High-Z	High-Z	Outputs Disabled
L	X	X	H	H	High-Z	High-Z	Outputs Disabled

3210 tbl 02

NOTE:
1. H = V_{IH}, L = V_{IL}, X = Don't care.

Absolute Maximum Ratings(1)

Symbol	Rating	Value	Unit
V_{TERM}(2)	Terminal Voltage with Respect to GND	-0.5 to +7.0	V
T_A	Operating Temperature	0 to +70	°C
T_{BIAS}	Temperature Under Bias	-55 to +125	°C
T_{STG}	Storage Temperature	-55 to +125	°C
P_T	Power Dissipation	1.25	W
I_{OUT}	DC Output Current	50	mA

3210 tbl 03

NOTES:
1. Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
2. V_{TERM} must not exceed V_{CC} + 0.5V.

Recommended Operating Temperature and Supply Voltage

Grade	Temperature	GND	V_{CC}
Commercial	0°C to +70°C	0V	5.0V ± 10%
Industrial	–40°C to +85°C	0V	5.0V ± 10%

3210 tbl 04

Recommended DC Operating Conditions

Symbol	Parameter	Min.	Typ.	Max.	Unit
V_{CC}	Supply Voltage	4.5	5.0	5.5	V
GND	Ground	0	0	0	V
V_{IH}	Input High Voltage	2.2	—	V_{DD} +0.5	V
V_{IL}	Input Low Voltage	-0.5(1)	—	0.8	V

NOTE:
1. V_{IL} (min.) = –1.5V for pulse width less than tRC/2, once per cycle.

3210 tbl 05

Capacitance
(T_A = +25° C, f = 1.0MHz, SOJ Package)

Symbol	Parameter(1)	Conditions	Max.	Unit
C_{IN}	Input Capacitance	V_{IN} = 3dV	6	pF
$C_{I/O}$	I/O Capacitance	V_{OUT} = 3dV	7	pF

NOTE:
1. This parameter is guaranteed by device characterization, but not production tested.

3210 tbl 06

DC Electrical Characteristics
(Vcc = 5.0V ± 10%, Commercial and Industrial Temperature Range)

Symbol	Parameter	Test Conditions	Min.	Max.	Unit
$\|I_{LI}\|$	Input Leakage Current	V_{CC} = Max., V_{IN} = GND to V_{CC}	—	5	µA
$\|I_{LO}\|$	Output Leakage Current	V_{CC} = Max., $\overline{CS}$ = V_{IH}, V_{OUT} = GND to V_{CC}	—	5	µA
V_{OL}	Output Low Voltage	I_{OL} = 8mA, V_{CC} = Min.	—	0.4	V
V_{OH}	Output High Voltage	I_{OH} = -4mA, V_{CC} = Min.	2.4	—	V

3210 tbl 07

DC Electrical Characteristics(1)
(Vcc = 5.0V ± 10%, V_{LC} = 0.2V, V_{HC} = Vcc–0.2V)

Symbol	Parameter	71016S12		71016S15		71016S20		Unit
		Com'l.	Ind.	Com'l.	Ind.	Com'l.	Ind.	
I_{CC}	Dynamic Operating Current $\overline{CS}$ ≤ V_{IL}, Outputs Open, V_{CC} = Max., f = f_{MAX}(2)	210	210	180	180	170	170	mA
I_{SB}	Standby Power Supply Current (TTL Level) $\overline{CS}$ ≥ V_{IH}, Outputs Open, V_{CC} = Max., F = f_{MAX}(2)	60	60	50	50	45	45	mA
I_{SB1}	Standby Power Supply Current (CMOS Level) $\overline{CS}$ ≥ V_{HC}, Outputs Open, V_{CC} = Max., f = 0(2) V_{IN} ≤ V_{LC} or V_{IN} ≥ V_{HC}	10	10	10	10	10	10	mA

NOTES:
1. All values are maximum guaranteed values.
2. f_{MAX} = 1/tRC (all address inputs are cycling at f_{MAX}); f = 0 means no address input lines are changing .


3210 tbl 08

AC Test Conditions

Input Pulse Levels	GND to 3.0V
Input Rise/Fall Times	1.5ns
Input Timing Reference Levels	1.5V
Output Reference Levels	1.5V
AC Test Load	See Figure 1, 2 and 3

3210 tbl 09

AC Test Loads

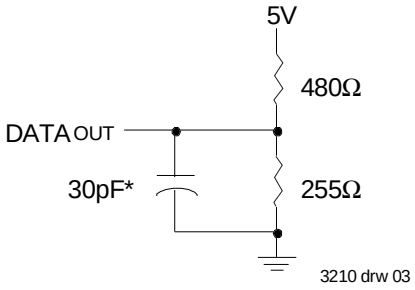

*Including jig and scope capacitance.

Figure 1. AC Test Load

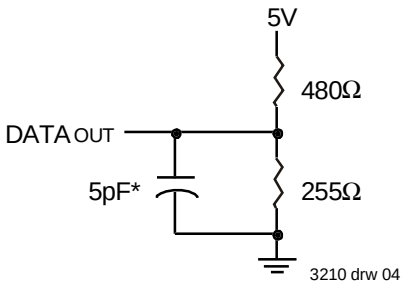


Figure 2. AC Test Load (for t_{CLZ}, t_{OLZ}, t_{CHZ}, t_{OHZ}, t_{OW}, and t_{WHZ})

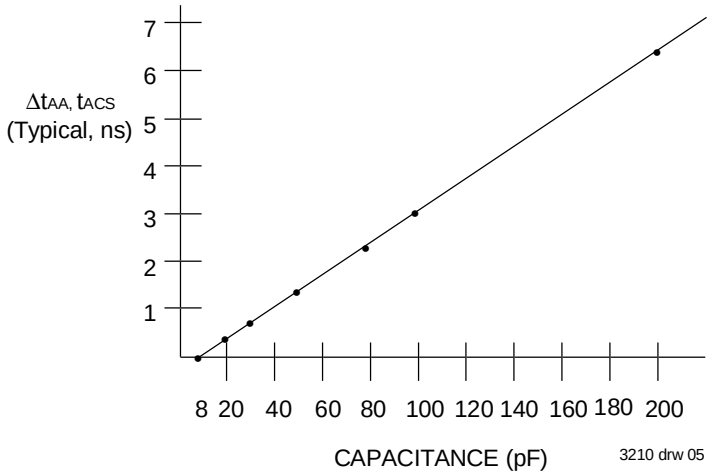


Figure 3. Output Capacitive Derating


AC Electrical Characteristics (Vcc = 5.0V ± 10%, Commercial and Industrial Range)

Symbol	Parameter	71016S12		71016S15		71016S20		Unit
		Min.	Max.	Min.	Max.	Min.	Max.	
READ CYCLE								
t_{RC}	Read Cycle Time	12	—	15	—	20	—	ns
t_{AA}	Address Access Time	—	12	—	15	—	20	ns
t_{ACS}	Chip Select Access Time	—	12	—	15	—	20	ns
t_{CLZ}(1)	Chip Select Low to Output in Low-Z	4	—	5	—	5	—	ns
t_{CHZ}(1)	Chip Select High to Output in High-Z	—	6	—	6	—	8	ns
t_{OE}	Output Enable Low to Output Valid	—	7	—	8	—	10	ns
t_{OLZ}(1)	Output Enable Low to Output in Low-Z	0	—	0	—	0	—	ns
t_{OHZ}(1)	Output Enable High to Output in High-Z	—	6	—	6	—	8	ns
t_{OH}	Output Hold from Address Change	4	—	4	—	5	—	ns
t_{BE}	Byte Enable Low to Output Valid	—	7	—	8	—	10	ns
t_{BLZ}(1)	Byte Enable Low to Output in Low-Z	0	—	0	—	0	—	ns
t_{BHZ}(1)	Byte Enable High to Output in High-Z	—	6	—	6	—	8	ns
WRITE CYCLE								
t_{WC}	Write Cycle Time	12	—	15	—	20	—	ns
t_{AW}	Address Valid to End of Write	9	—	10	—	12	—	ns
t_{CW}	Chip Select Low to End of Write	9	—	10	—	12	—	ns
t_{BW}	Byte Enable Low to End of Write	9	—	10	—	12	—	ns
t_{AS}	Address Set-up Time	0	—	0	—	0	—	ns
t_{WR}	Address Hold from End of Write	0	—	0	—	0	—	ns
t_{WP}	Write Pulse Width	9	—	10	—	12	—	ns
t_{DW}	Data Valid to End of Write	7	—	8	—	10	—	ns
t_{DH}	Data Hold Time	0	—	0	—	0	—	ns
t_{OW}(1)	Write Enable High to Output in Low-Z	1	—	1	—	1	—	ns
t_{WHZ}(1)	Write Enable Low to Output in High-Z	—	6	—	6	—	8	ns

3210 tbl 10

NOTE:
1. This parameter is guaranteed with the AC Load (Figure 2) by device characterization, but is not production tested.


Timing Waveform of Read Cycle No. 1(1,2,3)

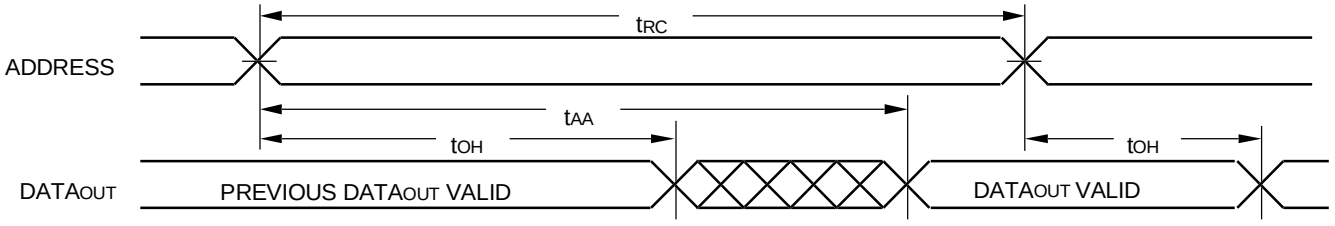

3210 drw 06

NOTES:
1. $\overline{WE}$ is HIGH for Read Cycle.
2. Device is continuously selected, $\overline{CS}$ is LOW.
3. $\overline{OE}$, $\overline{BHE}$, and $\overline{BLE}$ are LOW.


Timing Waveform of Read Cycle No. 2(1)

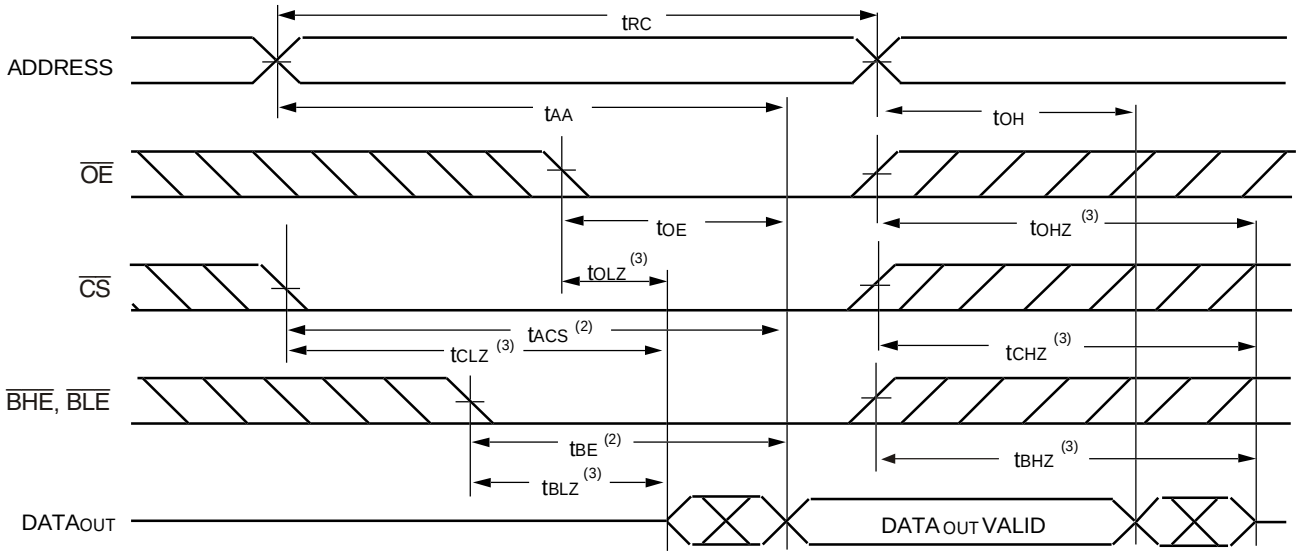

3210 drw 07

NOTES:
1. $\overline{WE}$ is HIGH for Read Cycle.
2. Address must be valid prior to or coincident with the later of $\overline{CS}$, $\overline{BHE}$, or $\overline{BLE}$ transition LOW; otherwise t_{AA} is the limiting parameter.
3. Transition is measured ±200mV from steady state.


Timing Waveform of Write Cycle No. 1 ($\overline{WE}$ Controlled Timing)(1,2,4)

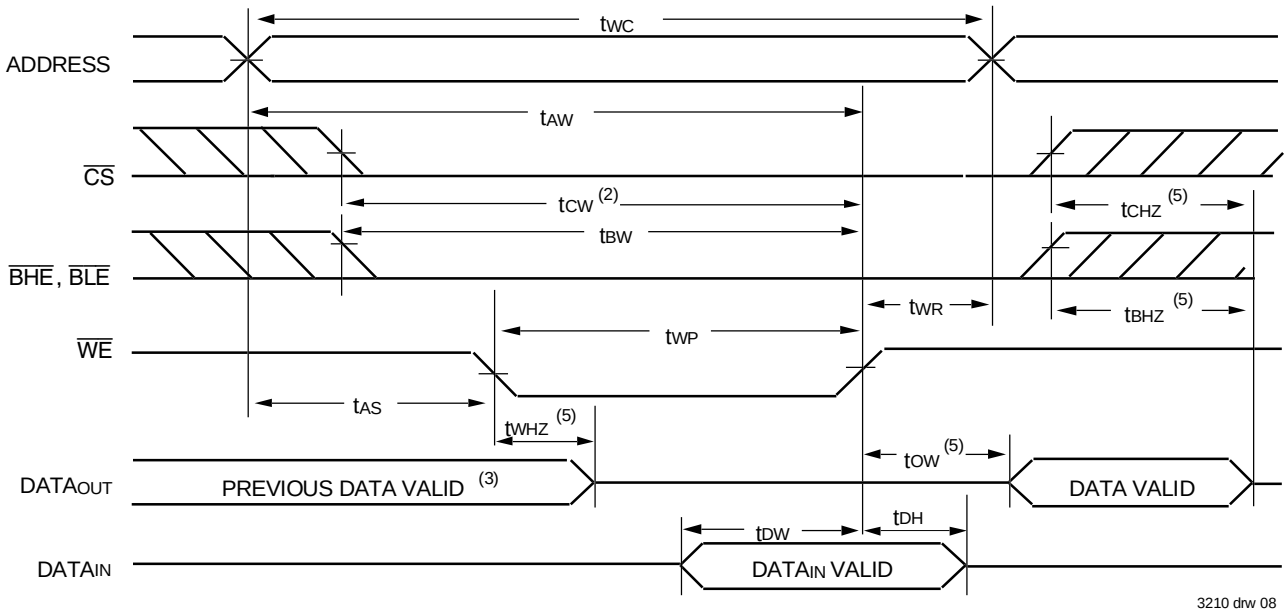


3210 drw 08

NOTES:
1. A write occurs during the overlap of a LOW $\overline{CS}$, LOW $\overline{BHE}$ or $\overline{BLE}$, and a LOW $\overline{WE}$.
2. $\overline{OE}$ is continuously HIGH. If during a $\overline{WE}$ controlled write cycle $\overline{OE}$ is LOW, t_{WP} must be greater than or equal to $t_{WHZ} + t_{DW}$ to allow the I/O drivers to turn off and data to be placed on the bus for the required t_{DW}. If $\overline{OE}$ is HIGH during a $\overline{WE}$ controlled write cycle, this requirement does not apply and the minimum write pulse is as short as the specified t_{WP}.
3. During this period, I/O pins are in the output state, and input signals must not be applied.
4. If the $\overline{CS}$ LOW or $\overline{BHE}$ and $\overline{BLE}$ LOW transition occurs simultaneously with or after the $\overline{WE}$ LOW transition, the outputs remain in a high-impedance state.
5. Transition is measured ±200mV from steady state.

Timing Waveform of Write Cycle No. 2 ($\overline{CS}$ Controlled Timing)[1,4]

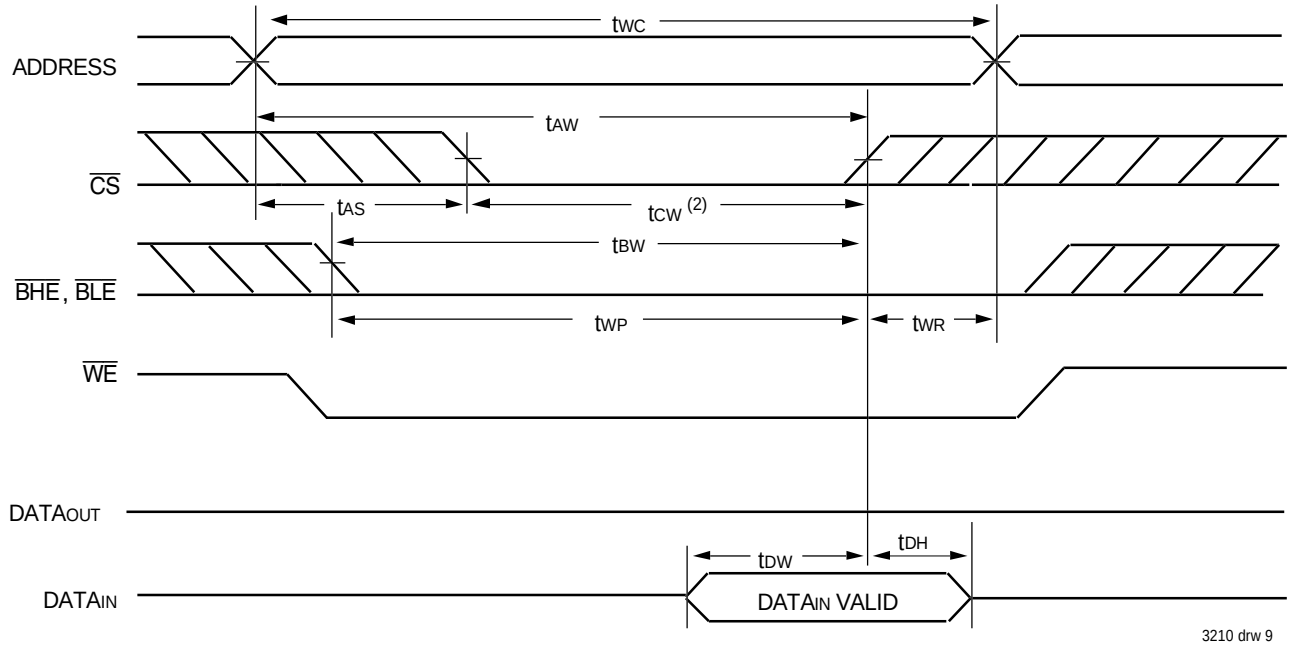


Timing Waveform of Write Cycle No. 3 ($\overline{BHE}$, $\overline{BLE}$ Controlled Timing)[1,4]

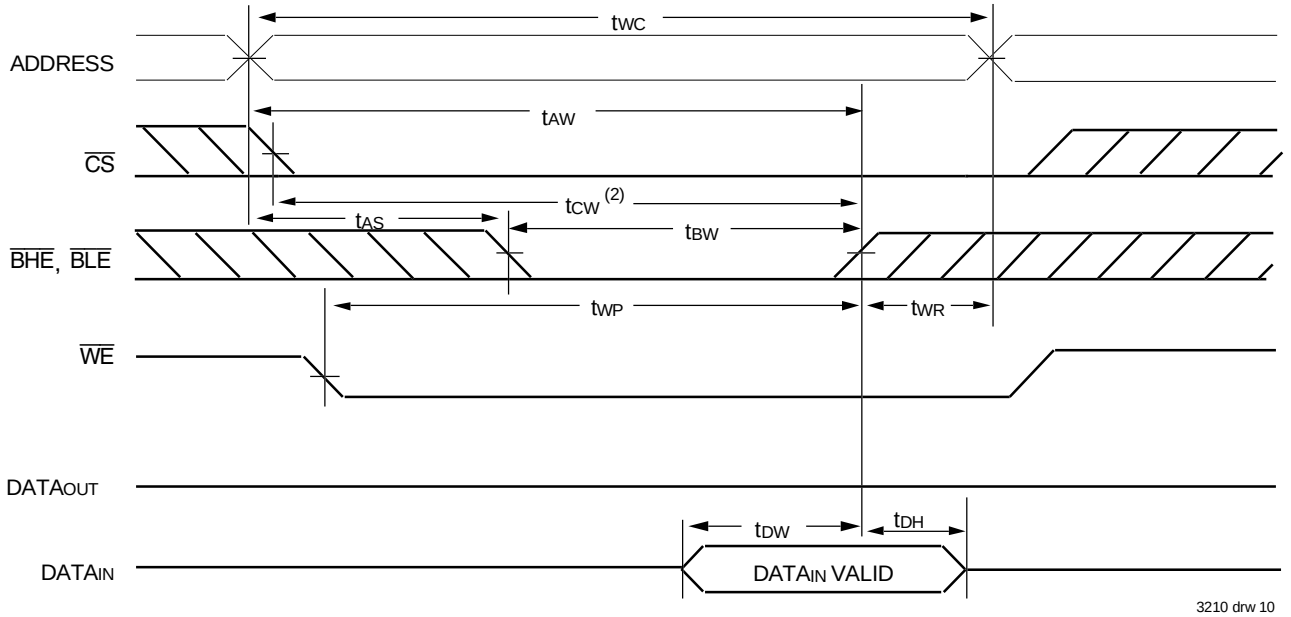

NOTES:

1. A write occurs during the overlap of a LOW $\overline{CS}$, LOW $\overline{BHE}$ or $\overline{BLE}$, and a LOW $\overline{WE}$.
2. $\overline{OE}$ is continuously HIGH. If during a $\overline{WE}$ controlled write cycle $\overline{OE}$ is LOW, t_{WP} must be greater than or equal to $t_{WHZ} + t_{DW}$ to allow the I/O drivers to turn off and data to be placed on the bus for the required t_{DW}. If $\overline{OE}$ is HIGH during a $\overline{WE}$ controlled write cycle, this requirement does not apply and the minimum write pulse is as short as the specified t_{WP}.
3. During this period, I/O pins are in the output state, and input signals must not be applied.
4. If the $\overline{CS}$ LOW or $\overline{BHE}$ and $\overline{BLE}$ LOW transition occurs simultaneously with or after the $\overline{WE}$ LOW transition, the outputs remain in a high-impedance state.
5. Transition is measured ±200mV from steady state.

Ordering Information

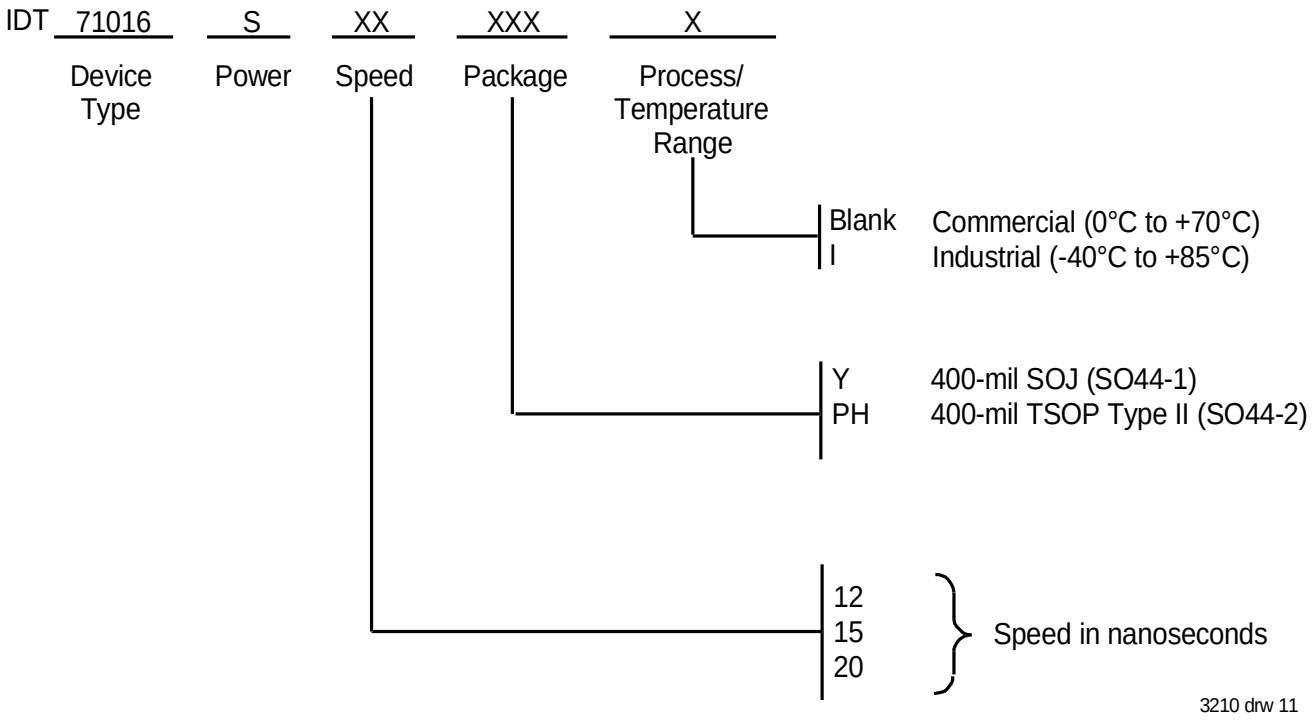

Datasheet Document History

7/30/99		Updated to new format
8/5/99	Pg. 3	Expressed commercial and industrial ranges on DC Electrical table
		Removed Icc, I_{SB}, and I_{SB1} values for S12 industrial speed
	Pg. 5	Expressed commercial and industrial ranges on AC Electrical table
		Changed footnote #2 to commercial temperature only
	Pg. 6	Revised footnotes on Write Cycle No. 1 diagram
	Pg. 7	Revised footnotes on Write Cycle No. 2 and No. 3 diagrams
	Pg. 8	Removed SCD 2752 footnote
		Added commercial only for 12ns speed
8/13/99	Pg. 9	Added Datasheet Document History
9/30/99	Pg. 3, 5, 8	Added 12ns industrial temperature speed grade offering
08/09/00		Not recommended for new designs
02/01/01		Removed "Not recommended for new designs"

CORPORATE HEADQUARTERS
2975 Stender Way
Santa Clara, CA 95054

for SALES:
800-345-7015 or 408-727-6116
fax: 408-492-8674
www.idt.com

for Tech Support:
sramhelp@idt.com
800-544-7726, x4033

The IDT logo is a registered trademark of Integrated Device Technology, Inc.