Fast EmCon Diode


Features

- 600 V diode technology
- Fast recovery
- Soft switching
- Low reverse recovery charge
- Low forward voltage
- Easy paralleling
- Pb-free lead plating; RoHS compliant
- Halogen-free according to IEC61249-2-21
- Qualified according to JEDEC for target applications

Product Summary

V_{RRM}	600	V
I_F	15	A
V_F	1.5	V
T_{jmax}	175	°C

PG-TO220-2



Type	Package	Ordering Code	Marking	Pin 1	PIN 2	PIN 3
IDP15E60	PG-TO220-2	-	D15E60	C	A	-

Maximum Ratings, at T_j = 25 °C, unless otherwise specified

Parameter	Symbol	Value	Unit
Repetitive peak reverse voltage	V_{RRM}	600	V
Continous forward current T_C=25°C T_C=90°C	I_F	 29.2 19.6	A
Surge non repetitive forward current T_C=25°C, t_p=10 ms, sine halfwave	I_{FSM}	60	
Maximum repetitive forward current T_C=25°C, t_p limited by T_{jmax}, D=0.5	I_{FRM}	45	
Power dissipation T_C=25°C T_C=90°C	P_{tot}	 83.3 47.2	W
Operating and storage temperature	T_j , T_{stg}	-55...+175	°C
Soldering temperature wavesoldering, 1.6mm (0.063 in.) from case for 10s	T_S	260	°C

Downloaded from Arrow.com.

Thermal Characteristics

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Characteristics					
Thermal resistance, junction - case	R_{thJC}	-	-	1.8	K/W
Thermal resistance, junction - ambient, leaded	R_{thJA}	-	-	62	
SMD version, device on PCB:	R_{thJA}				
@ min. footprint		-	-	62	
@ 6 cm^2 cooling area [1)]		-	35	-	

Electrical Characteristics, at T_j = 25 °C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Static Characteristics					
Reverse leakage current	I_R				µA
V_R=600V, T_j=25°C		-	-	50	
V_R=600V, T_j=150°C		-	-	1250	
Forward voltage drop	V_F				V
I_F=15A, T_j=25°C		-	1.5	2	
I_F=15A, T_j=150°C		-	1.5	-	

[3] J-STD20 and JESD22

[1] Device on 40mm*40mm*1.5mm epoxy PCB FR4 with 6cm² (one layer, 70 µm thick) copper area for drain connection. PCB is vertical without blown air.

Downloaded from Arrow.com.

Electrical Characteristics, at T_j = 25 °C, unless otherwise specified


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Dynamic Characteristics					
Reverse recovery time	t_{rr}				ns
V_R=400V, I_F=15A, di_F/dt=1000A/µs, T_j=25°C		-	87	-	
V_R=400V, I_F=15A, di_F/dt=1000A/µs, T_j=125°C		-	124	-	
V_R=400V, I_F=15A, di_F/dt=1000A/µs, T_j=150°C		-	131	-	
Peak reverse current	I_{rrm}				A
V_R=400V, I_F = 15A, di_F/dt=1000A/µs, T_j=25°C		-	13.7	-	
V_R=400V, I_F =15A, di_F/dt=1000A/µs, T_j=125°C		-	16.4	-	
V_R=400V, I_F =15A, di_F/dt=1000A/µs, T_j=150°C		-	19.3	-	
Reverse recovery charge	Q_{rr}				nC
V_R=400V, I_F=15A, di_F/dt=1000A/µs, T_j=25°C		-	595	-	
V_R=400V, I_F =15A, di_F/dt=1000A/µs, T_j=125°C		-	995	-	
V_R=400V, I_F =15A, di_F/dt=1000A/µs, T_j=150°C		-	1104	-	
Reverse recovery softness factor	S				
V_R=400V, I_F=15A, di_F/dt=1000A/µs, T_j=25°C		-	3.6	-	
V_R=400V, I_F=15A, di_F/dt=1000A/µs, T_j=125°C		-	4.3	-	
V_R=400V, I_F=15A, di_F/dt=1000A/µs, T_j=150°C		-	4.5	-	

Downloaded from Arrow.com.

1 Power dissipation

$P_{tot} = f(T_C)$


parameter: $T_j \leq 175$ °C

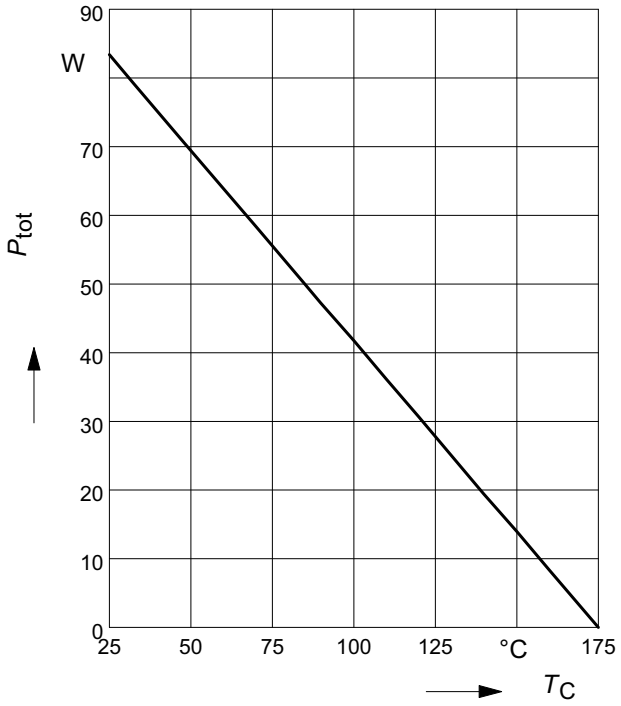

2 Diode forward current


$I_F = f(T_C)$

parameter: $T_j \leq 175$°C

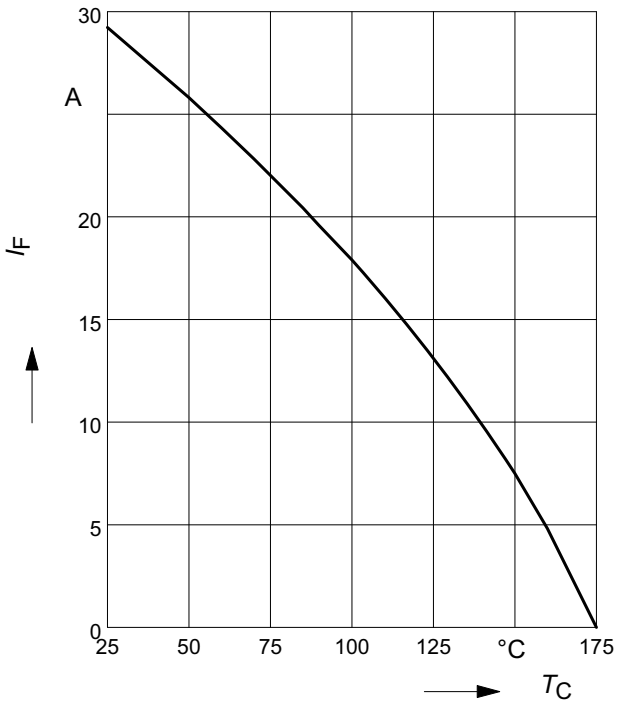


3 Typ. diode forward current

$I_F = f(V_F)$

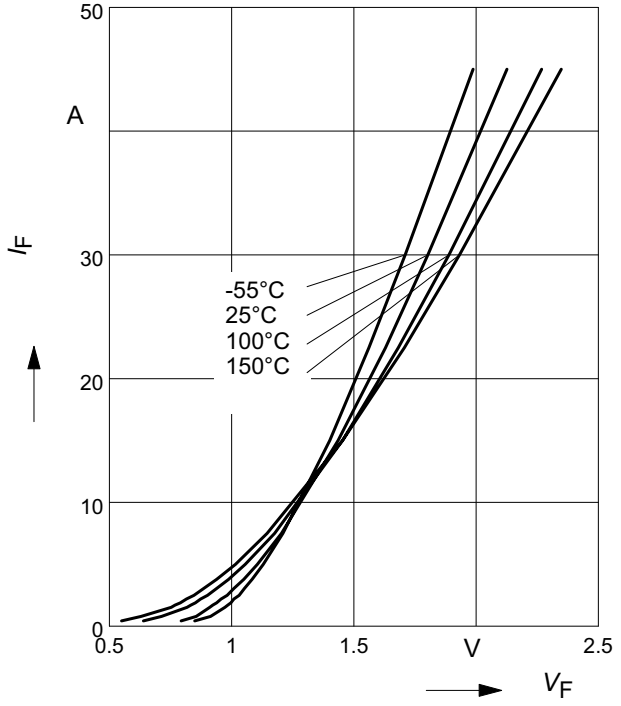

4 Typ. diode forward voltage

$V_F = f(T_j)$

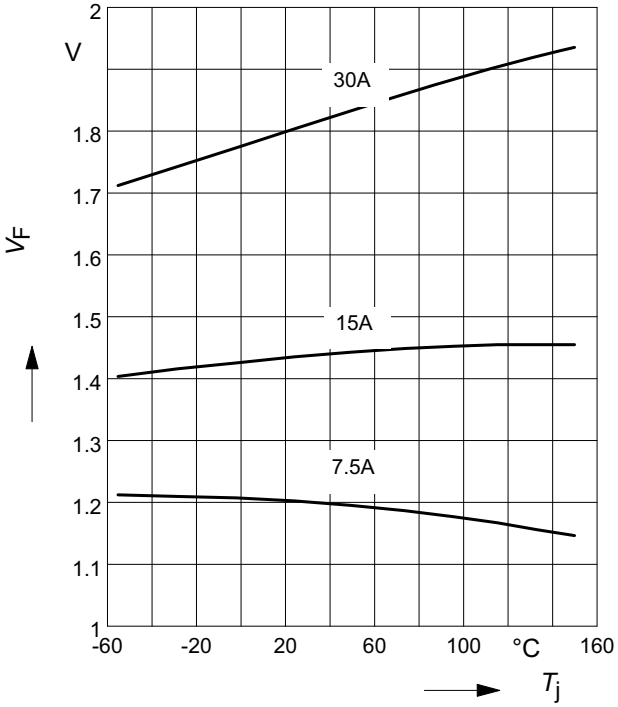


Downloaded from Arrow.com.

5 Typ. reverse recovery time

$t_{rr} = f\,(di_F/dt)$


parameter: V_R = 400V, T_j = 125°C

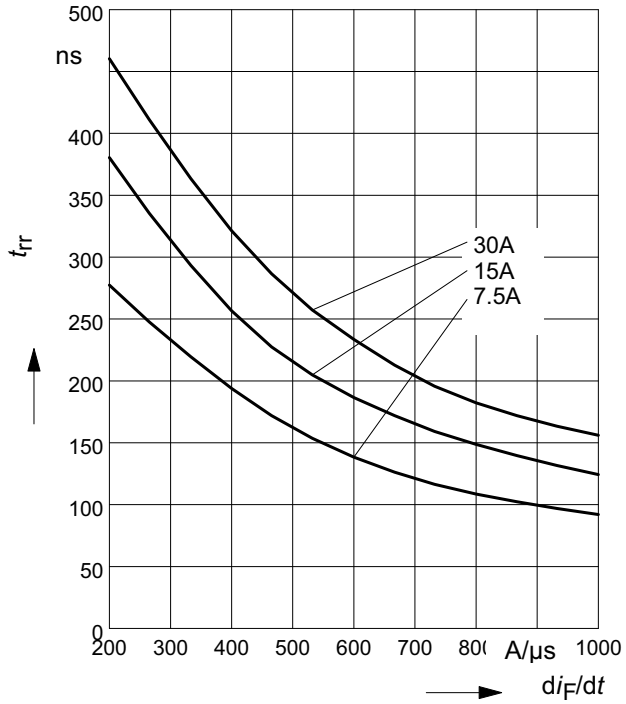

6 Typ. reverse recovery charge

$Q_{rr}=f(di_F/dt)$


parameter: V_R = 400V, T_j = 125 °C

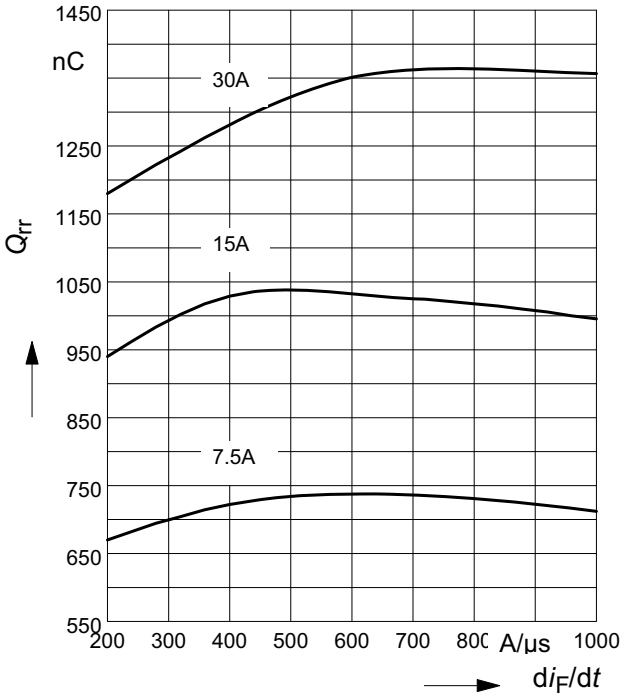

7 Typ. reverse recovery current

$I_{rr} = f\,(di_F/dt)$


parameter: V_R = 400V, T_j = 125°C

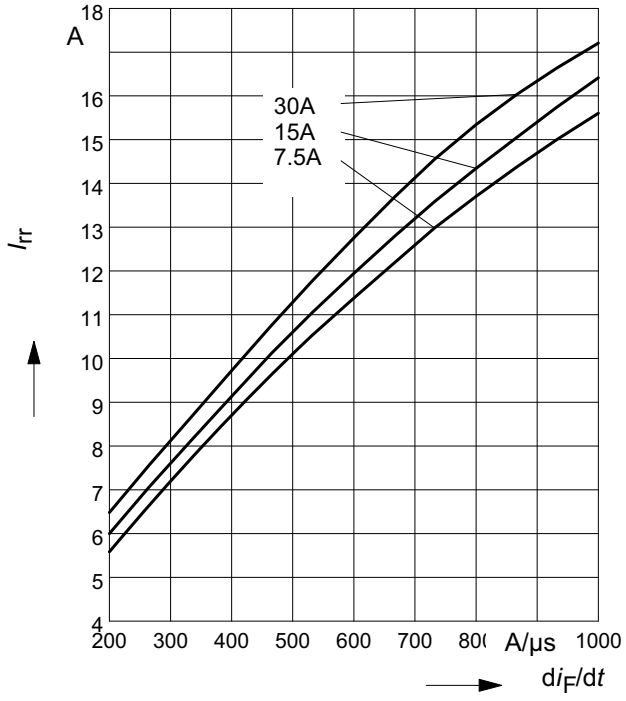

8 Typ. reverse recovery softness factor

S = f(di_F/dt)

parameter: V_R = 400V, T_j = 125°C

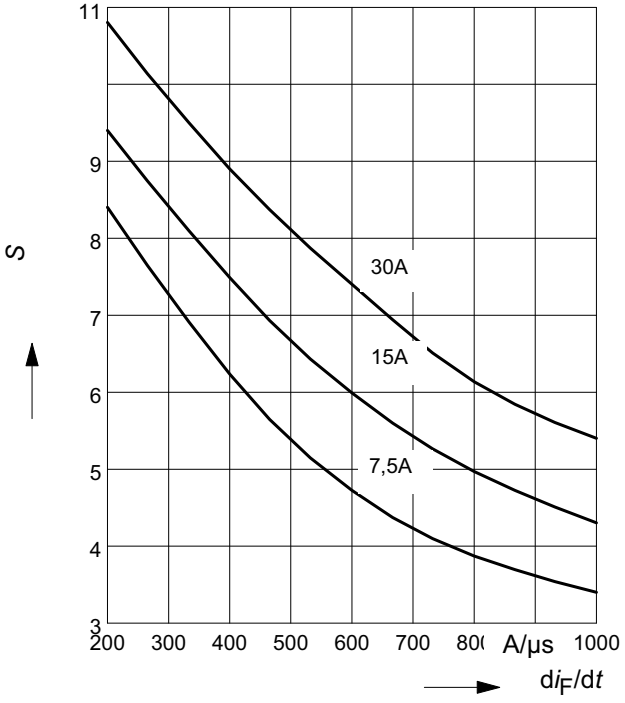


Downloaded from Arrow.com.


9 Max. transient thermal impedance

$Z_{thJC} = f(t_p)$

parameter : $D = t_p/T$

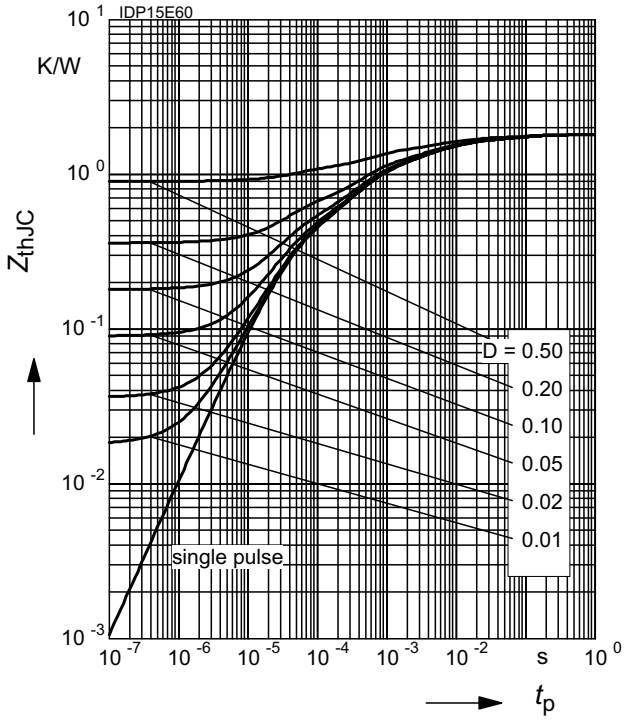

Downloaded from Arrow.com.

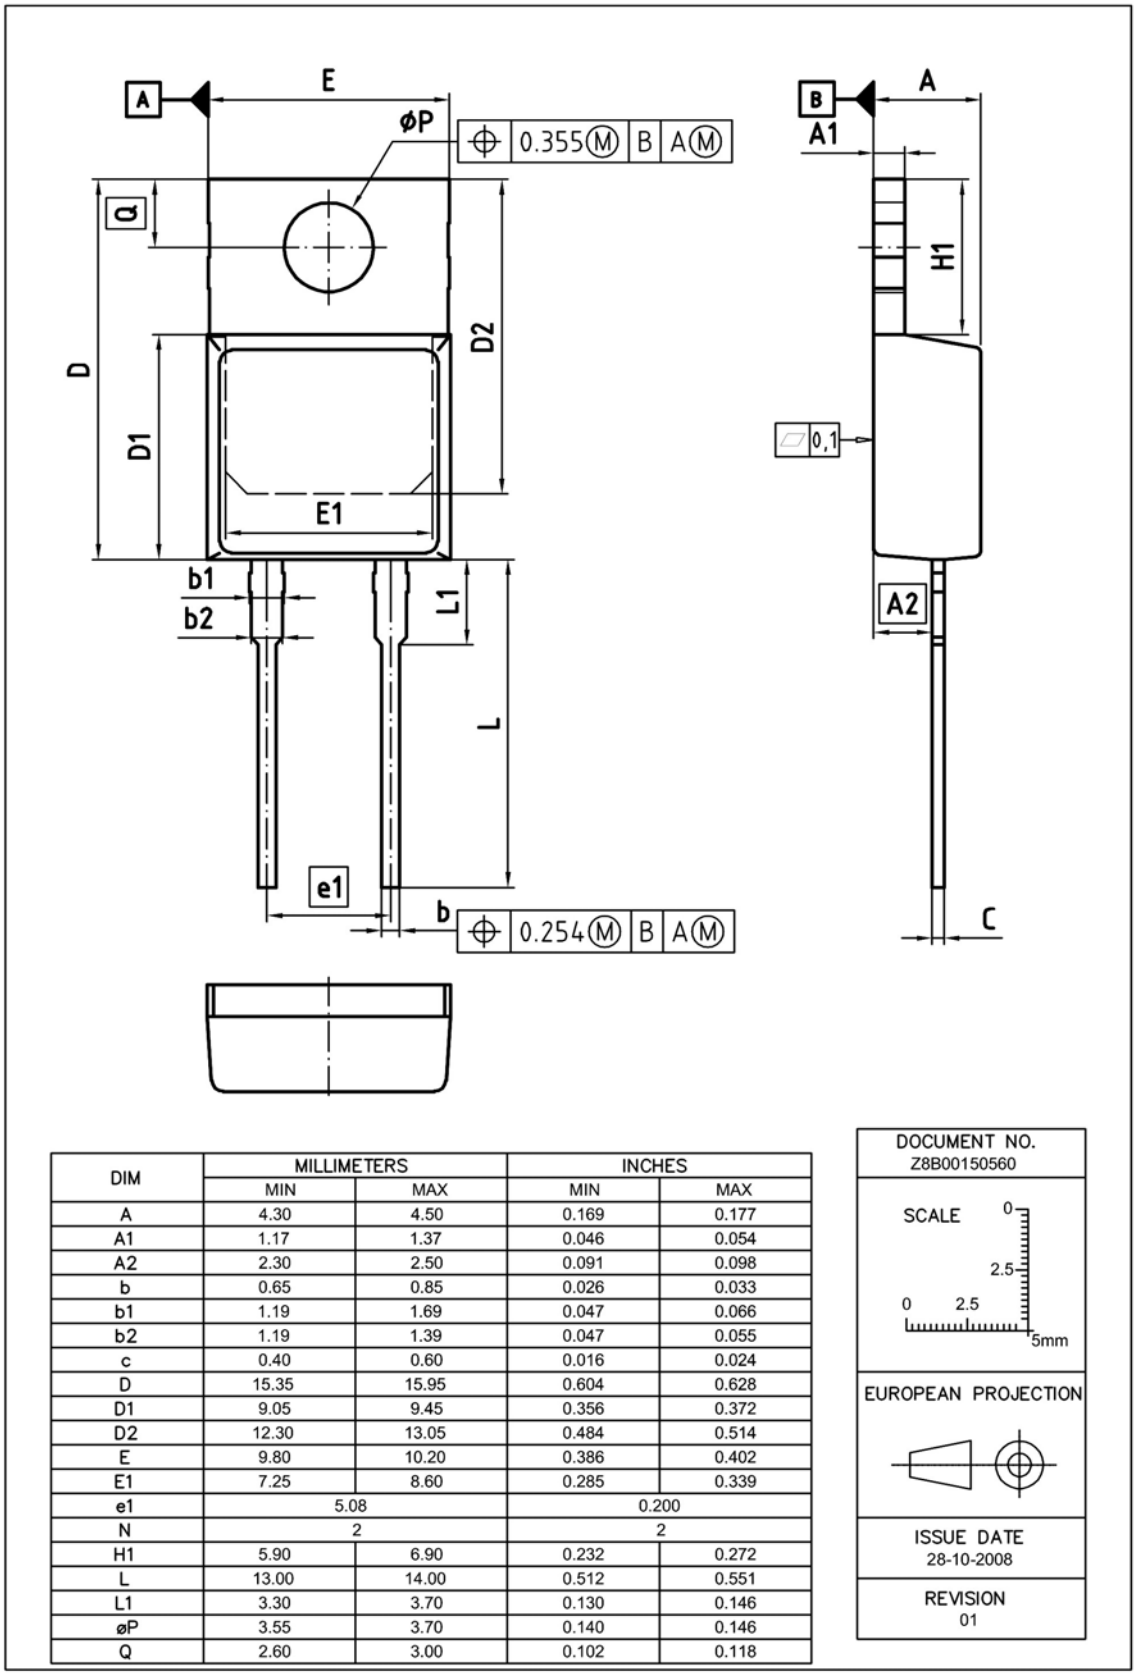

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.30	4.50	0.169	0.177
A1	1.17	1.37	0.046	0.054
A2	2.30	2.50	0.091	0.098
b	0.65	0.85	0.026	0.033
b1	1.19	1.69	0.047	0.066
b2	1.19	1.39	0.047	0.055
c	0.40	0.60	0.016	0.024
D	15.35	15.95	0.604	0.628
D1	9.05	9.45	0.356	0.372
D2	12.30	13.05	0.484	0.514
E	9.80	10.20	0.386	0.402
E1	7.25	8.60	0.285	0.339
e1	5.08		0.200	
N	2		2	
H1	5.90	6.90	0.232	0.272
L	13.00	14.00	0.512	0.551
L1	3.30	3.70	0.130	0.146
øP	3.55	3.70	0.140	0.146
Q	2.60	3.00	0.102	0.118

DOCUMENT NO.
Z8B00150560

SCALE 0 2.5 0 2.5 5mm

EUROPEAN PROJECTION

ISSUE DATE
28-10-2008

REVISION
01

Downloaded from Arrow.com.

Published by
Infineon Technologies AG
81726 Munich, Germany
81726 München, Germany
© 2009 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer
The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information
For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings
Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office. Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Downloaded from Arrow.com.