
| MOLD TYPE | MOLD NO. | ITEM |
|---|---|---|
| CONN1 OVERMOLD | SRO0847 | 5,6 |
| CONN1 OVERMOLD | SRO0848 | 4 |

| REV. | ECN NO. | DATE | BY | DESCRIPTION |
|---|---|---|---|---|
| 01 | | Sep/03/2020 | *Aine Li* | RELEASED |

RoHS

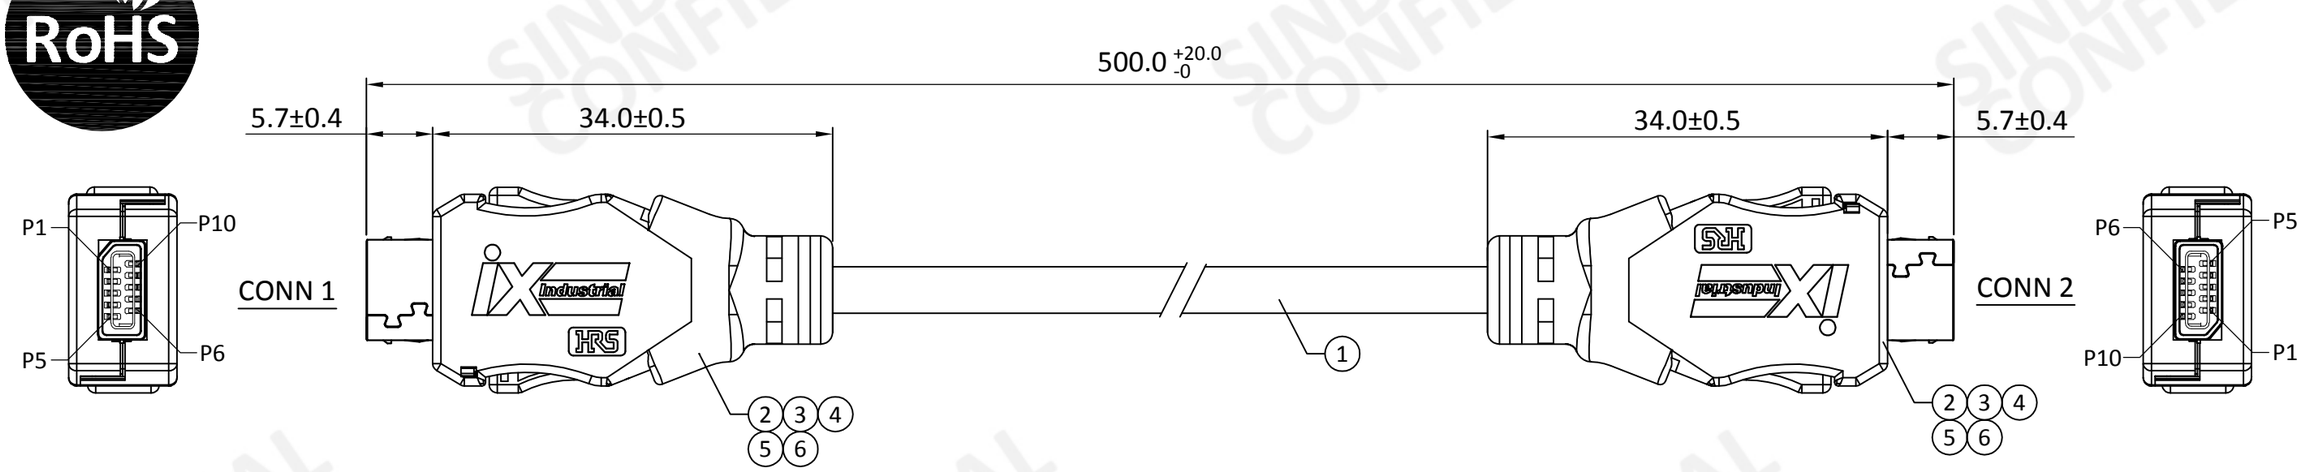


| WIRE RUN LIST | | | | |
|---|---|---|---|---|
| AWG | CONN 1 | | COLOR | CONN 2 |
| 26 | 1 | | BLUE | 1 |
| | 2 | | WHITE | 2 |
| | 4 | | ORANGE | 4 |
| | 5 | | WHITE | 5 |
| | 6 | | WHITE | 6 |
| | 7 | | GREEN | 7 |
| | 9 | | WHITE | 9 |
| | 10 | | BROWN | 10 |
| | SHELL | | SHIELD | SHELL |

NOTES:

1. TESTING SPEC.:
   COND. RESISTANCE: 3Ω MAX.
   INSUL. RESISTANCE: 10MΩ MIN.
   TESTING VOLTAGE: 200V DC
2. FOLLOW IPC620 CLASS II STANDARD TO ASSEMBLY AND INSPECTION.
3. RoHS COMPLIANCE.

| ITEM | QTY | DESCRIPTION |
|---|---|---|
| 6. | A/R | PLASTIC MASTERBATCH,BLACK,FOR TPU(A88270010001SD) |
| 5. | A/R | TPU,SHORE A 78,NATURAL,POLYETHER,UL94V-0,HF (A51100057001SD) |
| 4. | A/R | TPU,94A,BLACK,UL94V-0(A51100051001SD) |
| 3. | 2 | COPPER FOIL, (W)5*(L)30mm (A4060020200SD) |
| 2. | 2 | CONN., 10P, BLACK, HRS: IX40G-A-10S-CV(7.0) (A20151893001S) |
| 1. | A/R | CABLE, ULCM, #26*4P+AM+B, BLACK, OD=6.0, CAT 6A (JPCW2421) |

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION AND IS THE PROPERTY OF SINBON ELECTRONICS CO., LTD.
IT MAY NOT BE USED OR ITS CONTENTS COPIED OR DISCLOSED TO A THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT AND IS TO BE RETURNED PROMPTLY UPON REQUEST BY SINBON ELECTRONICS CO., LTD.

CUSTOMER : DigiKey

CUSTOMER P/N : N/A | REV. N/A

UNLESS OTHERWISE SPECIFIED TOLERANCE :
1 ~ 10 : ±1
11 ~ 30 : ±2
31 ~ 50 : ±3
51 ~ 200 : ±5
201 ~ 400 : ±7
> 401 : ±10
ANGLES : ±1°

DRA. Sep/03/2020 *Aine Li*
CHK. Sep/03/2020 *Kevin Qiu*
APR. Sep/03/2020 *Kevin Qiu*

SINBON Electronics Co., Ltd.

DESCRIPTION : IX(M) to IX(M), Cat6A, 500mm

PART NUMBER : IX40AM-IX40AM-CAT6A05 | REV. 01

SIZE A3 | UNIT mm | SCALE NONE | SHEET 1 of 1