
MOLD TYPE	MOLD NO.	ITEM
CONN1 OVERMOLD	SRO0847	5,6
CONN1 OVERMOLD	SRO0848	4

REV.	ECN NO.	DATE	BY	DESCRIPTION
01		Sep/03/2020	*Aine Li*	RELEASED

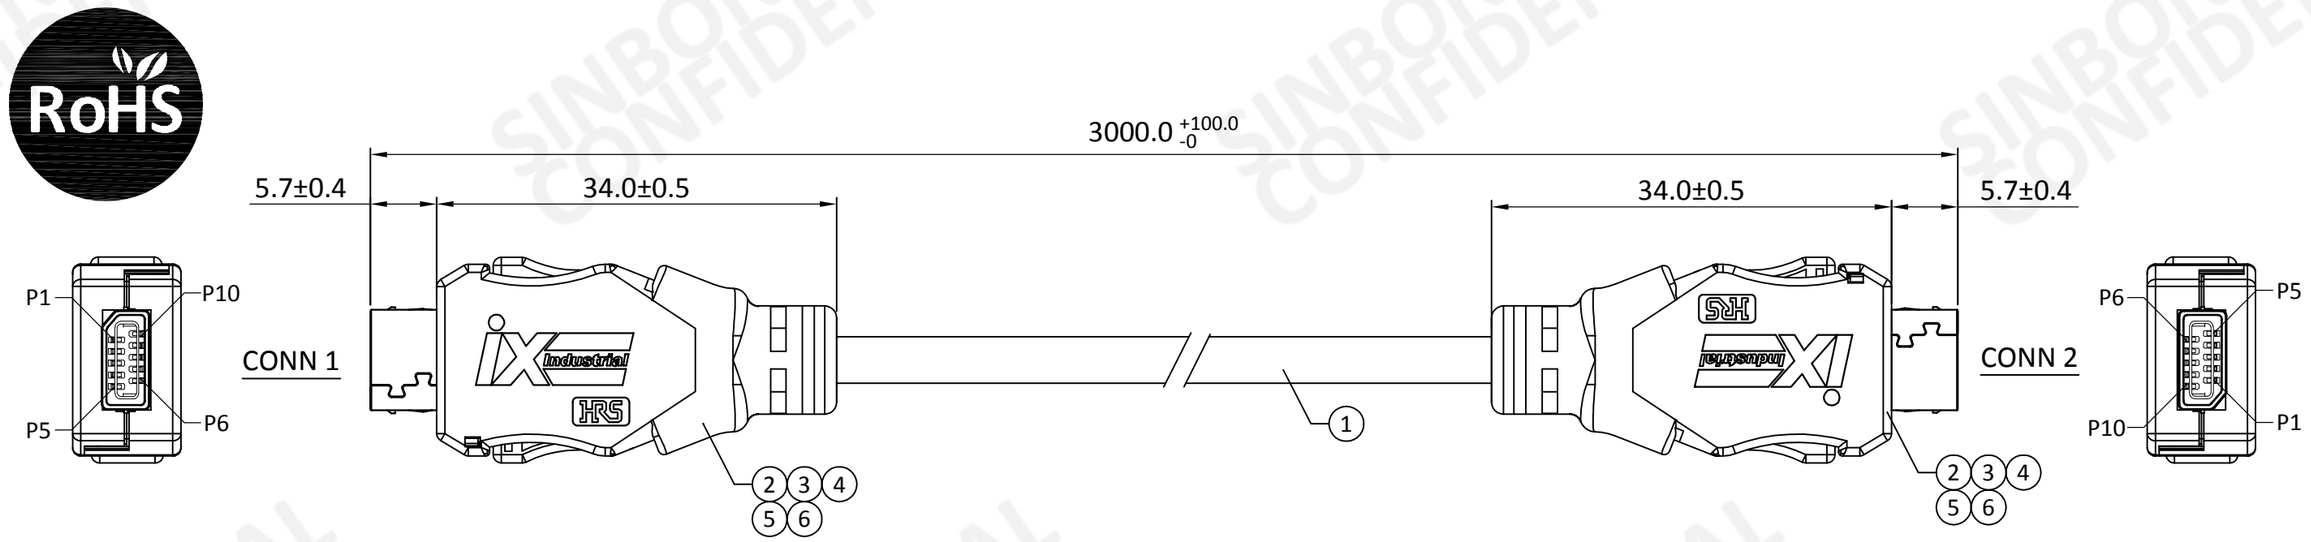

WIRE RUN LIST				
AWG	CONN 1		COLOR	CONN 2
26	1		BLUE	1
	2		WHITE	2
	4		ORANGE	4
	5		WHITE	5
	6		WHITE	6
	7		GREEN	7
	9		WHITE	9
	10		BROWN	10
	SHELL		SHIELD	SHELL

ITEM	QTY	DESCRIPTION
6.	A/R	PLASTIC MASTERBATCH,BLACK,FOR TPU(A88270010001SD)
5.	A/R	TPU,SHORE A 78,NATURAL,POLYETHER,UL94V-0,HF (A51100057001SD)
4.	A/R	TPU,94A,BLACK,UL94V-0(A51100051001SD)
3.	2	COPPER FOIL, (W)5*(L)30mm (A4060020200SD)
2.	2	CONN., 10P, BLACK, HRS: IX40G-A-10S-CV(7.0) (A201518930015)
1.	A/R	CABLE, ULCM, #26*4P+AM+B, BLACK, OD=6.0, CAT 6A (JPCW2421)

NOTES:

1. TESTING SPEC.:
   COND. RESISTANCE: 3Ω MAX.
   INSUL. RESISTANCE: 10MΩ MIN.
   TESTING VOLTAGE: 200V DC
2. FOLLOW IPC620 CLASS II STANDARD TO ASSEMBLY AND INSPECTION.
3. RoHS COMPLIANCE.

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION AND IS THE PROPERTY OF SINBON ELECTRONICS CO., LTD.
IT MAY NOT BE USED OR ITS CONTENTS COPIED OR DISCLOSED TO A THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT
AND IS TO BE RETURNED PROMPTLY UPON REQUEST BY SINBON ELECTRONICS CO., LTD.

CUSTOMER : DigiKey

CUSTOMER P/N : N/A | REV. N/A

SINBON Electronics Co., Ltd.

DESCRIPTION : IX(M) to IX(M), Cat6A, 3M

UNLESS OTHERWISE SPECIFIED TOLERANCE :
1 ~ 10 : ± 1
11 ~ 30 : ± 2
31 ~ 50 : ± 3
51 ~ 200 : ± 5
201 ~ 400 : ± 7
> 401 : ± 10
ANGLES : ± 1°

DRA. Sep/03/2020 *Aine Li*
CHK. Sep/03/2020 *Kevin Qiu*
APR. Sep/03/2020 *Kevin Qiu*

PART NUMBER : IX40AM-IX40AM-CAT6A30 | REV. 01

SIZE	UNIT	SCALE	SHEET
A3	mm	NONE	1 of 1

GDP-D-071 A