
GOLD SWITCHED JACK SOCKETS


6.35mm JACK SOCKET



CL11607

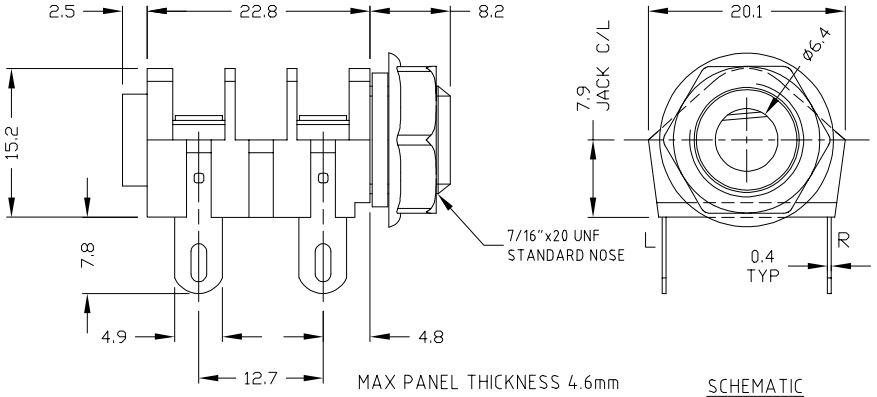


SCHEMATIC




MONO (BNB) JACK
SWITCH CONTACTS OPEN WHEN PLUG IS INSERTED + CLOSE WHEN PLUG IS WITHDRAWN.



CL12207

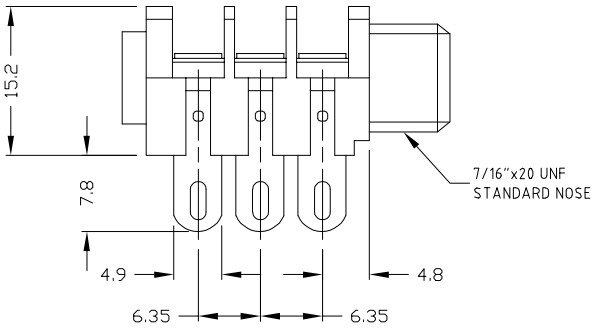





STEREO (BBB) JACK
SWITCH CONTACTS OPEN WHEN PLUG IS INSERTED + CLOSE WHEN PLUG IS WITHDRAWN.



CL12327

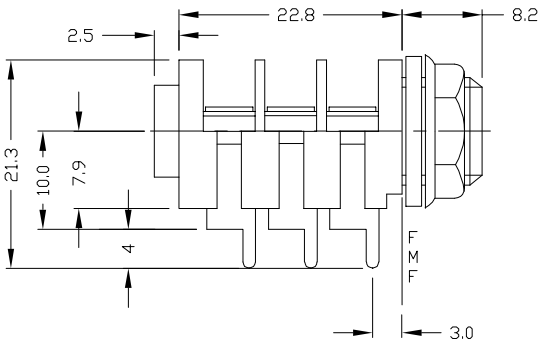

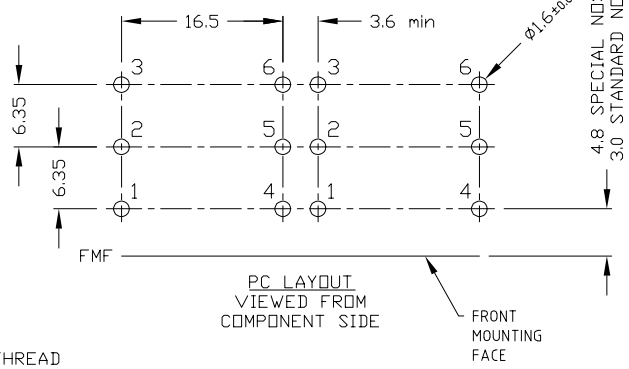


PC LAYOUT
VIEWED FROM
COMPONENT SIDE

FRONT
MOUNTING
FACE



CL12345

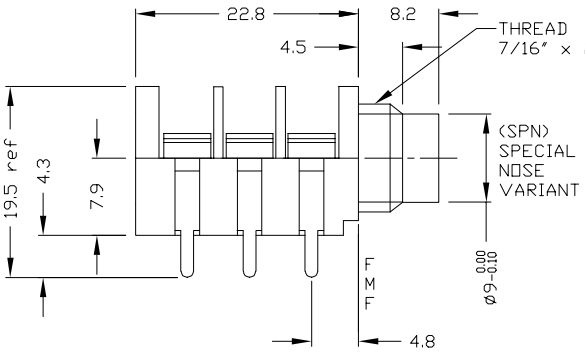

SPECIFICATION

Dielectric Withstand voltage:	2000V DC Min.
Maximum Current:	5A
Temperature Rating:	-10° C to +70° C
Life (Minimum):	10,000+ Operations
Nominal Contact Resistance:	<50mΩ

DESCRIPTION


CL11607 - Jack Socket Mono S2/BNB Solder Tag
CL12207 - Jack Socket Stereo S2/BBB Solder Tag
CL12327 - Jack Socket Stereo S2/BBB PC Tag Type A.
CL12345 - Jack Socket Stereo S2/BBB Special Nose PC Tag Type C. No nut or washers.

GOLD SWITCHED JACK SOCKETS

6.35mm JACK SOCKET




CL1227G

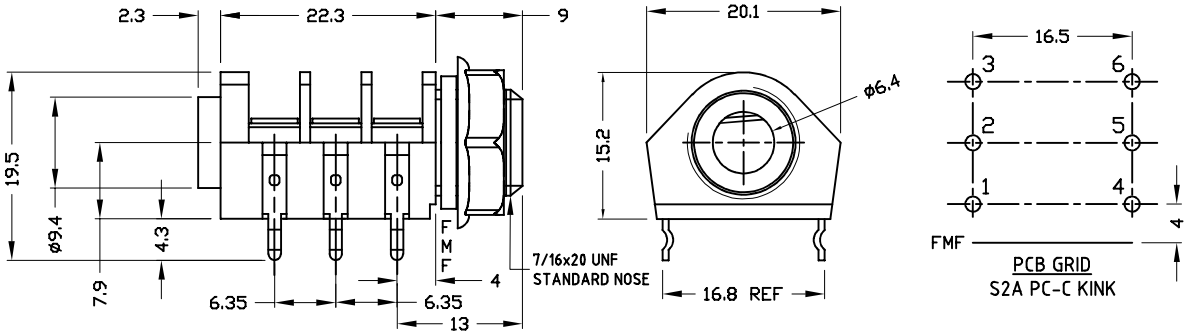

6.35mm JACK SOCKET




CL13345

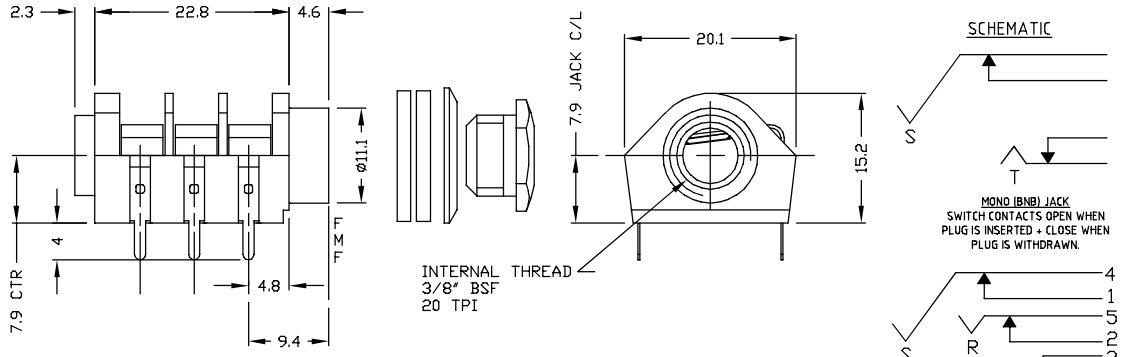




CL1308G

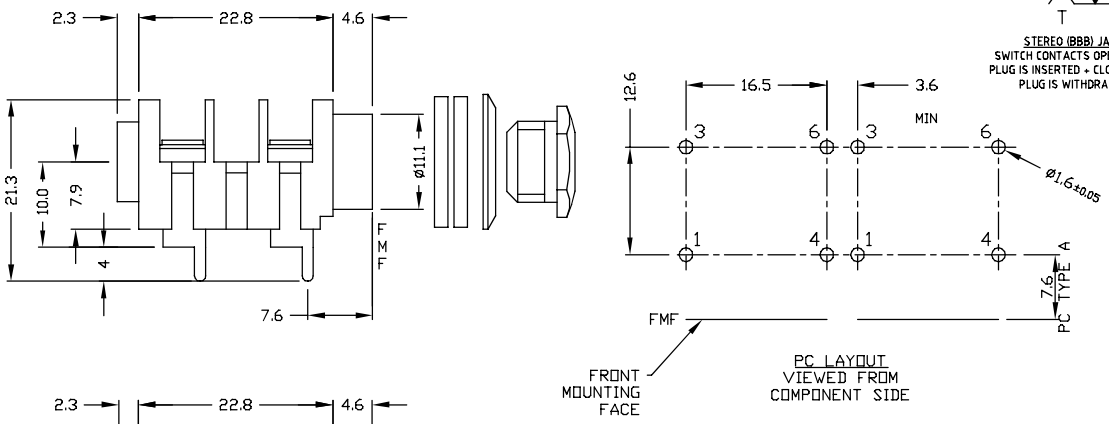



CL13106G

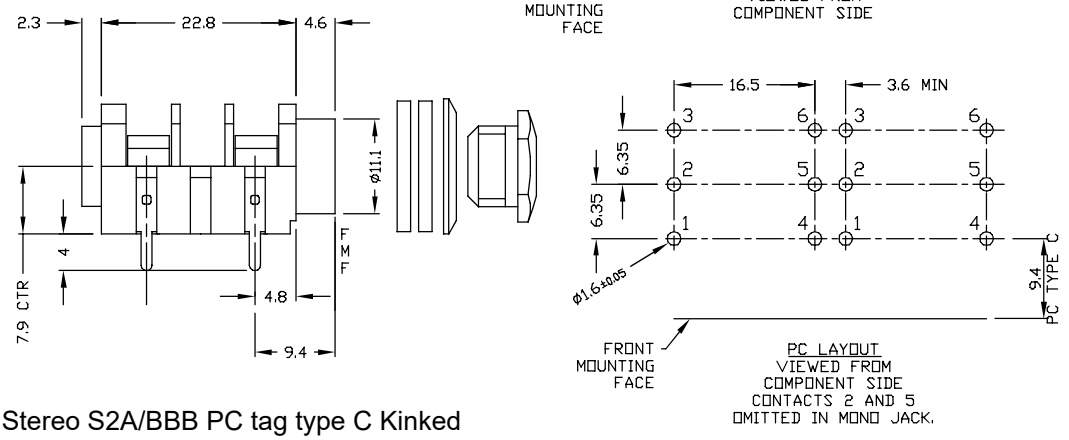

DESCRIPTION

CL1227G - Jack Socket Stereo S2A/BBB PC tag type C Kinked
CL13345 - Jack Socket Stereo S4/BBB PC tag type C
CL1308G - Jack Socket Mono S4/BNB PC tag type A
CL13106G - Jack Socket Mono S4/BNB PC tag type C

CLIFF

GOLD SWITCHED JACK SOCKETS


6.35mm JACK SOCKET





CL1299A



CL1323A

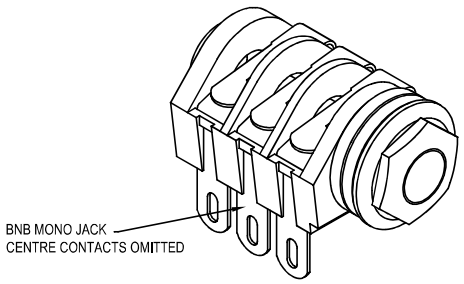



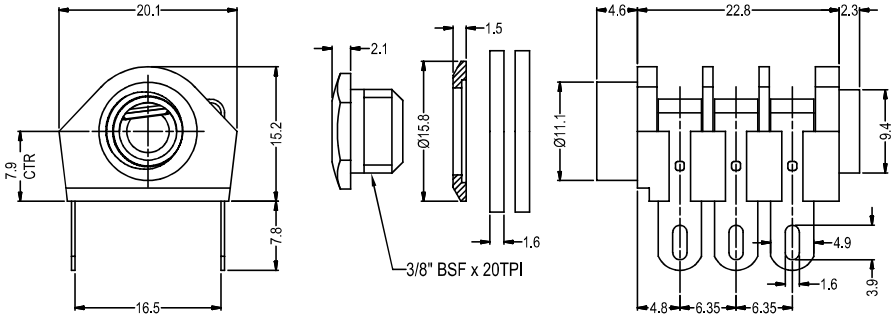

DESCRIPTION

CL1299A - Jack Socket Mono S4/BNB Solder Tag. Supplied assembled

CL1323A - Jack Socket Stereo S4/BBB Solder Tag. Supplied assembled

---


3.5mm JACK SOCKET



CL13845G




CL13843G

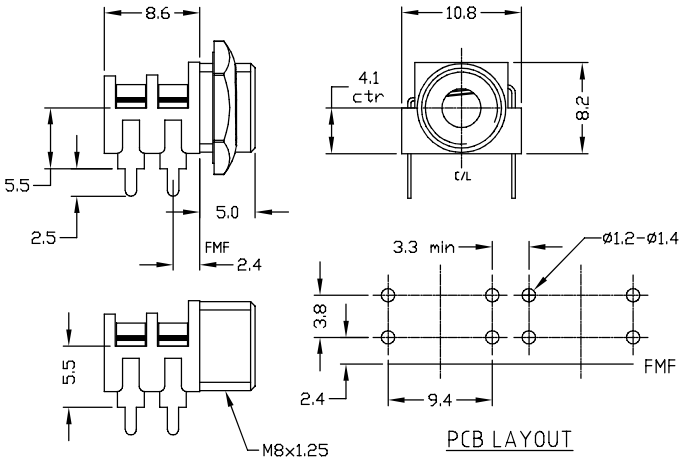




FCR1295G

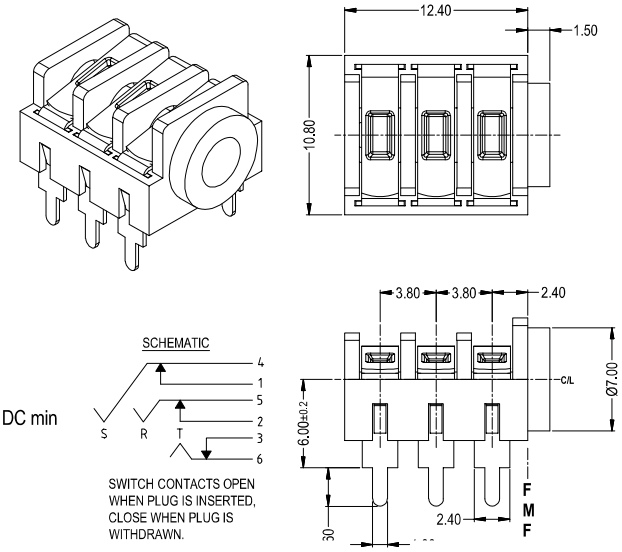

SPECIFICATIONS

- DIELECTRIC WITHSTAND VOLTAGE: 2000V DC min
- MAXIMUM CURRENT: 5A
- TEMPERATURE RANGE: -10°C TO +70°C
- LIFE (MINIMUM): 5,000+ OPERATIONS
- CONTACT RESISTANCE <50mΩ



DESCRIPTION

CL13845G - 3.5mm Jack Socket S6G/BB with nut

CL13843G - 3.5mm Jack Socket S6G/BB without nut

CL1295G - 3.5mm Stereo Jack Socket S9/BBB with 6mm PCB legs

GOLD SWITCHED JACK SOCKETS

JACK SOCKET ACCESSORIES



FCR14422 - EMI / RFI SCREEN FOR 6.35mm JACK SOCKETS



CL14218 - BLACK COMBINED NUT/BEZEL FOR S4 TYPE JACK SOCKET




CL14218GY - GREY COMBINED NUT/BEZEL FOR S4 TYPE JACK SOCKET



CL14218R - RED COMBINED NUT/BEZEL FOR S4 TYPE JACK SOCKET



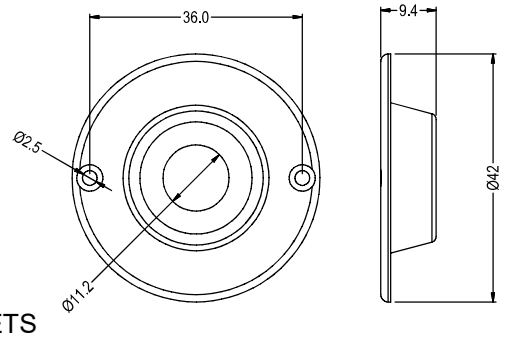

CL1396 - RECESS PLATE TO ALLOW FLUSH MOUNTING OF 6.35mm JACK SOCKETS

© CLIFF 08/2023 ISS.7

For further information, contact sales@cliffuk.co.uk

Cliff Electronic Components Limited,
76 Holmethorpe Avenue, Holmethorpe Ind. Estate,
Redhill, Surrey RH1 2PF U.K.
Tel: +44 (0)1737 771375 Fax: +44 (0)1737 766012

www.cliffuk.co.uk

✓RoHS