



SIGN	DATE	DESCRIPTION	APPROVER
1	04/06`12	Add is cULus	Chen Bo
2	04/06`12	The Dimension C & D & E are added	Chen Bo
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

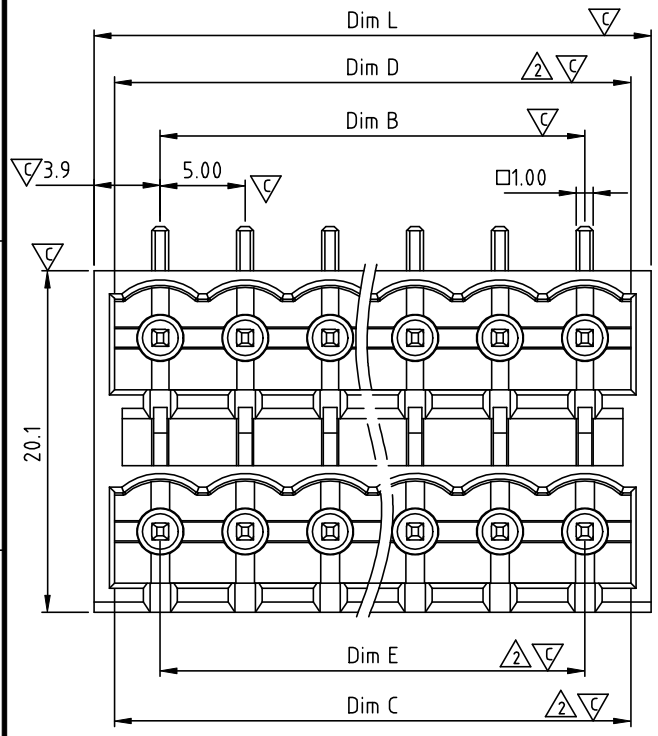

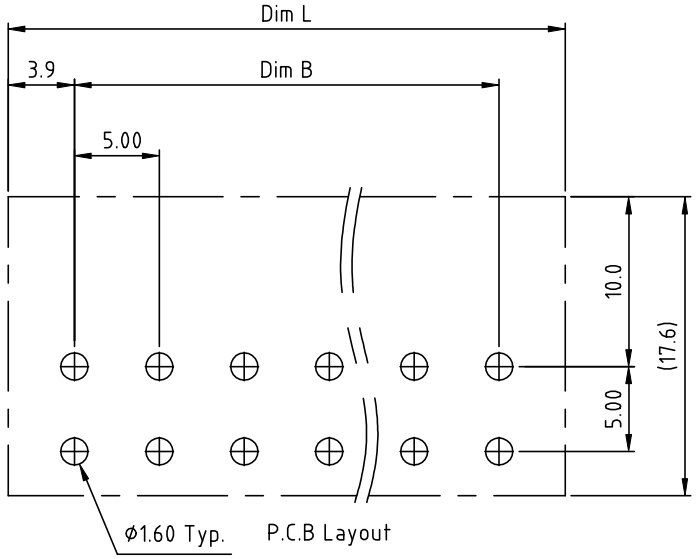

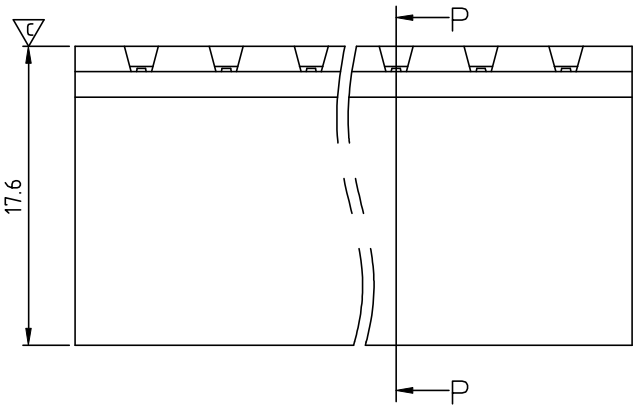

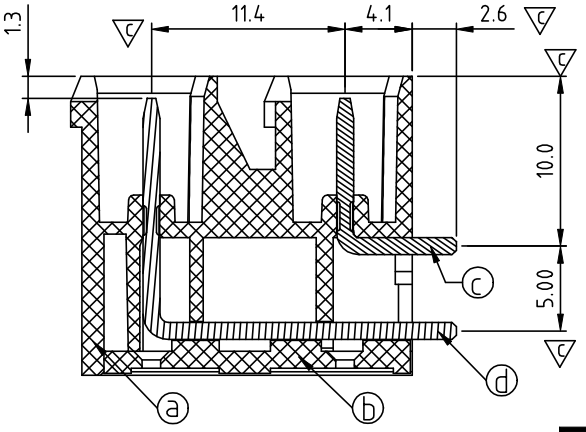

SECTION
P-P

Material:
- Item a Terminal(housing): Thermoplastic (UL94V-0)
- Item b Terminal(cover): Thermoplastic (UL94V-0)
- Item c Male contact pin of short: Copper Tin plated
- Item d Male contact pin of long: Copper Tin plated

Electrical:	cULus
Voltage rating:	300V
Current rating:	12A
Withstanding Voltage:	1.6KV
Operating temperature:	-40°C to +115°C
Soldering temperature:	250°C±10°C/5 Sec
Safety Approval:	c UL us
1 Critical dimension:	C

KE xx 7 1 x 3 xxxx G

No. OF POLES
04: 2×2 POLES
06: 2×3 POLES
:
:
48: 2×24 POLES

COLOR
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)
9 White(RAL1102)
C Green(RAL6018/U)

RoHS compliant
(lead<4%)
In copper Alloy

0000: "@" Logo (Standard)
000A: "ANYTEK" Mark

Any special item by customer requst. please contact sales department.

Poles	Dim L	Dim B	Dim C	Dim D	Dim E
2×2P-2×6P	±0.15	±0.15	+0.05 −0.05	+0.05 −0.05	±0.15
2×7P-2×12P	±0.25	±0.25	+0.10 −0.05	+0.10 −0.05	±0.25
2×13P-2×18P	±0.35	±0.35	+0.20 −0.05	+0.20 −0.05	±0.35
2×19P-2×24P	±0.40	±0.40	+0.25 −0.10	+0.25 −0.10	±0.40

N = Number of poles
Dim L=N×5.0+2.8
Dim B=(N-1)x5.0
Dim C=(N-1)x5.0+5.4
Dim D=(N-1)x5.0+5.4
Dim E=(N-1)x5.0

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	KE 5.0mm Close Series 2×2P-2×24P (Right angle) (DIP type)				
PART NO.	KExx71x3xxxxG			DWG NO.	8KE0101
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Chen Bo 04/06`12	Chen Bo 04/06`12	UNIT: mm	
				SCALE: NONE	
				SHEET: 01/01	REV.: C

Tolerance	
X.	±0.50
X.X	±0.30
X.XX	±0.10
X°	±1°