


P.C. LAYOUT

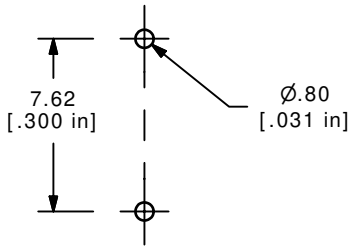


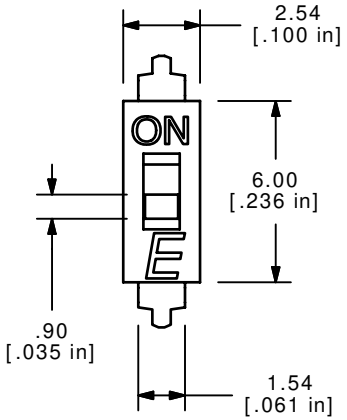



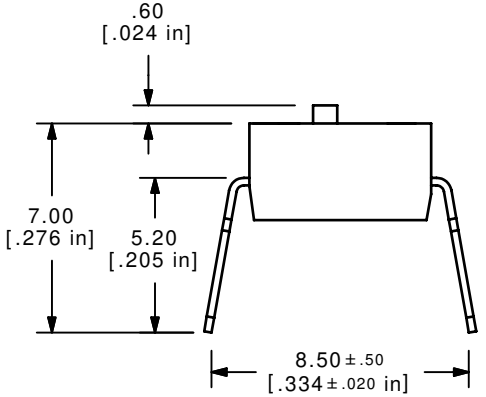




ISOMETRIC

CIRCUIT - 1 POSITION

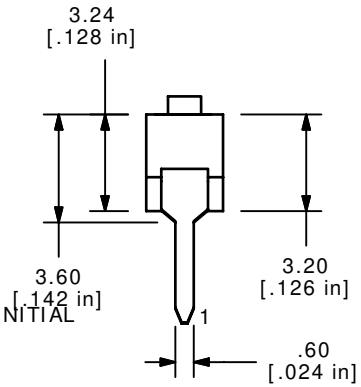


NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X= ± 0.4
   X.XX= ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC. (Switch)
   100mA @50VDC. (Carry)
▲5. CONTACT MATERIAL:
   CONTACTS: (MOVABLE) COPPER w/GOLD PLATE
   TERMINALS: BRASS w/GOLD PLATE
6. INSULATION RESISTANCE; 100 MEGA-OHMS MIN. @500VDC
7. CONTACT RESISTANCE; 50 MILLI-OHMS MAX @2-4VDC @100mA INITIAL
8. OPERATING TEMP: -40˚C TO +85˚C
▲9. PACKAGE: IN DISPENSING TUBES
   WITH ALL POLES IN THE "OFF" POSITION.
10. TRAVEL: 0.80mm
11. 2002/95/EC (ROHS) COMPLIANT.
12. ▲ DENOTES CRITICAL PARAMETER.

| REV | PCR NO | DESCRIPTION | DATE | BY |
|---|---|---|---|---|
| C | 16610 | TOOK OUT W/TAPE TEXT | 11/6/2006 | TN |
| B | 16438 | OMIT "TOP TAPE SEAL..." NOTE | 9/7/06 | BO |
| A | 16432 | RELEASED FOR PRODUCTION | 9/6/06 | BO |

*THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED*

E-SWITCH®

TITLE KAJ01LAGT

| SCALE | DATE | DR | DWG | REV |
|---|---|---|---|---|
| 4:1 | 9/6/2006 | BO | W823121 | C |