
SERIES KC 1901 SWITCHES

ROTARY SWITCHES

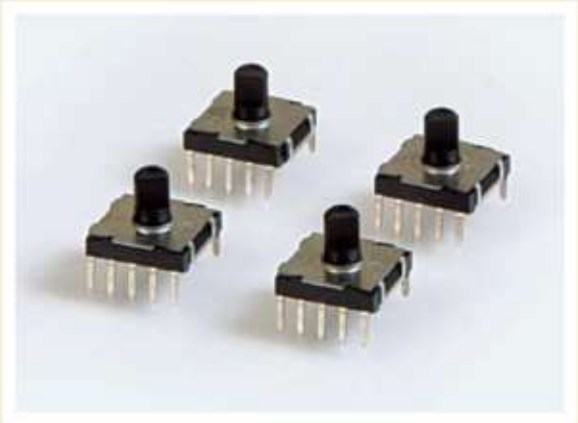

SPECIFICATIONS

Rating:	100 mA @ 16 VDC
Life Expectancy:	10,000 cycles typical
Contact Resistance:	50 mΩ initial @ 2-4 VDC, 100mA
Dielectric Strength:	1,000 max V rms at sea level
Insulation Resistance:	100 MΩ min.
Operating Force:	0.5 N/cm

MATERIALS

Cover:	Stainless steel
Contact:	Silver-plated copper alloy
Terminals:	Silver-plated copper alloy

FEATURES & BENEFITS

- 9-position rotary
- Thru-hole termination
- Positive detents

APPLICATIONS/MARKETS

- Industrial controls
- Test & instrumentation
- Appliance
- HVAC

HOW TO ORDER

SERIES	MODEL NO.	ACTUATOR LENGTH
KC	☐☐☐☐	☐
	1901	A = 9.8mm

Example Ordering Number


KC–1901–A


Specifications subject to change without notice.

KC


1901



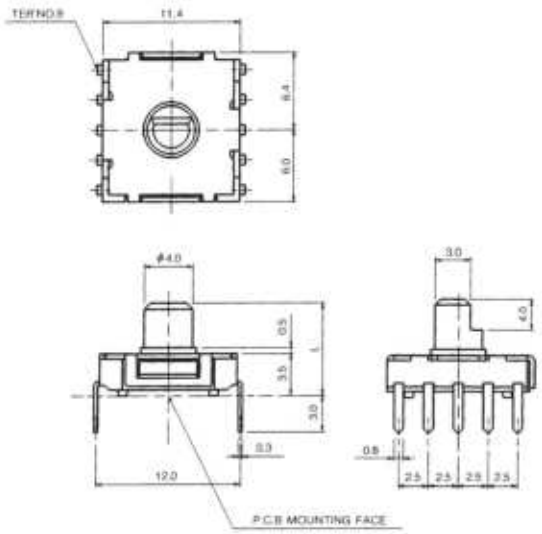

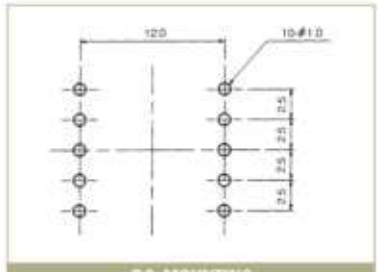

P.C. MOUNTING

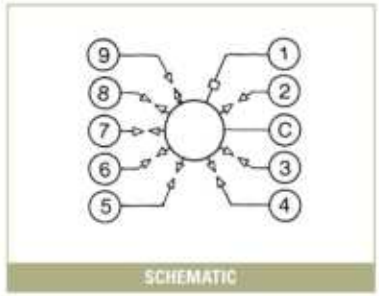

SCHEMATIC