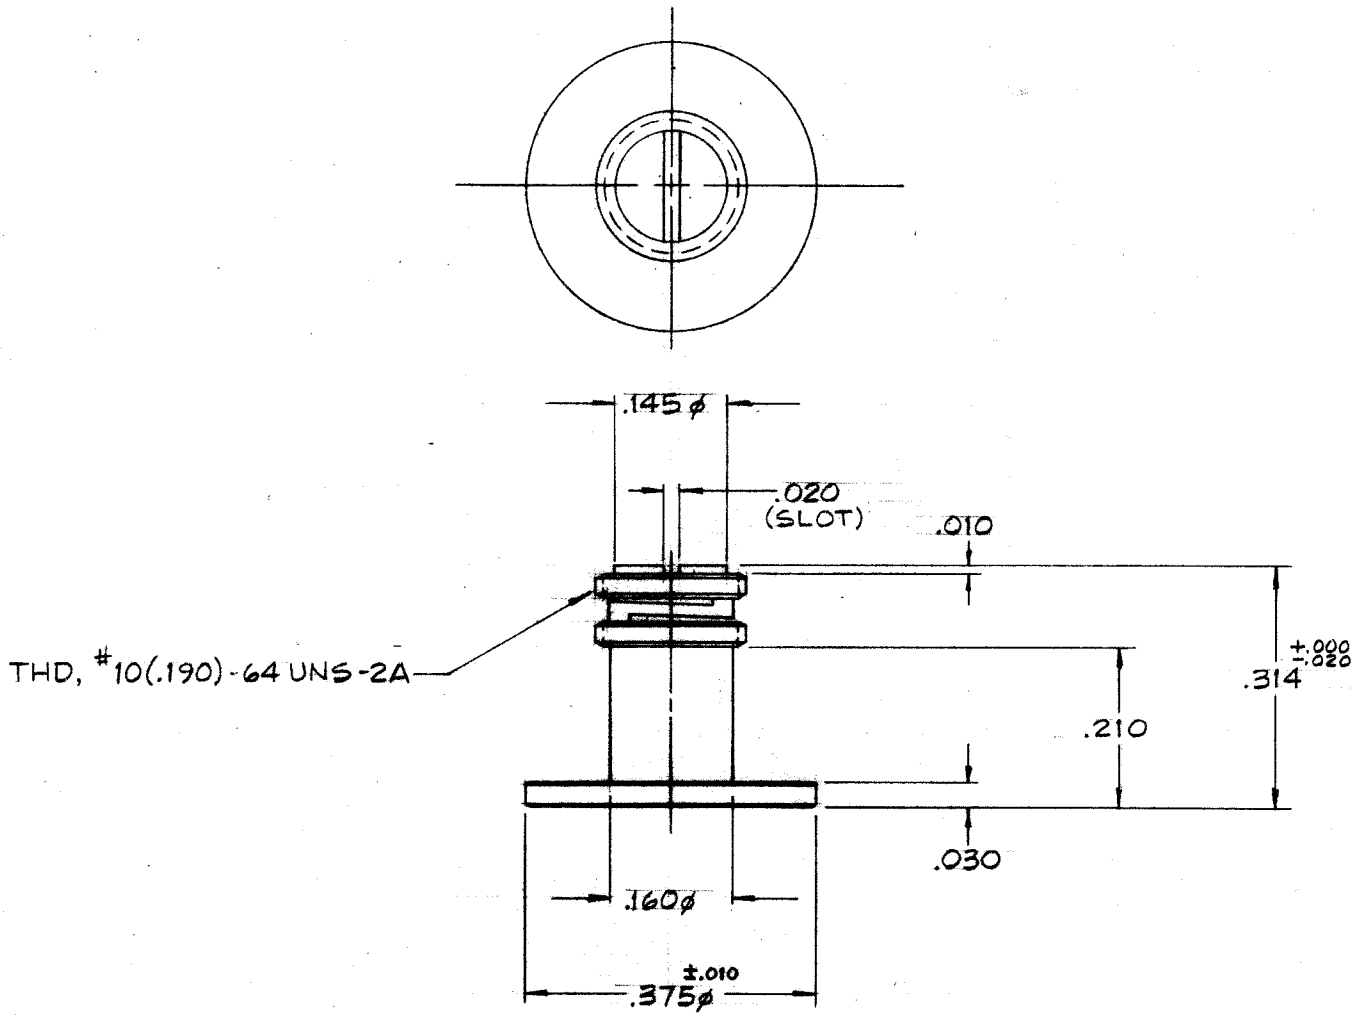


NOTES:
1. PRE-TORQUED AND LUBRICATED THREADS
2. USED FOR HIGH Q VARIABLE REACTANCE TUNING OF MICROWAVE CAVITIES, FILTERS, AND OTHER RESONANT STRUCTURES.

TUNING ROTOR (U.S. PAT. Re. 30,406)

DRN. [illegible] | APP. [illegible] | SCALE 4 IN. = 1 IN.

DATE 13 JAN 84 | DATE 1-16-84 | .XX ± .015 .XXX ± .005

Johanson MANUFACTURING CORPORATION
Rockaway Valley Road, Boonton, N.J. 07005 (201) 334-2676
ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

DRG. NO. L6997-14

REV. C 10 MAY 84