


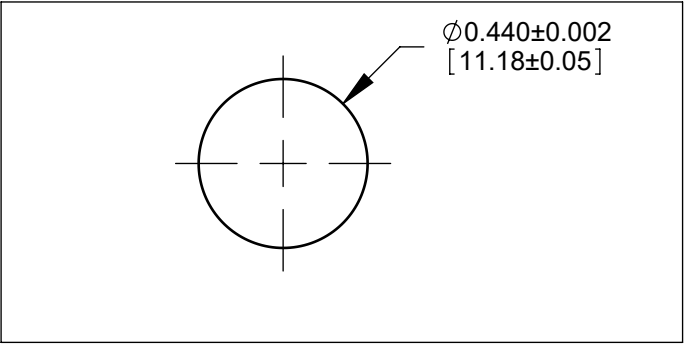
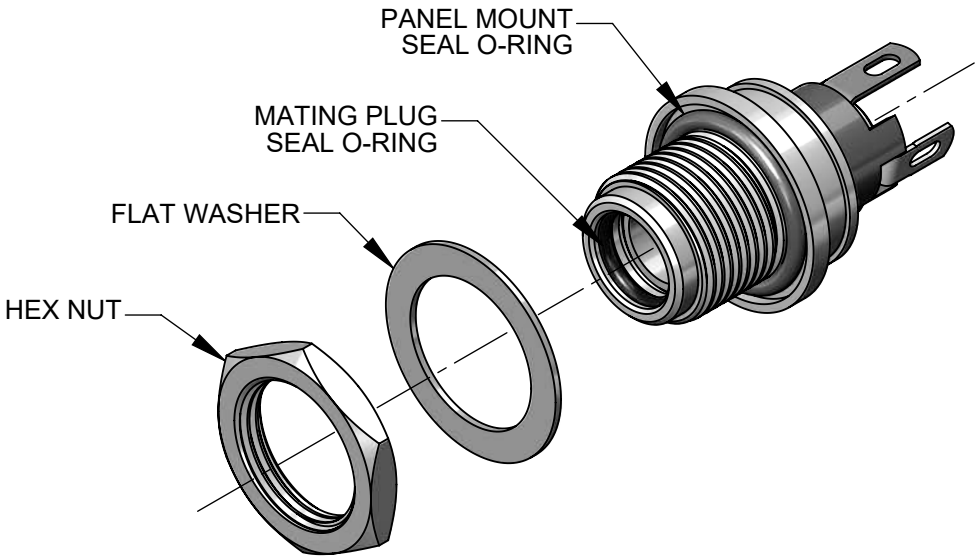
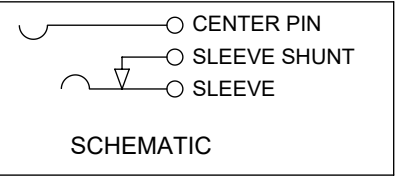


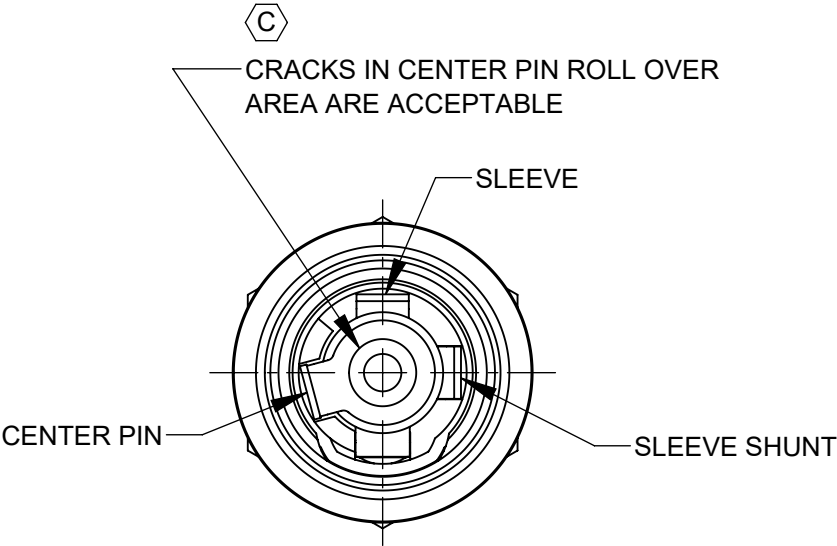

RECOMMENDED PANEL MTG HOLE

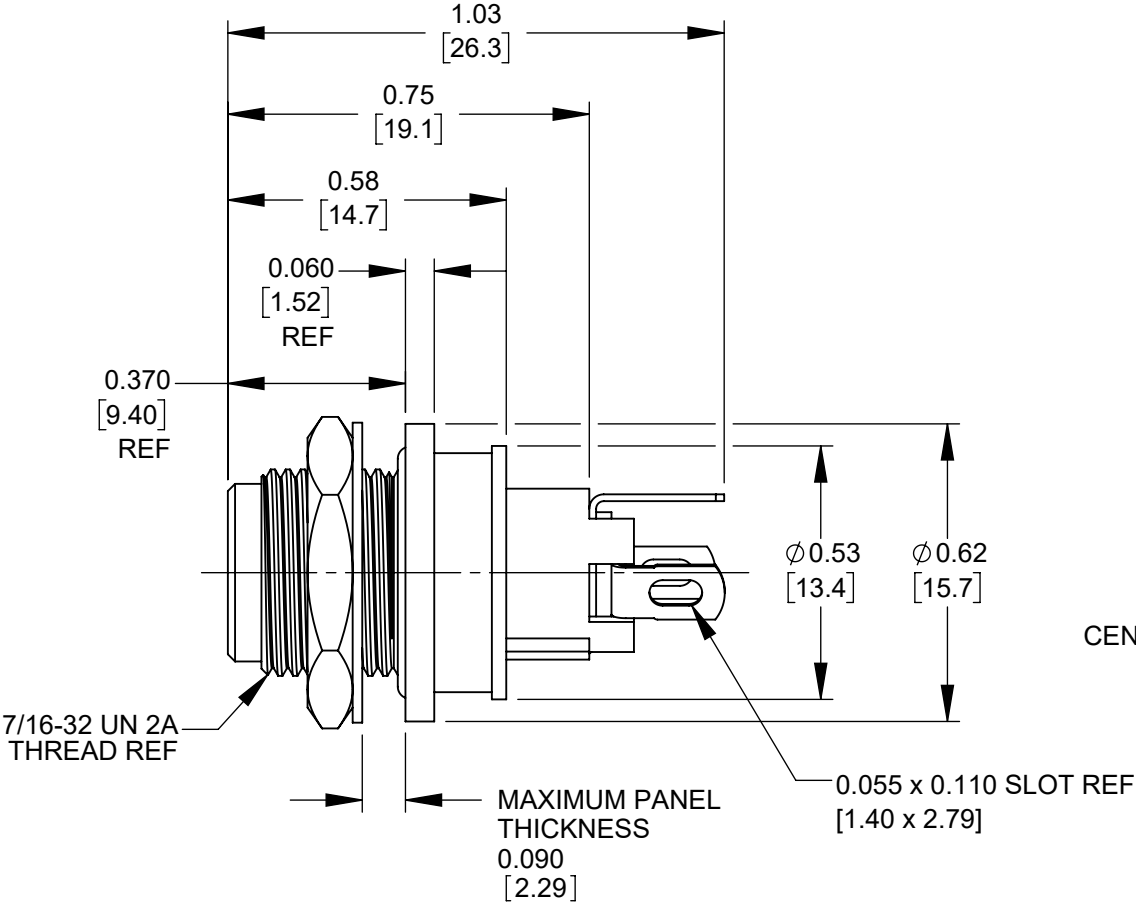

CENTER PIN/JACK SIZE
SEE TABLE

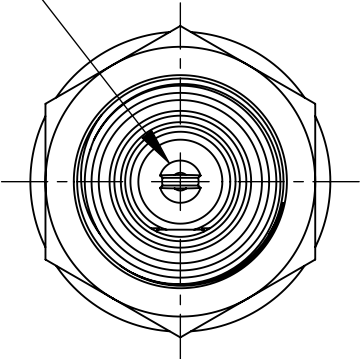

- NOTES:
- 1. DIMENSIONS SHOWN FOR REFERENCE ONLY.
 - 2. HEX NUT, FLAT WASHER, AND PANEL O-RING SUPPLIED UNASSEMBLED
 - 3. MATERIAL:
HOUSINGS, HEX NUT - COPPER ALLOY, NICKEL PLATED
INSULATOR HOUSING - THERMOPLASTIC, BEIGE
O-RINGS - THERMOPLASTIC RUBBER, LUBRICATED WITH SYNTHETIC GREASE
TERMINAL INSULATORS - PHENOLIC
FLAT WASHER - COPPER ALLOY, NICKEL PLATED
PIN, SPRING, TERMINALS - COPPER ALLOY, SILVER PLATED
 - 4. IT IS RECOMMENDED THAT THE JACK MOUNTING NUT BE TIGHTENED SNUG BY HAND BEFORE APPLYING A FINAL TIGHTENING TORQUE OF 8-10 LB-IN USING HAND TOOLS ONLY. POWER DRIVER OR IMPACT DRIVERS ARE NOT RECOMMENDED.
 - 5. THIS PRODUCT IS RoHS COMPLIANT

PART NUMBER	CENTER PIN Ø (JACK SIZE)	MATING POWER PLUG
L712ASH	0.10 (2.5 mm)	761KSH12, 761KSH15, 761KSH17
L722ASH	0.080 (2.0 mm)	S761KSH12, S761KSH15, S761KSH17

CUSTOMER DRAWING

					UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES [mm] - TWO PLACE DECIMALS ±0.02 [0.5] - THREE PLACE DECIMALS ±0.005 [0.13]	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.												
						SIZE	WIDTH		MULT		LBS/M		TEMPER					
						FINISH					MATERIAL							
						SPEC No.					SPEC No.							
C	28397	06/11/21	PC	TJK		FIRST USED ON				SCALE 2.5:1		Switchcraft®						
B	28350	12/22/20	PC	TJK		DATE DRAWN 6/27/16	BY PNK	CHKD PNK 6/27/16		APVD SRC 6/27/16								
A	27941	09/06/17	PC	TJK		SHEET 1 OF 1												
REV	ECO NUMBER	DATE	BY	APVD		NAME					PART No.		REV					
REVISIONS					DO NOT SCALE DRAWING					SEALED HT POWER JACKS SOLDER LUG, RoHS					L712ASH, L722ASH			C