1.8-V OPERATIONAL AMPLIFIERS WITH RAIL-TO-RAIL INPUT AND OUTPUT

Check for Samples: LMV931-Q1, LMV932-Q1, LMV934-Q1


FEATURES

- **Qualified for Automotive Applications**
- **1.8-V, 2.7-V, and 5-V Specifications**
- **Rail-to-Rail Output Swing**
  - **600-Ω Load: 80 mV From Rail**
  - **2-kΩ Load: 30 mV From Rail**
- **V_{ICR}: 200 mV Beyond Rails**
- **Gain Bandwidth: 1.4 MHz**
- **Supply Current: 100 µA/Amplifier**
- **Max V_{IO}: 4 mV**
- **Space-Saving Packages**
  - **LMV931: SOT-23 and SC-70**
  - **LMV932: SOIC**
  - **LMV934: SOIC**


APPLICATIONS

- **Industrial (Utility/Energy Metering)**
- **Automotive**
- **Communications (Optical Telecom, Data/Voice Cable Modems)**
- **Consumer Electronics (PDAs, PCs, CD-R/W, Portable Audio)**
- **Supply-Current Monitoring**
- **Battery Monitoring**


LMV931...DBV (SOT-23-5) OR DCK (SC-70) PACKAGE
(TOP VIEW)



LMV932...D (SOIC) PACKAGE
(TOP VIEW)



LMV934...D (SOIC) OR PW (TSSOP) PACKAGE
(TOP VIEW)



DESCRIPTION

The LMV93x devices are low-voltage low-power operational amplifiers that are well suited for today's low-voltage and/or portable applications. Specified for operation of 1.8 V to 5 V, they can be used in portable applications that are powered from a single-cell Li-ion or two-cell batteries. They have rail-to-rail input and output capability for maximum signal swings in low-voltage applications. The LMV93x input common-mode voltage extends 200 mV beyond the rails for increased flexibility. The output can swing rail-to-rail unloaded and typically can reach 80 mV from the rails, while driving a 600-Ω load (at 1.8-V operation).

During 1.8-V operation, the devices typically consume a quiescent current of 103 µA per channel, and yet they are able to achieve excellent electrical specifications, such as 101-dB open-loop DC gain and 1.4-MHz gain bandwidth. Furthermore, the amplifiers offer good output drive characteristics, with the ability to drive a 600-Ω load and 1000-pF capacitance with minimal ringing.

The LMV93x devices are offered in the latest packaging technology to meet the most demanding space-constraint applications. The LMV931 is offered in standard SOT-23 and SC-70 packages. The LMV932 is available in the traditional SOIC package. The LMV934 is available in the traditional SOIC package and the TSSOP package.

The LMV93x devices are characterized for operation from –40°C to 125°C, making the part universally suited for commercial, industrial, and automotive applications.

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.


Copyright © 2005–2010, Texas Instruments Incorporated

ORDERING INFORMATION(1)

T_A	PACKAGE(2)			ORDERABLE PART NUMBER	TOP-SIDE MARKING(3)
–40°C to 125°C	Single	SOT-23 – DBV	Reel of 3000	LMV931QDBVRQ1	RBB_
		SC-70 – DCK	Reel of 3000	LMV931QDCKRQ1	RB_
	Dual	SOIC – D	Reel of 2500	LMV932QDRQ1	MV932Q
	Quad	SOIC – D	Reel of 2500	LMV934QDRQ1	LMV934Q
		TSSOP – PW	Reel of 2000	LVM934QPWRQ1	LMV934Q

(1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at www.ti.com.
(2) Package drawings, thermal data, and symbolization are available at www.ti.com/packaging.
(3) DBV/DCK: The actual top-side marking has one additional character that designates the wafer fab/assembly site.

SIMPLIFIED SCHEMATIC

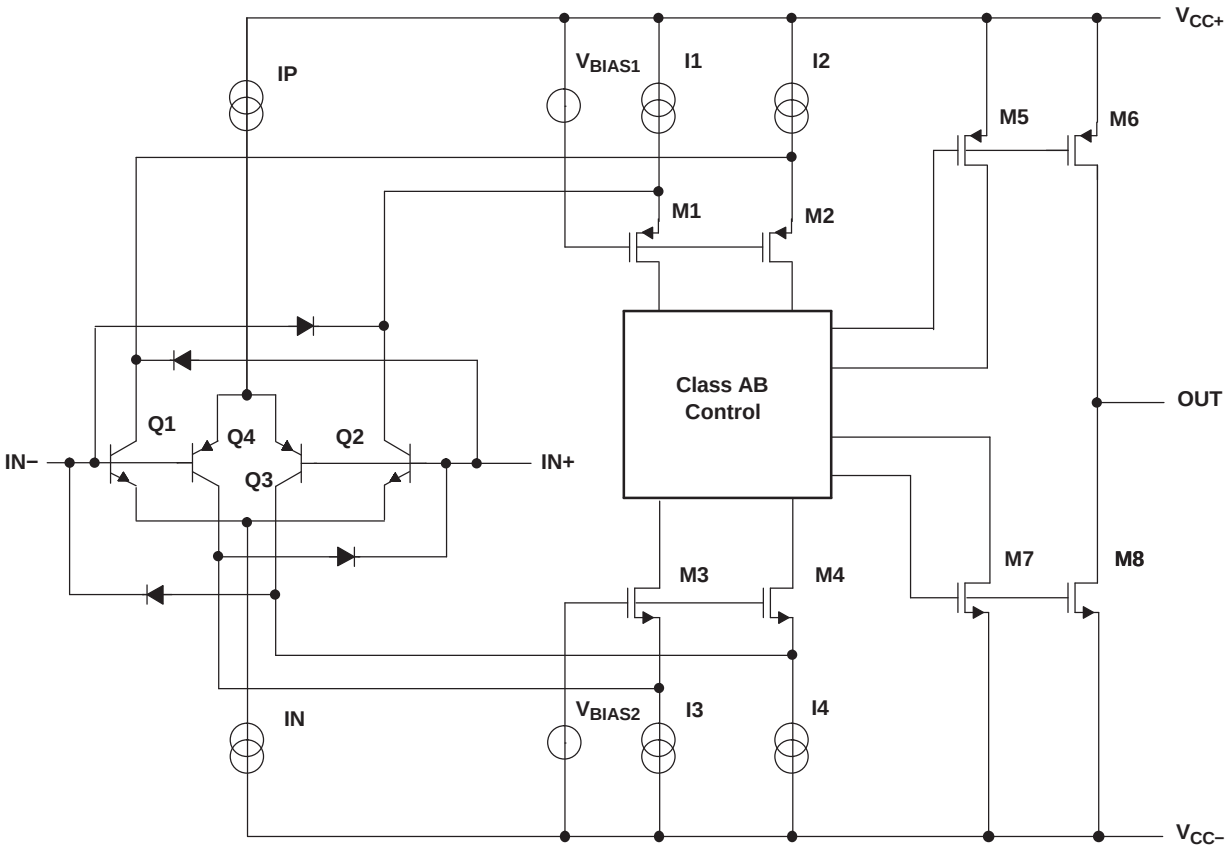

Copyright © 2005–2010, Texas Instruments Incorporated

ABSOLUTE MAXIMUM RATINGS(1)

over free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
$V_{CC+} - V_{CC-}$	Supply voltage(2)			5.5	V
V_{ID}	Differential input voltage(3)		Supply voltage		
V_I	Input voltage range, either input		V_{CC-} – 0.2	V_{CC+} + 0.2	V
	Duration of output short circuit (one amplifier) to $V_{CC\pm}$ (4) (5)		Unlimited		
θ_{JA}	Package thermal impedance(5) (6)	D package (8 pin)		97	°C/W
		D package (14 pin)		86	
		DBV package		206	
		DCK package		252	
		PW package		112.6	
T_J	Operating virtual junction temperature			150	°C
T_{stg}	Storage temperature range		–65	150	°C

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
(2) All voltage values (except differential voltages and V_{CC} specified for the measurement of I_{OS}) are with respect to the network GND.
(3) Differential voltages are at IN+ with respect to IN–.
(4) Applies to both single-supply and split-supply operation. Continuous short-circuit operation at elevated ambient temperature can result in exceeding the maximum allowed junction temperature of 150°C. Output currents in excess of 45 mA over long term may adversely affect reliability.
(5) Maximum power dissipation is a function of $T_J(max)$, θ_{JA}, and T_A. The maximum allowable power dissipation at any allowable ambient temperature is $P_D = (T_J(max) - T_A)/\theta_{JA}$. Operating at the absolute maximum T_J of 150°C can affect reliability.
(6) The package thermal impedance is calculated in accordance with JESD 51-7.

RECOMMENDED OPERATING CONDITIONS

		MIN	MAX	UNIT
V_{CC}	Supply voltage ($V_{CC+} - V_{CC-}$)	1.8	5	V
T_A	Operating free-air temperature	–40	125	°C

ESD PROTECTION

			TYP	UNIT
Human-Body Model			2000	V
Machine Model			200	V
Charged-Device Model	LMV934QPWRQ1	All pins	500	V
		Corner Pins	750	

Copyright © 2005–2010, Texas Instruments Incorporated

ELECTRICAL CHARACTERISTICS

V_{CC+} = 1.8 V, $V_{CC–}$ = 0 V, V_{IC} = V_{CC+}/2, V_O = V_{CC+}/2, R_L > 1 MΩ (unless otherwise noted)

PARAMETER			TEST CONDITIONS		T_A	MIN	TYP	MAX	UNIT
V_{IO}	Input offset voltage		LMV931 (single)		25°C		1	4	mV
					Full range			6	
			LMV932 (dual), LMV934 (quad)		25°C		1	5.5	
					Full range			7.5	
α_{VIO}	Average temperature coefficient of input offset voltage				25°C		5.5		µV/°C
I_{IB}	Input bias current		V_{IC} = V_{CC+} – 0.8 V		25°C		15	35	nA
					25°C			65	
					Full range			75	
I_{IO}	Input offset current				25°C		13	25	nA
					Full range			40	
I_{CC}	Supply current (per channel)				25°C		103	185	µA
					Full range			205	
CMRR	Common-mode rejection ratio		0 ≤ V_{IC} ≤ 0.6 V, 1.4 V ≤ V_{IC} ≤ 1.8 V		25°C	60	78		dB
					–40°C to 85°C	55			
			0.2 ≤ V_{IC} ≤ 0.6 V, 1.4 V ≤ V_{IC} ≤ 1.6 V		–40°C to 125°C	55			
			–0.2 ≤ V_{IC} ≤ 0 V, 1.8 V ≤ V_{IC} ≤ 2 V		25°C	50	72		
k_{SVR}	Supply-voltage rejection ratio		1.8 V ≤ V_{CC+} ≤ 5 V, V_{IC} = 0.5 V		25°C	72	100		dB
					Full range	65			
V_{ICR}	Common-mode input voltage range		CMRR ≥ 50 dB		25°C	$V_{CC–}$ – 0.2	–0.2 to 2.1	V_{CC+} + 0.2	V
					–40°C to 85°C	$V_{CC–}$		V_{CC+}	
					–40°C to 125°C	$V_{CC–}$ + 0.2		V_{CC+} – 0.2	
A_V	Large-signal voltage gain	LMV931	V_O = 0.2 V to 1.6 V, V_{IC} = 0.5 V	R_L = 600 Ω to 0.9 V	25°C	77	101		dB
					Full range	73			
				R_L = 2 kΩ to 0.9 V	25°C	80	105		
					Full range	75			
		LMV932, LMV934		R_L = 600 Ω to 0.9 V	25°C	75	90		
					Full range	72			
				R_L = 2 kΩ to 0.9 V	25°C	78	100		
					Full range	75			
V_O	Output swing		R_L = 600 Ω to 0.9 V, V_{ID} = ±100 mV	High level	25°C	1.65	1.72		V
					Full range	1.63			
				Low level	25°C		0.077	0.105	
					Full range			0.120	
			R_L = 2 kΩ to 0.9 V, V_{ID} = ±100 mV	High level	25°C	1.75	1.77		
					Full range	1.74			
				Low level	25°C		0.024	0.035	
					Full range			0.040	
I_{OS}	Output short-circuit current		V_O = 0 V, V_{ID} = 100 mV	Sourcing	25°C	4	8		mA
					Full range	3.3			
			V_O = 1.8 V, V_{ID} = –100 mV	Sinking	25°C	7	9		
					Full range	5			
GBW	Gain bandwidth product				25°C		1.4		MHz

Copyright © 2005–2010, Texas Instruments Incorporated

ELECTRICAL CHARACTERISTICS (continued)

V_{CC+} = 1.8 V, V_{CC-} = 0 V, V_{IC} = V_{CC+}/2, V_O = V_{CC+}/2, R_L > 1 MΩ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T_A	MIN	TYP	MAX	UNIT
SR	Slew rate(1)		25°C		0.35		V/µs
Φ_m	Phase margin		25°C		67		°
	Gain margin		25°C		7		dB
V_n	Equivalent input noise voltage	f = 1 kHz, V_{IC} = 0.5 V	25°C		60		nV/√Hz
I_n	Equivalent input noise current	f = 1 kHz	25°C		0.06		pA/√Hz
THD	Total harmonic distortion	f = 1 kHz, A_V = 1, R_L = 600 Ω, V_{ID} = 1 V_{p-p}	25°C		0.023		%
	Amplifier-to-amplifier isolation(2)		25°C		123		dB

(1) Number specified is the slower of the positive and negative slew rates.
(2) Input referred, V_{CC+} = 5 V and R_L = 100 kΩ connected to 2.5 V. Each amplifier is excited, in turn, with a 1-kHz signal to produce V_O = 3 V_{p-p}.

Copyright © 2005–2010, Texas Instruments Incorporated

ELECTRICAL CHARACTERISTICS

V_{CC+} = 2.7 V, $V_{CC–}$ = 0 V, V_{IC} = V_{CC+}/2, V_O = V_{CC+}/2, and R_L > 1 MΩ (unless otherwise noted)

PARAMETER			TEST CONDITIONS		T_A	MIN	TYP	MAX	UNIT
V_{IO}	Input offset voltage		LMV931 (single)		25°C		1	4	mV
					Full range			6	
			LMV932 (dual), LMV934 (quad)		25°C		1	5.5	
					Full range			7.5	
α_{VIO}	Average temperature coefficient of input offset voltage				25°C		5.5		µV/°C
I_{IB}	Input bias current		V_{IC} = V_{CC+} – 0.8 V		25°C		15	35	nA
					25°C			65	
					Full range			75	
I_{IO}	Input offset current				25°C		8	25	nA
					Full range			40	
I_{CC}	Supply current (per channel)				25°C		105	190	µA
					Full range			210	
CMRR	Common-mode rejection ratio		0 ≤ V_{IC} ≤ 1.5 V, 2.3 V ≤ V_{IC} ≤ 2.7 V		25°C	60	81		dB
					–40°C to 85°C	55			
			0.2 ≤ V_{IC} ≤ 1.5 V, 2.3 V ≤ V_{IC} ≤ 2.5 V		–40°C to 125°C	55			
			–0.2 ≤ V_{IC} ≤ 0 V, 2.7 V ≤ V_{IC} ≤ 2.9 V		25°C	50	74		
k_{SVR}	Supply-voltage rejection ratio		1.8 V ≤ V_{CC+} ≤ 5 V, V_{IC} = 0.5 V		25°C	72	100		dB
					Full range	65			
V_{ICR}	Common-mode input voltage range		CMRR ≥ 50 dB		25°C	$V_{CC–}$ – 0.2	–0.2 to 3	V_{CC+} + 0.2	V
					–40°C to 85°C	$V_{CC–}$		V_{CC+}	
					–40°C to 125°C	$V_{CC–}$ + 0.2		V_{CC+} – 0.2	
A_V	Large-signal voltage gain	LMV931	V_O = 0.2 V to 2.5 V	R_L = 600 Ω to 1.35 V	25°C	87	104		dB
					Full range	86			
				R_L = 2 kΩ to 1.35 V	25°C	92	110		
					Full range	91			
		LMV932, LMV934		R_L = 600 Ω to 1.35 V	25°C	78	90		
					Full range	75			
				R_L = 2 kΩ to 1.35 V	25°C	81	100		
					Full range	78			
V_O	Output swing		R_L = 600 Ω to 1.35 V, V_{ID} = ±100 mV	High level	25°C	2.55	2.62		V
					Full range	2.53			
				Low level	25°C		0.083	0.11	
					Full range			0.13	
			R_L = 2 kΩ to 1.35 V, V_{ID} = ±100 mV	High level	25°C	2.65	2.675		
					Full range	2.64			
				Low level	25°C		0.025	0.04	
					Full range			0.045	
I_{OS}	Output short-circuit current		V_O = 0 V, V_{ID} = 100 mV	Sourcing	25°C	20	30		mA
					Full range	15			
			V_O = 2.7 V, V_{ID} = –100 mV	Sinking	25°C	18	25		
					Full range	12			
GBW	Gain bandwidth product				25°C		1.4		MHz

Copyright © 2005–2010, Texas Instruments Incorporated

ELECTRICAL CHARACTERISTICS (continued)

V_{CC+} = 2.7 V, V_{CC-} = 0 V, V_{IC} = V_{CC+}/2, V_O = V_{CC+}/2, and R_L > 1 MΩ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T_A	MIN	TYP	MAX	UNIT
SR	Slew rate(1)		25°C		0.4		V/µs
Φ_m	Phase margin		25°C		70		°
	Gain margin		25°C		7.5		dB
V_n	Equivalent input noise voltage	f = 1 kHz, V_{IC} = 0.5 V	25°C		57		nV/√Hz
I_n	Equivalent input noise current	f = 1 kHz	25°C		0.082		pA/√Hz
THD	Total harmonic distortion	f = 1 kHz, A_V = 1, R_L = 600 Ω, V_{ID} = 1 V_{p-p}	25°C		0.022		%
	Amplifier-to-amplifier isolation(2)		25°C		123		dB

(1) Number specified is the slower of the positive and negative slew rates.
(2) Input referred, V_{CC+} = 5 V and R_L = 100 kΩ connected to 2.5 V. Each amplifier is excited, in turn, with a 1-kHz signal to produce V_O = 3 V_{p-p}.

Copyright © 2005–2010, Texas Instruments Incorporated

ELECTRICAL CHARACTERISTICS

V_{CC+} = 5 V, V_{CC-} = 0 V, V_{IC} = V_{CC+}/2, V_O = V_{CC+}/2, and R_L > 1 MΩ (unless otherwise noted)

PARAMETER			TEST CONDITIONS		T_A	MIN	TYP	MAX	UNIT
V_{IO}	Input offset voltage		LMV931 (single)		25°C		1	4	mV
					Full range			6	
			LMV932 (dual), LMV934 (quad)		25°C		1	5.5	
					Full range			7.5	
α_{VIO}	Average temperature coefficient of input offset voltage				25°C		5.5		µV/°C
I_{IB}	Input bias current		V_{IC} = V_{CC+} – 0.8 V		25°C		15	35	nA
					25°C			65	
					Full range			75	
I_{IO}	Input offset current				25°C		9	25	nA
					Full range			40	
I_{CC}	Supply current (per channel)		LMV931		25°C		116	210	µA
					Full range			230	
			LMV932, LMV934		25°C		116	225	
					Full range			275	
CMRR	Common-mode rejection ratio		0 ≤ V_{IC} ≤ 3.8 V, 4.6 V ≤ V_{IC} ≤ 5 V		25°C	60	86		dB
					–40°C to 85°C	55			
			0.3 ≤ V_{IC} ≤ 3.8 V, 4.6 V ≤ V_{IC} ≤ 4.7 V		–40°C to 125°C	55			
			–0.2 ≤ V_{IC} ≤ 0 V, 5 V ≤ V_{IC} ≤ 5.2 V		25°C	50	78		
k_{SVR}	Supply-voltage rejection ratio		1.8 V ≤ V_{CC+} ≤ 5 V, V_{IC} = 0.5 V		25°C	72	100		dB
					Full range	65			
V_{ICR}	Common-mode input voltage range		CMRR ≥ 50 dB		25°C	V_{CC-} – 0.2	–0.2 to 5.3	V_{CC+} + 0.2	V
					–40°C to 85°C	V_{CC-}		V_{CC+}	
					–40°C to 125°C	V_{CC-} + 0.3		V_{CC+} – 0.3	
A_V	Large-signal voltage gain	LMV931	V_O = 0.2 V to 4.8 V	R_L = 600 Ω to 2.5 V	25°C	88	102		dB
					Full range	87			
				R_L = 2 kΩ to 2.5 V	25°C	94	113		
					Full range	93			
		LMV932, LMV934		R_L = 600 Ω to 2.5 V	25°C	81	90		
					Full range	78			
				R_L = 2 kΩ to 2.5 V	25°C	85	100		
					Full range	82			
V_O	Output swing		R_L = 600 Ω to 2.5 V, V_{ID} = ±100 mV	High level	25°C	4.855	4.89		V
					Full range	4.835			
				Low level	25°C		0.12	0.16	
					Full range			0.18	
			R_L = 2 kΩ to 2.5 V, V_{ID} = ±100 mV	High level	25°C	4.945	4.967		
					Full range	4.935			
				Low level	25°C		0.037	0.065	
					Full range			0.075	

Copyright © 2005–2010, Texas Instruments Incorporated

ELECTRICAL CHARACTERISTICS (continued)

V_{CC+} = 5 V, V_{CC-} = 0 V, V_{IC} = V_{CC+}/2, V_O = V_{CC+}/2, and R_L > 1 MΩ (unless otherwise noted)

PARAMETER			TEST CONDITIONS		T_A	MIN	TYP	MAX	UNIT
I_{OS}	Output short-circuit current	LMV931	V_O = 0 V, V_{ID} = 100 mV	Sourcing	25°C	80	100		mA
					Full range	68			
			V_O = 5 V, V_{ID} = –100 mV	Sinking	25°C	58	65		
					Full range	45			
		LMV932, LMV934	V_O = 0 V, V_{ID} = 100 mV	Sourcing	25°C	75	100		
					Full range	68			
			V_O = 5 V, V_{ID} = –100 mV	Sinking	25°C	50	65		
					Full range		60		
GBW	Gain bandwidth product				25°C		1.5		MHz
SR	Slew rate(1)				25°C		0.42		V/µs
Φ_m	Phase margin				25°C		71		°
	Gain margin				25°C		8		dB
V_n	Equivalent input noise voltage		f = 1 kHz, V_{IC} = 0.5 V		25°C		50		nV/√Hz
I_n	Equivalent input noise current		f = 1 kHz		25°C		0.07		pA/√Hz
THD	Total harmonic distortion		f = 1 kHz, A_V = 1, R_L = 600 Ω, V_{ID} = 1 V_{p-p}		25°C		0.022		%
	Amplifier-to-amplifier isolation(2)				25°C		123		dB

(1) Number specified is the slower of the positive and negative slew rates.
(2) Input referred, V_{CC+} = 5 V and R_L = 100 kΩ connected to 2.5 V. Each amplifier is excited, in turn, with a 1-kHz signal to produce V_O = 3 V_{p-p}.

Copyright © 2005–2010, Texas Instruments Incorporated

TYPICAL CHARACTERISTICS

V_{CC+} = 5 V, Single Supply, T_A = 25°C (unless otherwise specified)

SUPPLY CURRENT vs SUPPLY VOLTAGE

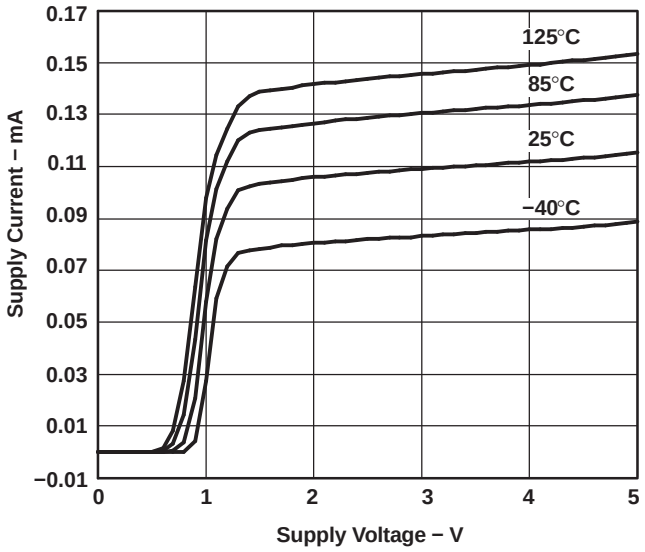


Figure 1.

SLEW RATE vs SUPPLY VOLTAGE

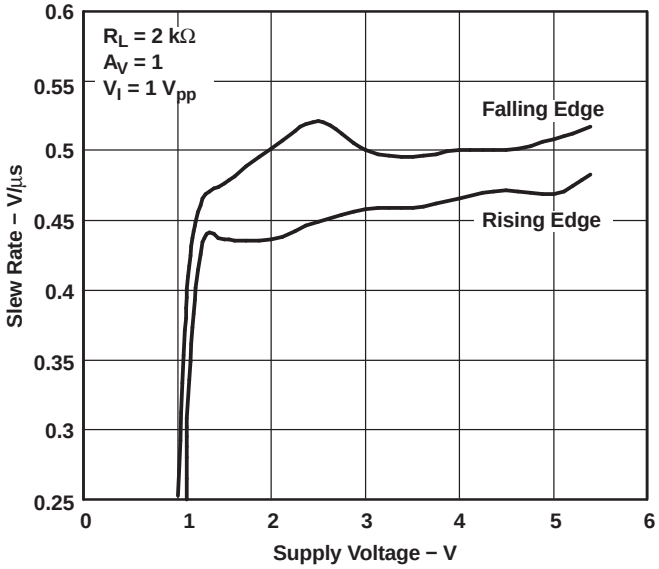


Figure 2.

SOURCE CURRENT vs OUTPUT VOLTAGE

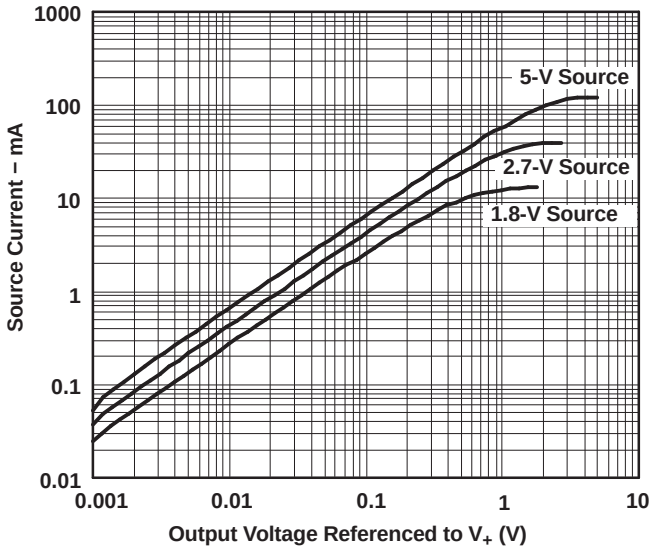


Figure 3.

SINK CURRENT vs OUTPUT VOLTAGE

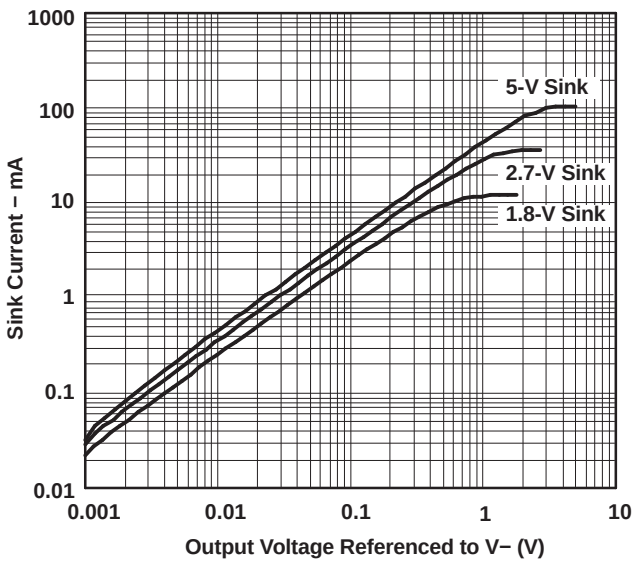


Figure 4.

Copyright © 2005–2010, Texas Instruments Incorporated

TYPICAL CHARACTERISTICS (continued)

V_{CC+} = 5 V, Single Supply, T_A = 25°C (unless otherwise specified)

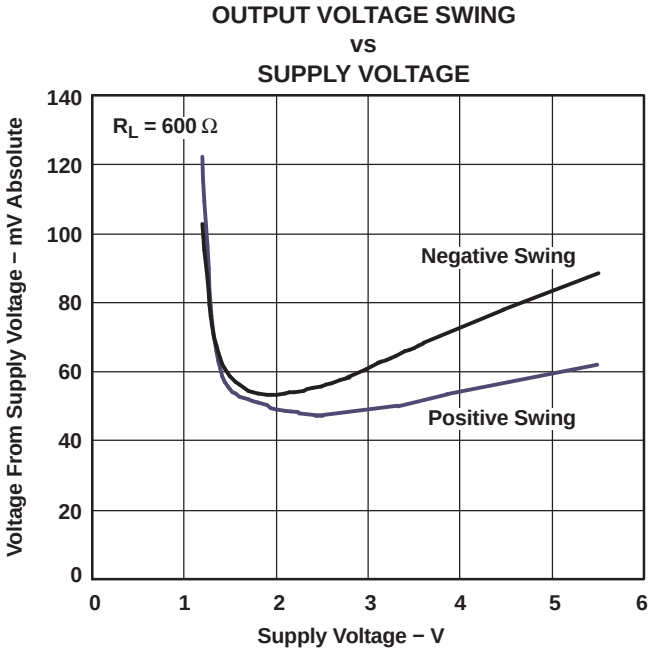


Figure 5.

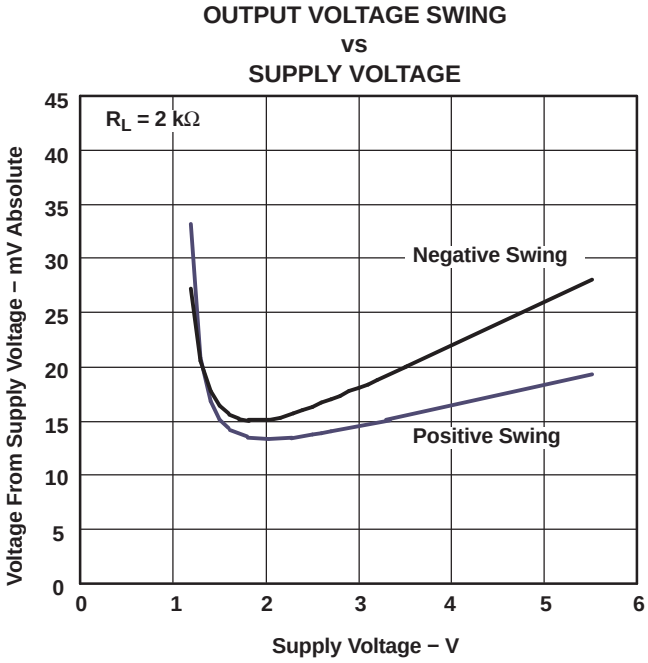


Figure 6.

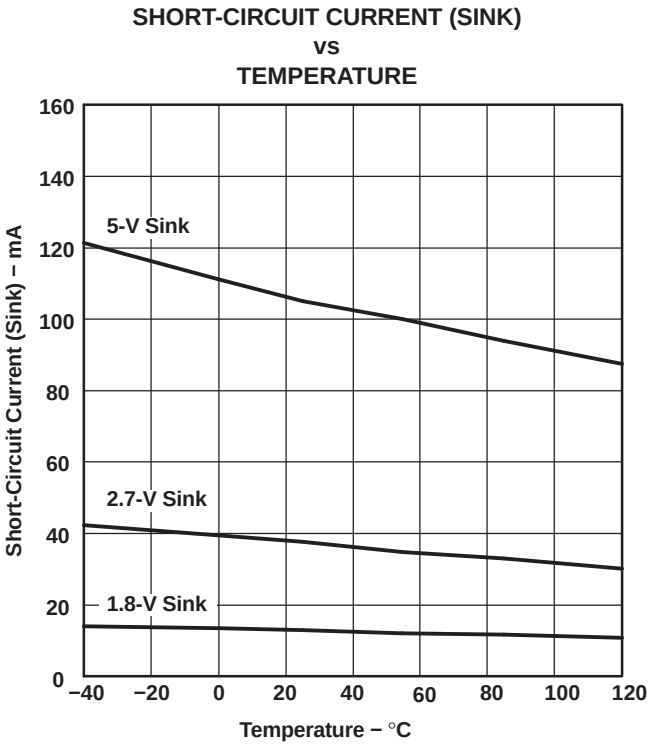


Figure 7.

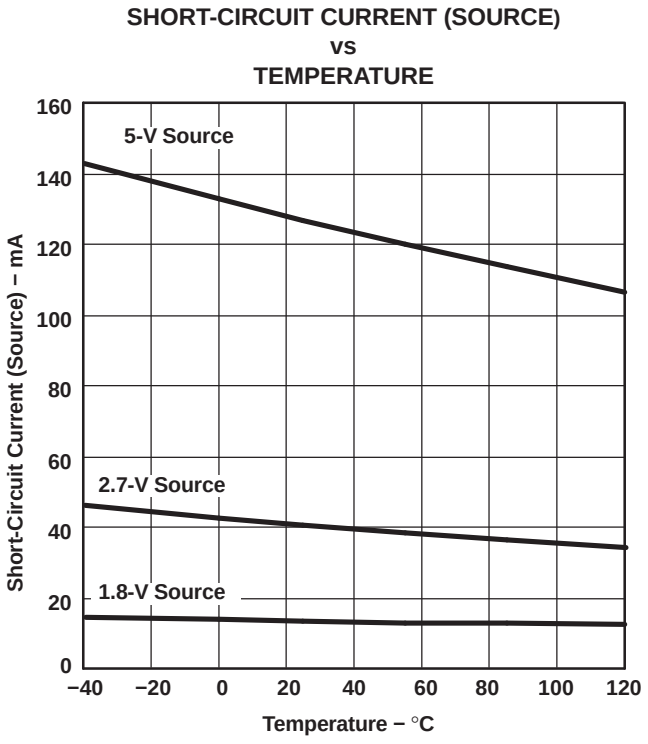


Figure 8.

Copyright © 2005–2010, Texas Instruments Incorporated

TYPICAL CHARACTERISTICS (continued)

V_{CC+} = 5 V, Single Supply, T_A = 25°C (unless otherwise specified)

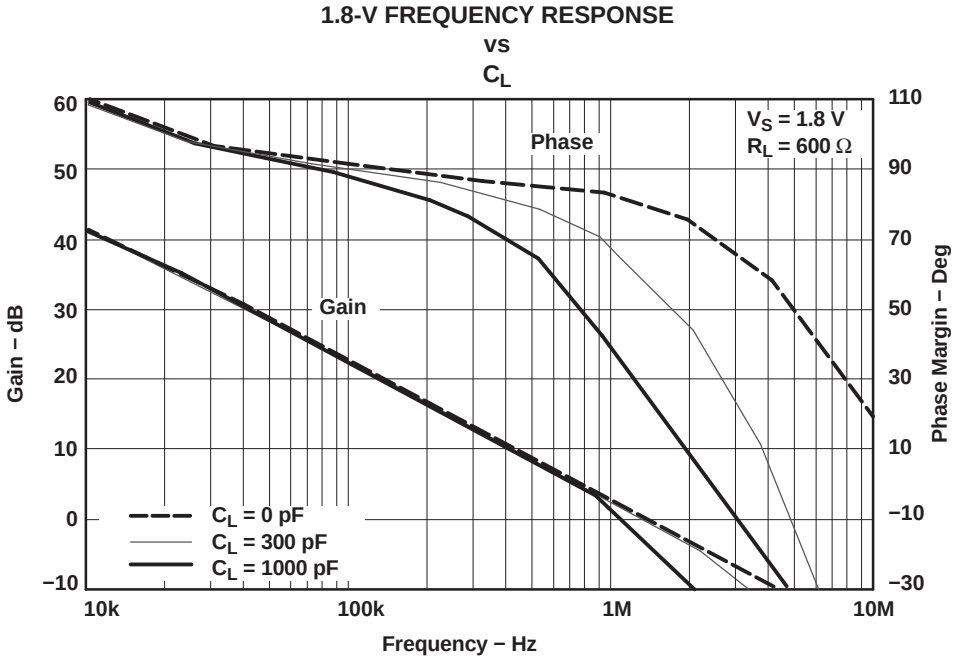


Figure 9.

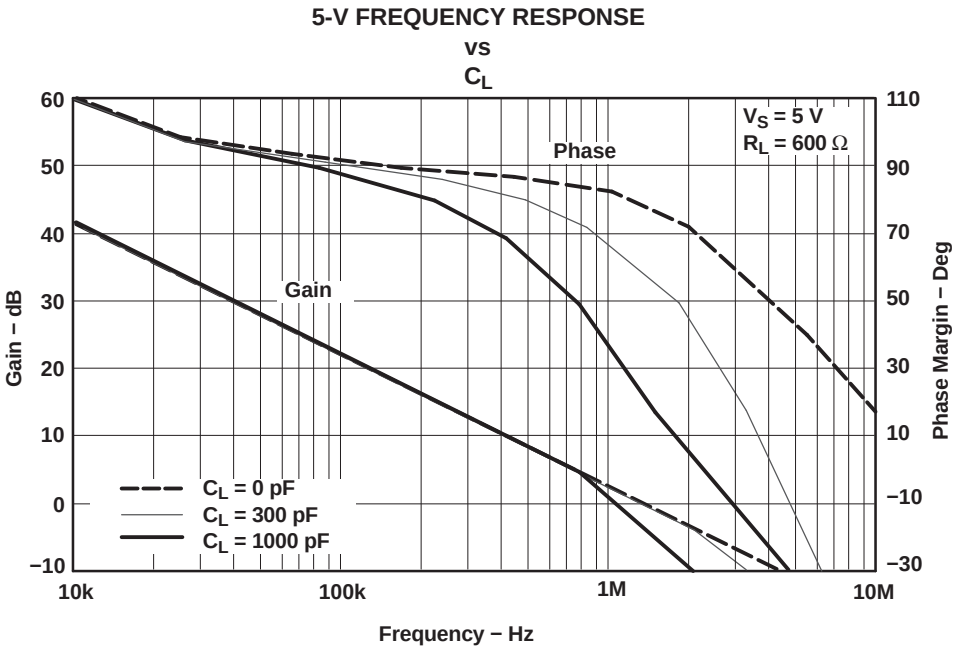


Figure 10.

Copyright © 2005–2010, Texas Instruments Incorporated

TYPICAL CHARACTERISTICS (continued)

V_{CC+} = 5 V, Single Supply, T_A = 25°C (unless otherwise specified)

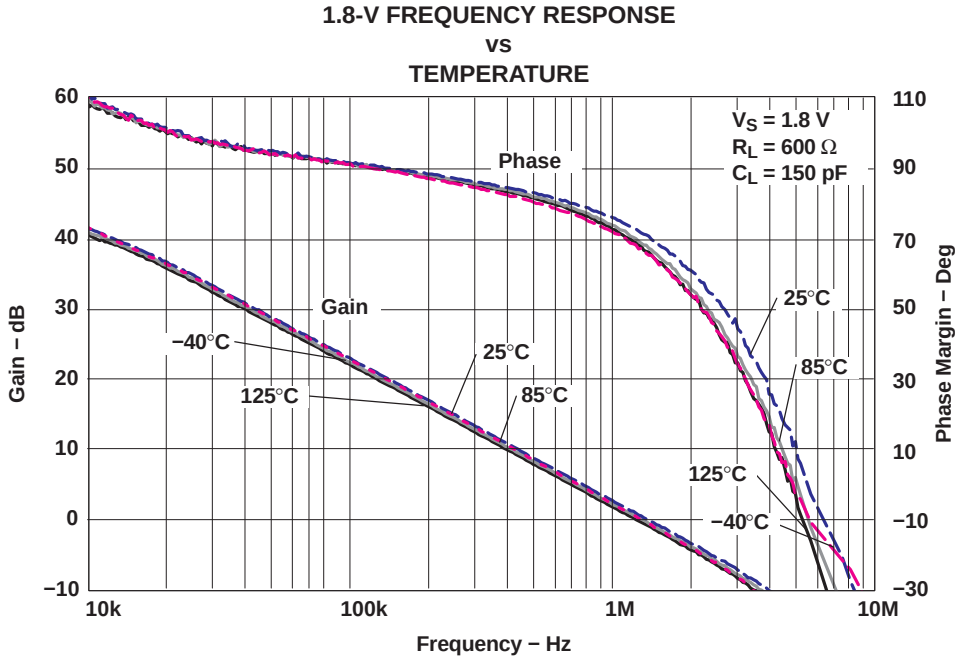


Figure 11.

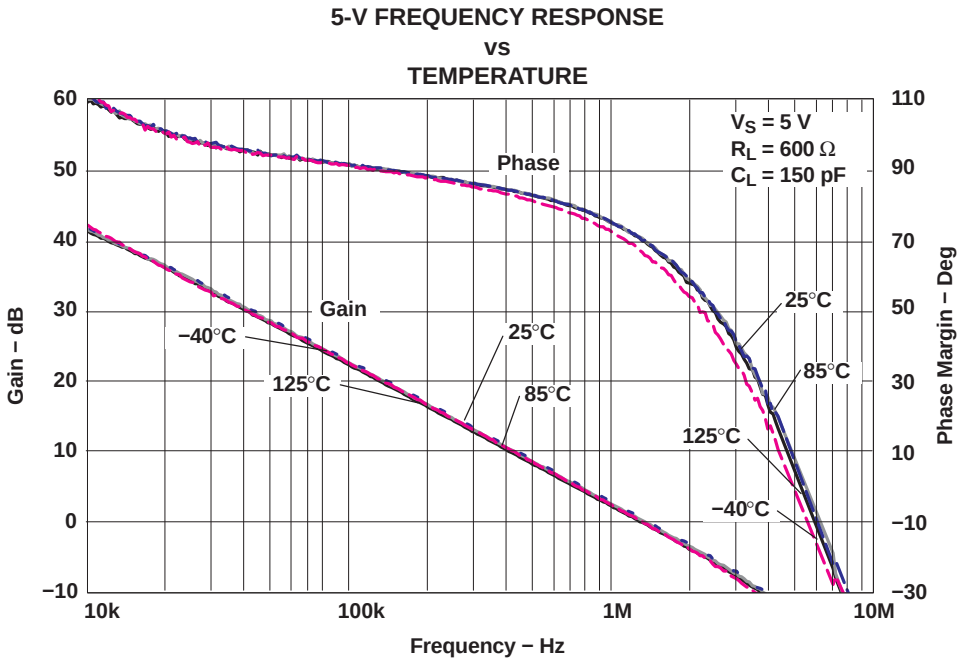


Figure 12.

TYPICAL CHARACTERISTICS (continued)

V_{CC+} = 5 V, Single Supply, T_A = 25°C (unless otherwise specified)

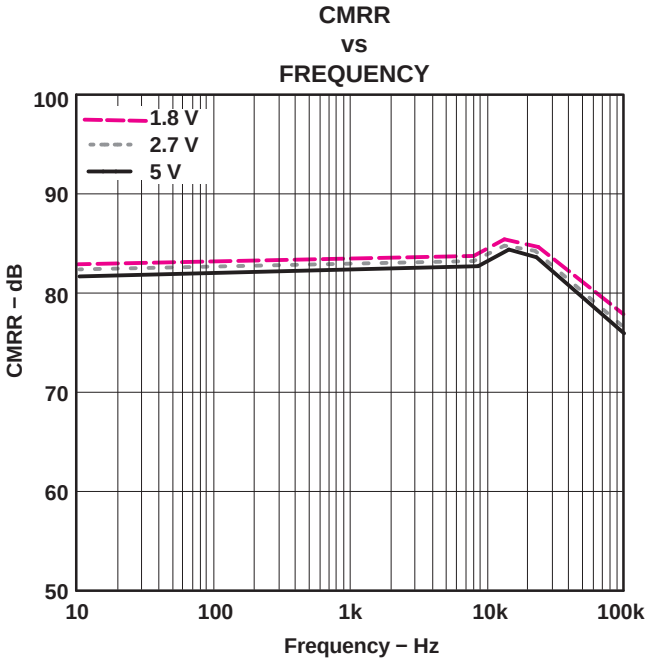


Figure 13.

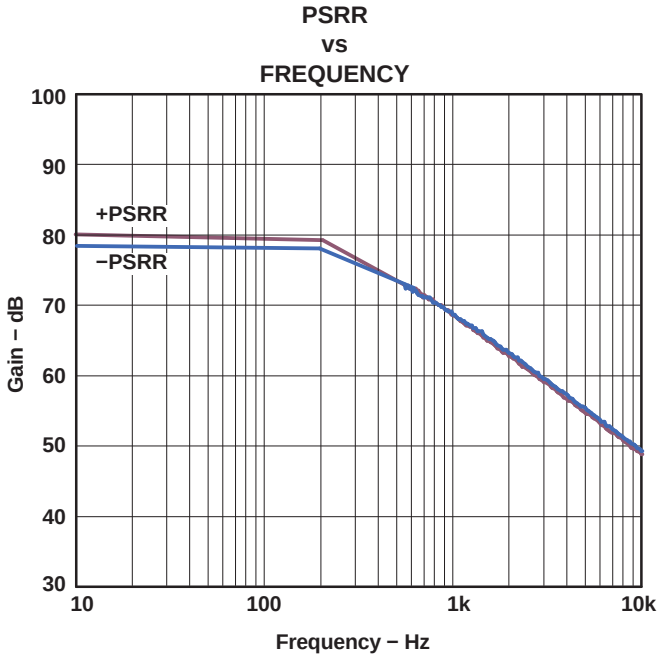


Figure 14.

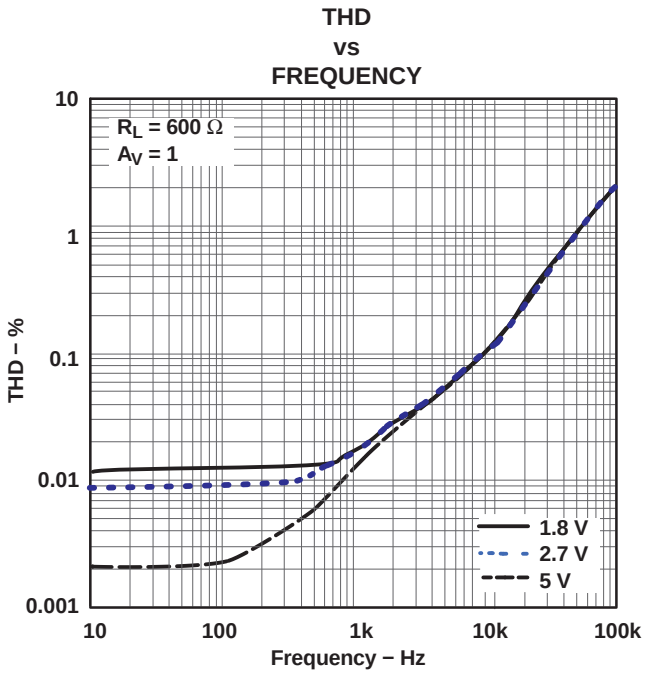


Figure 15.

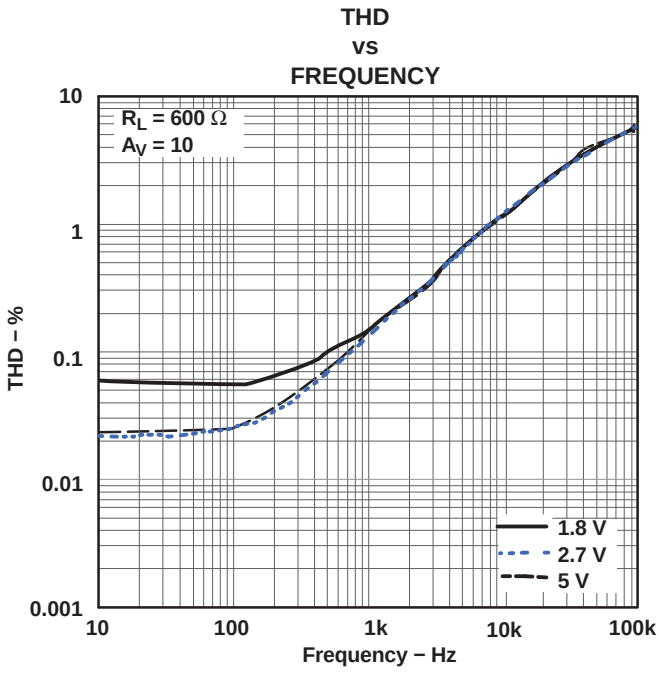


Figure 16.

Copyright © 2005–2010, Texas Instruments Incorporated

TYPICAL CHARACTERISTICS (continued)

V_{CC+} = 5 V, Single Supply, T_A = 25°C (unless otherwise specified)

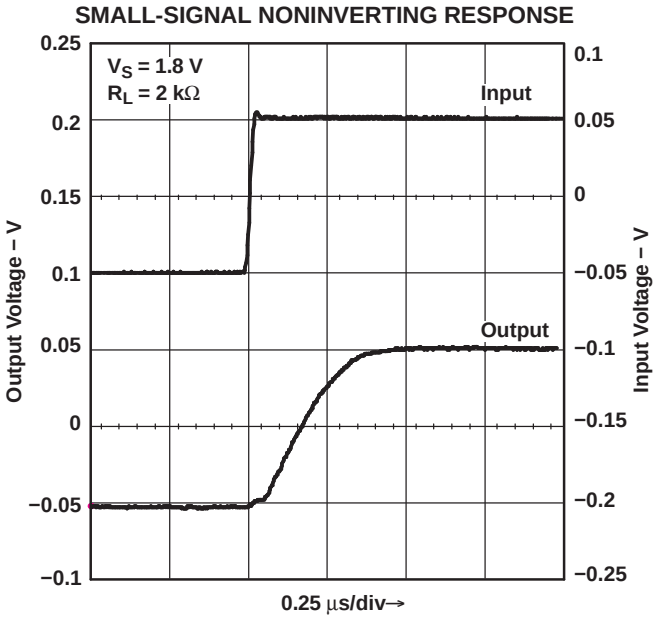


Figure 17.

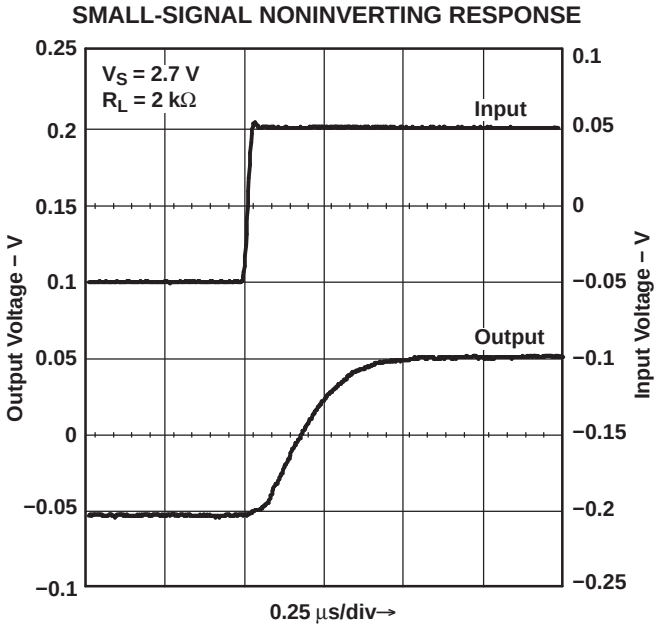


Figure 18.

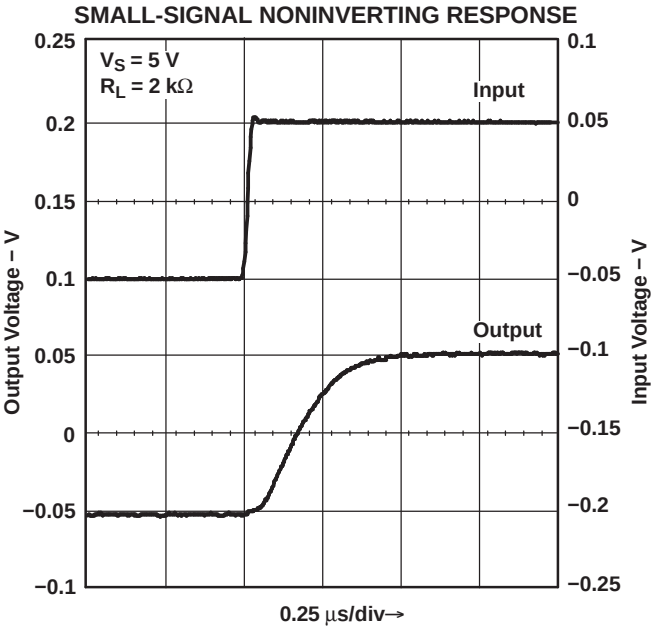


Figure 19.

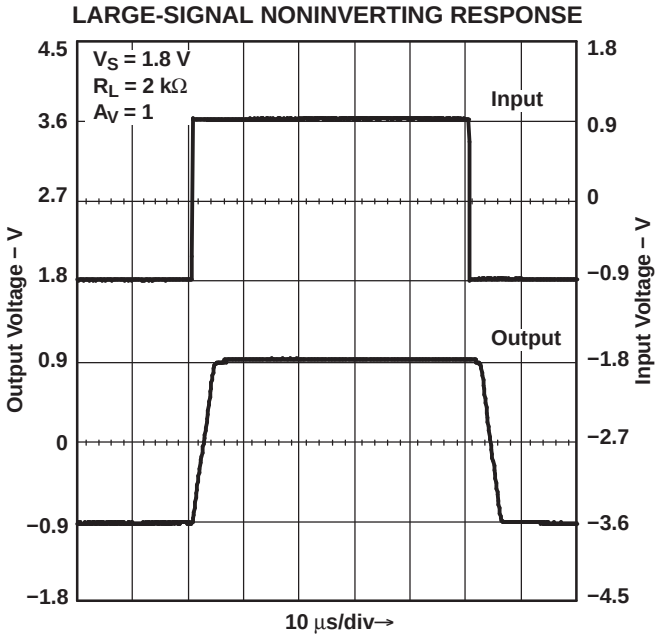


Figure 20.

TYPICAL CHARACTERISTICS (continued)

V_{CC+} = 5 V, Single Supply, T_A = 25°C (unless otherwise specified)

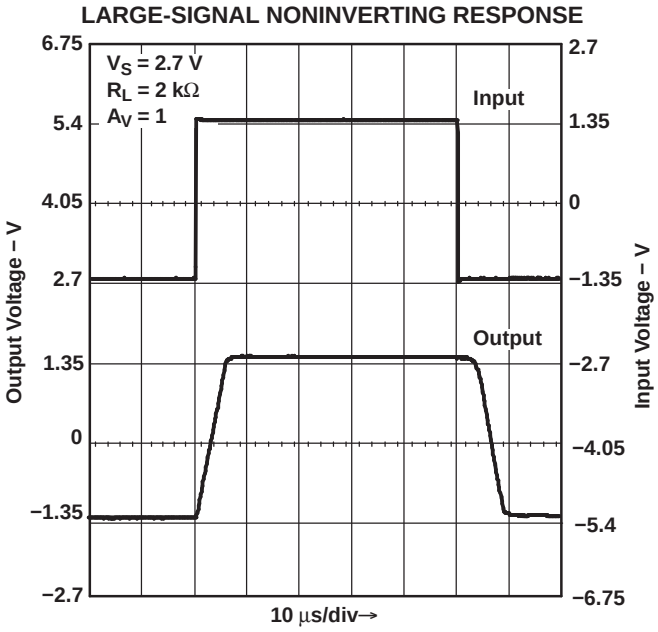


Figure 21.

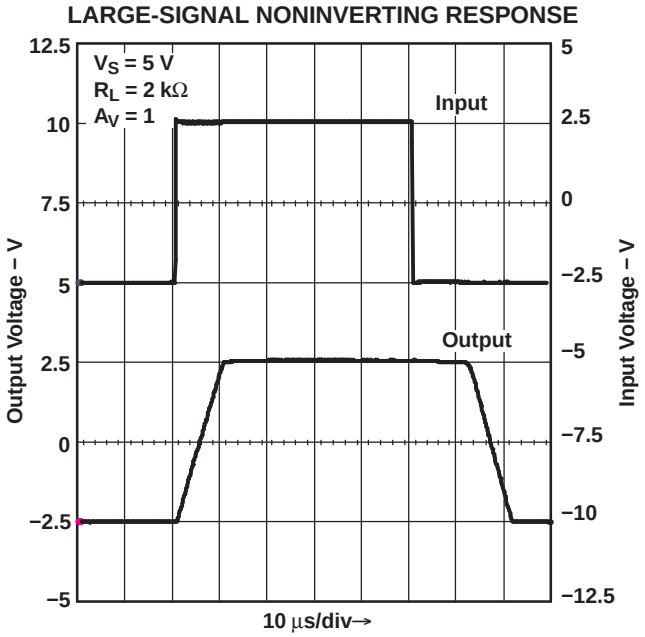


Figure 22.

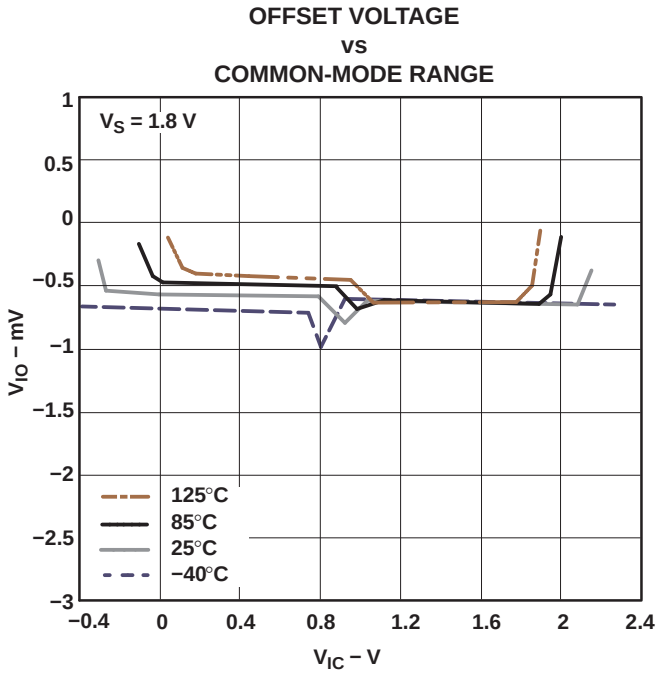


Figure 23.

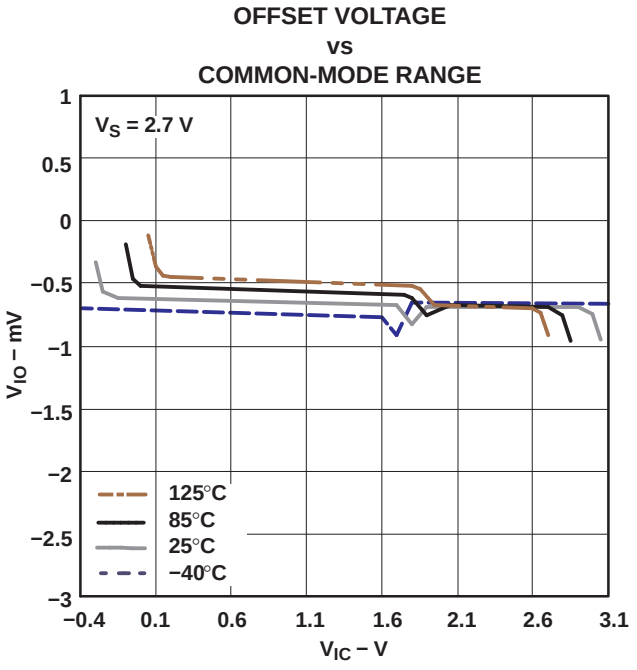


Figure 24.

Copyright © 2005–2010, Texas Instruments Incorporated

TYPICAL CHARACTERISTICS (continued)

V_{CC+} = 5 V, Single Supply, T_A = 25°C (unless otherwise specified)

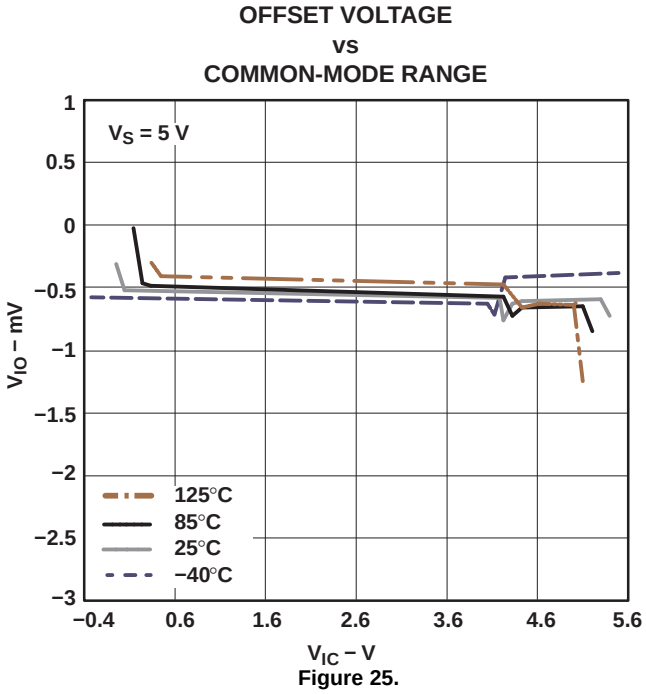


Figure 25.

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/ Ball Finish	MSL Peak Temp (3)	Samples (Requires Login)
LMV931QDBVRQ1	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
LMV931QDCKRQ1	ACTIVE	SC70	DCK	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
LMV932QDRQ1	ACTIVE	SOIC	D	8	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
LMV934QDRQ1	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
LMV934QPWRQ1	ACTIVE	TSSOP	PW	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.
TBD: The Pb-Free/Green conversion plan has not been defined.
Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.
Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.
Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF LMV931-Q1, LMV932-Q1, LMV934-Q1 :


- Catalog: LMV931, LMV932, LMV934

NOTE: Qualified Version Definitions:


- Catalog - TI's standard catalog product

TAPE AND REEL INFORMATION

REEL DIMENSIONS

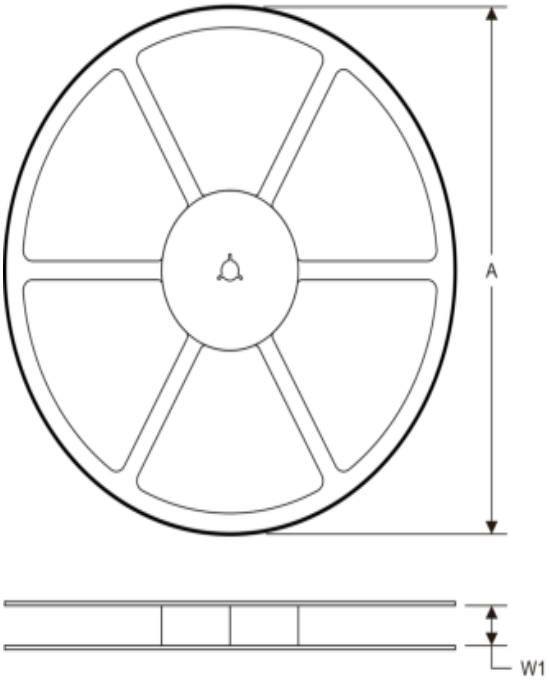

TAPE DIMENSIONS

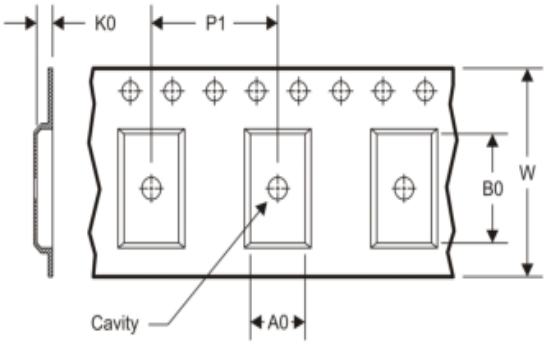


A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

TAPE AND REEL INFORMATION

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LMV932QDRQ1	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
LMV934QDRQ1	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
LMV934QPWRQ1	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1


TAPE AND REEL BOX DIMENSIONS

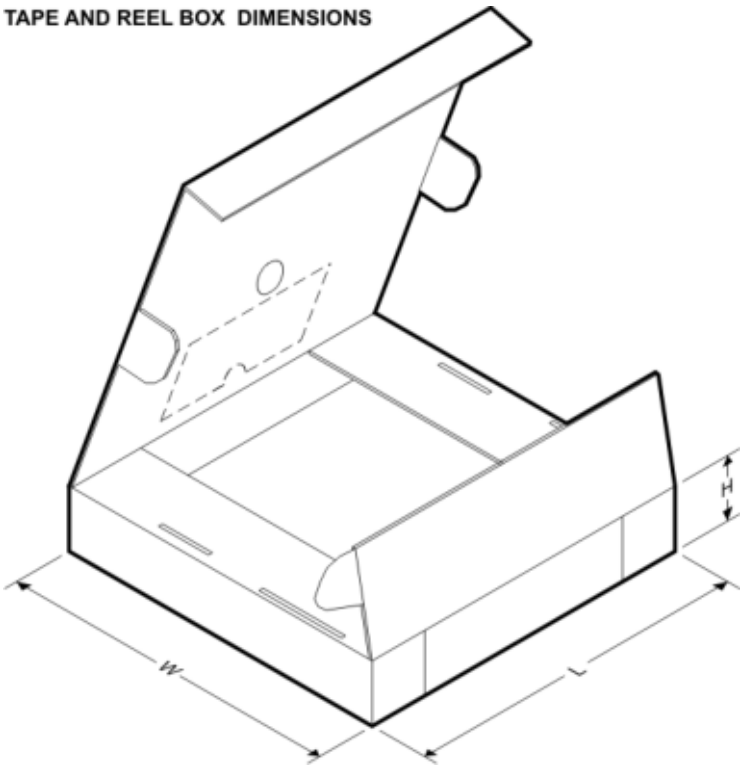

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LMV932QDRQ1	SOIC	D	8	2500	340.5	338.1	20.6
LMV934QDRQ1	SOIC	D	14	2500	367.0	367.0	38.0
LMV934QPWRQ1	TSSOP	PW	14	2000	367.0	367.0	35.0


DBV (R–PDSO–G5) PLASTIC SMALL–OUTLINE PACKAGE

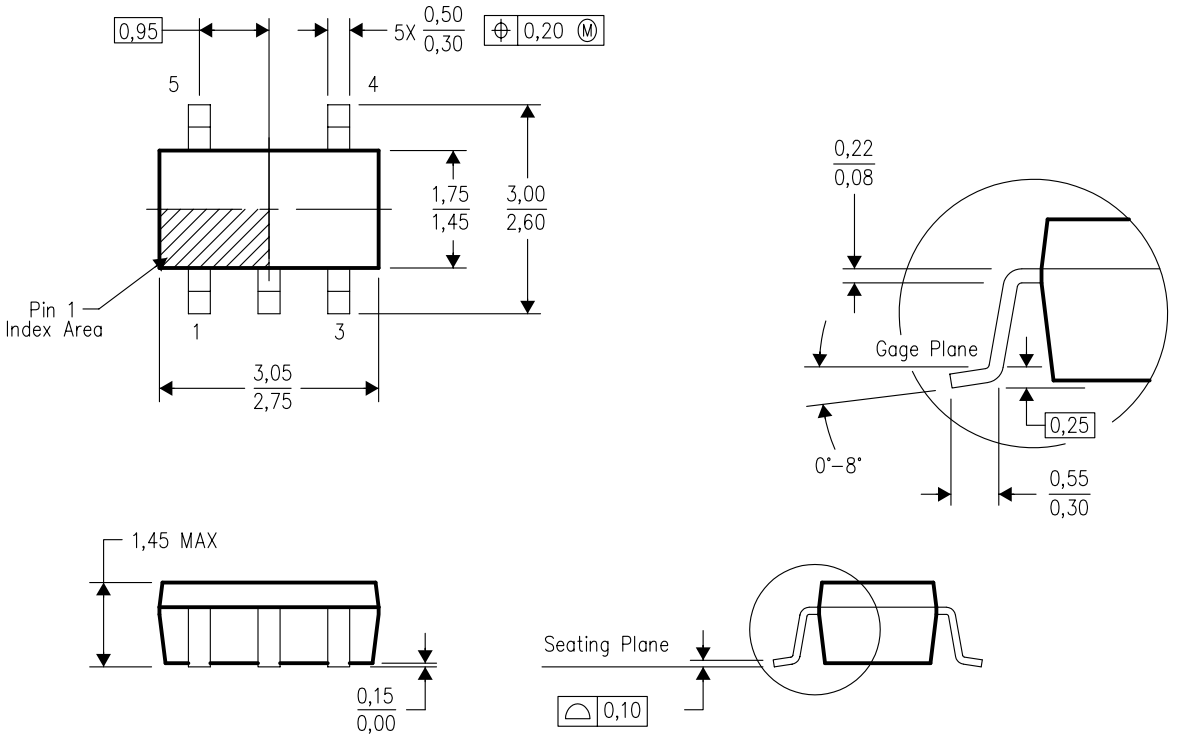

4073253–4/K 03/2006


NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
D. Falls within JEDEC MO–178 Variation AA.

DBV (R–PDSO–G5) PLASTIC SMALL OUTLINE

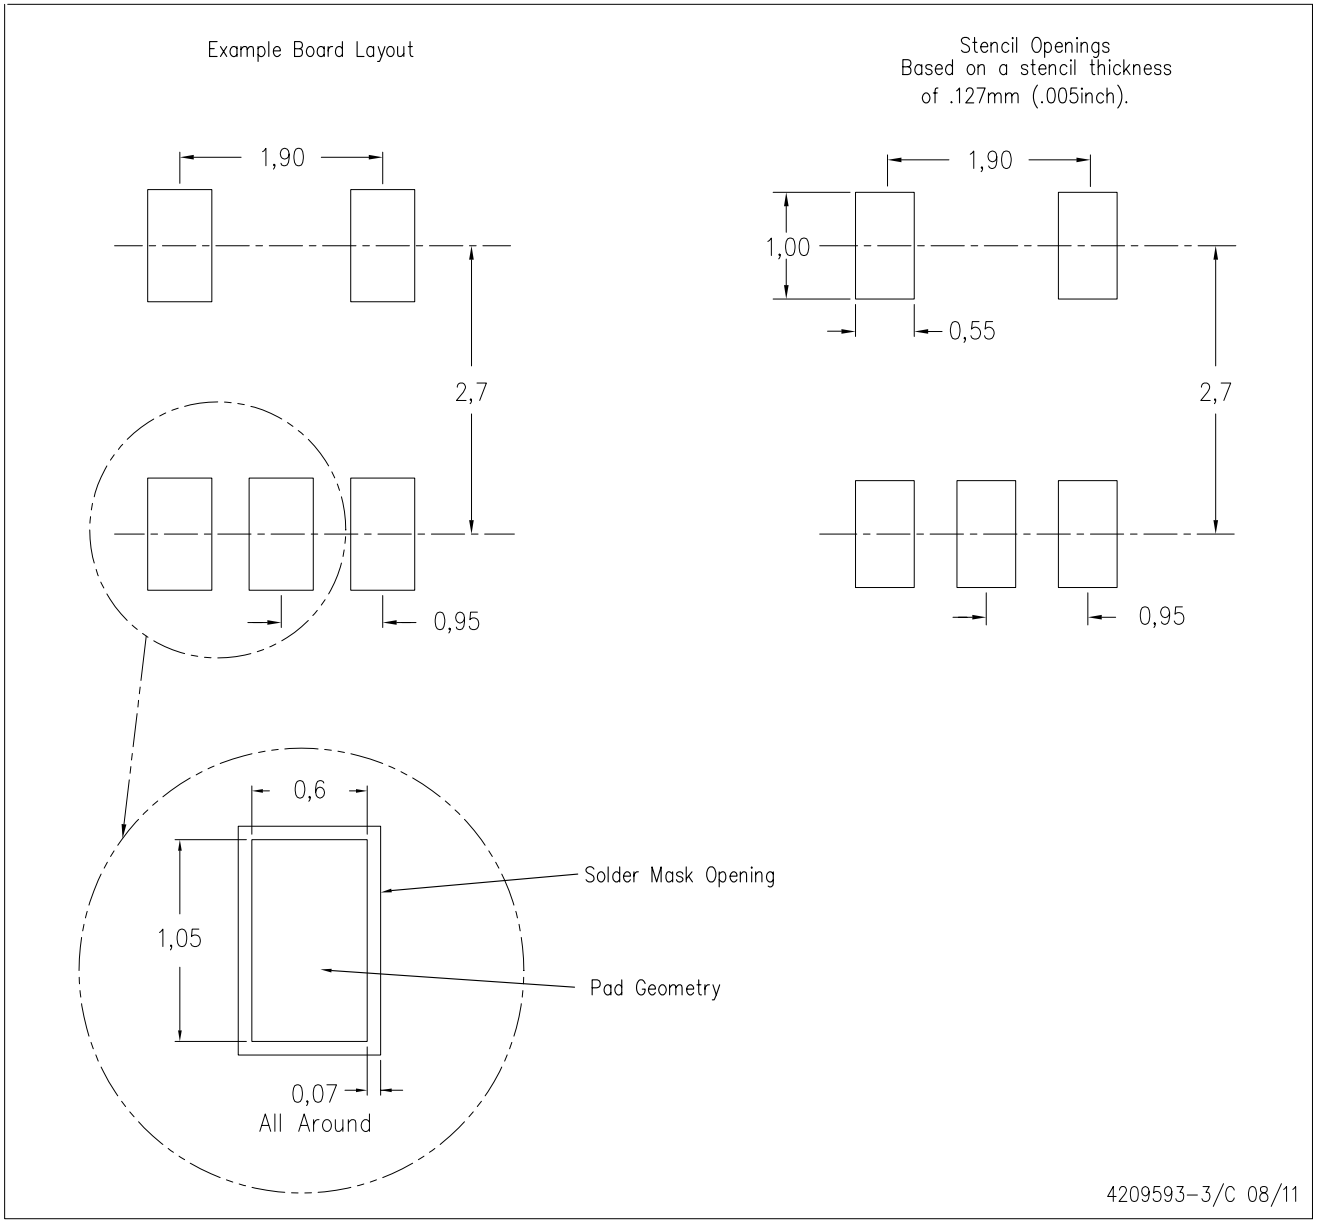

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
D. Publication IPC–7351 is recommended for alternate designs.
E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Example stencil design based on a 50% volumetric metal load solder paste. Refer to IPC–7525 for other stencil recommendations.


DCK (R–PDSO–G5) PLASTIC SMALL–OUTLINE PACKAGE

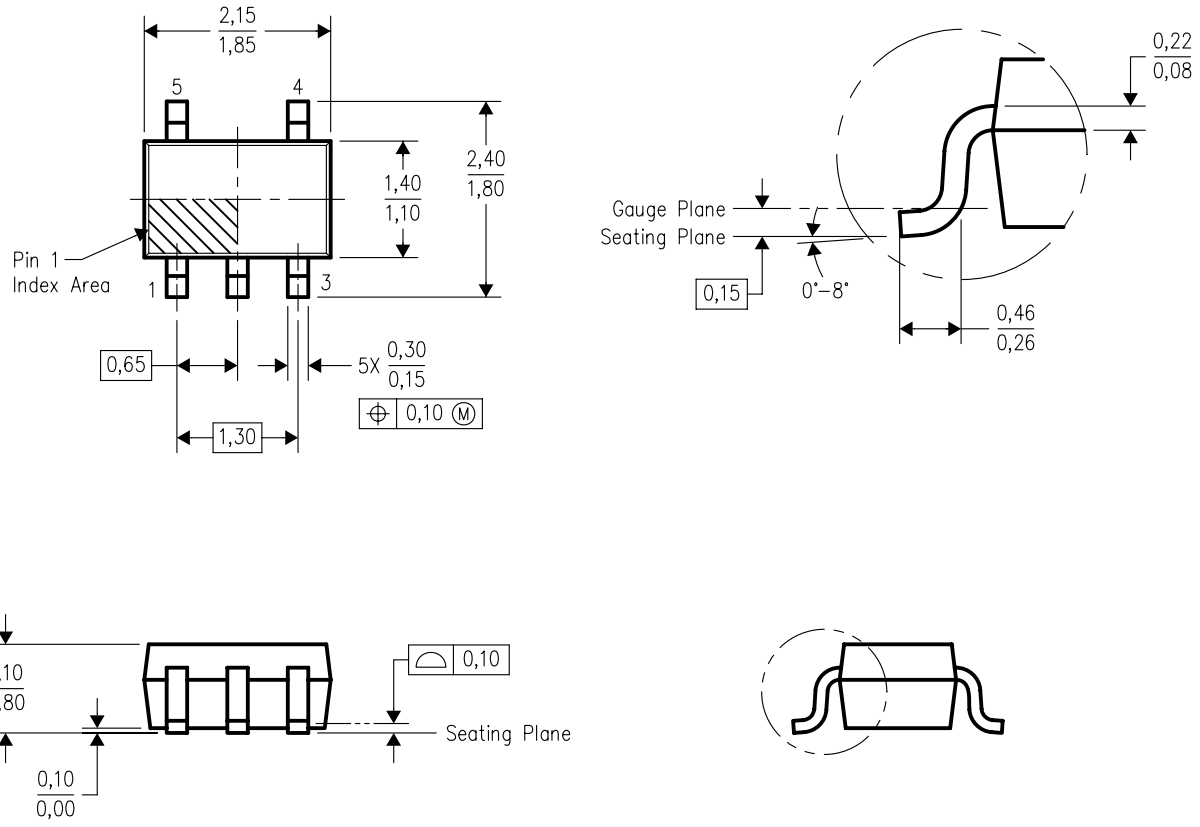

4093553–3/G 01/2007


NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
D. Falls within JEDEC MO–203 variation AA.

DCK (R–PDSO–G5) PLASTIC SMALL OUTLINE

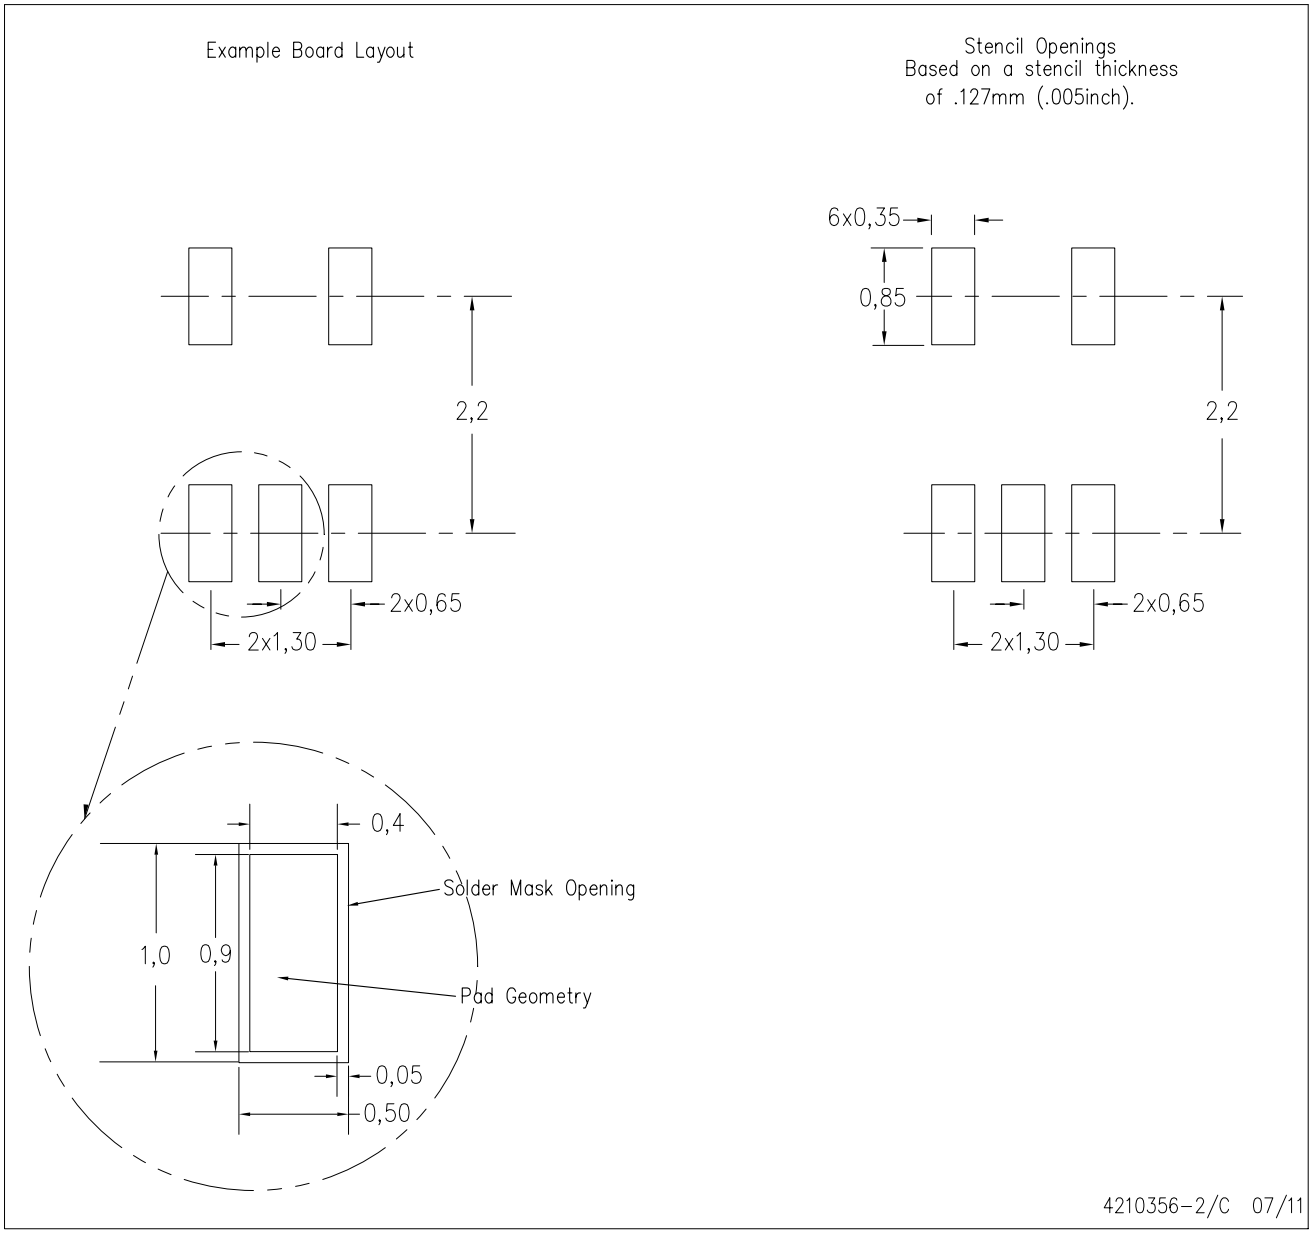

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
D. Publication IPC–7351 is recommended for alternate designs.
E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Example stencil design based on a 50% volumetric metal load solder paste. Refer to IPC–7525 for other stencil recommendations.


D (R–PDSO–G14) PLASTIC SMALL OUTLINE

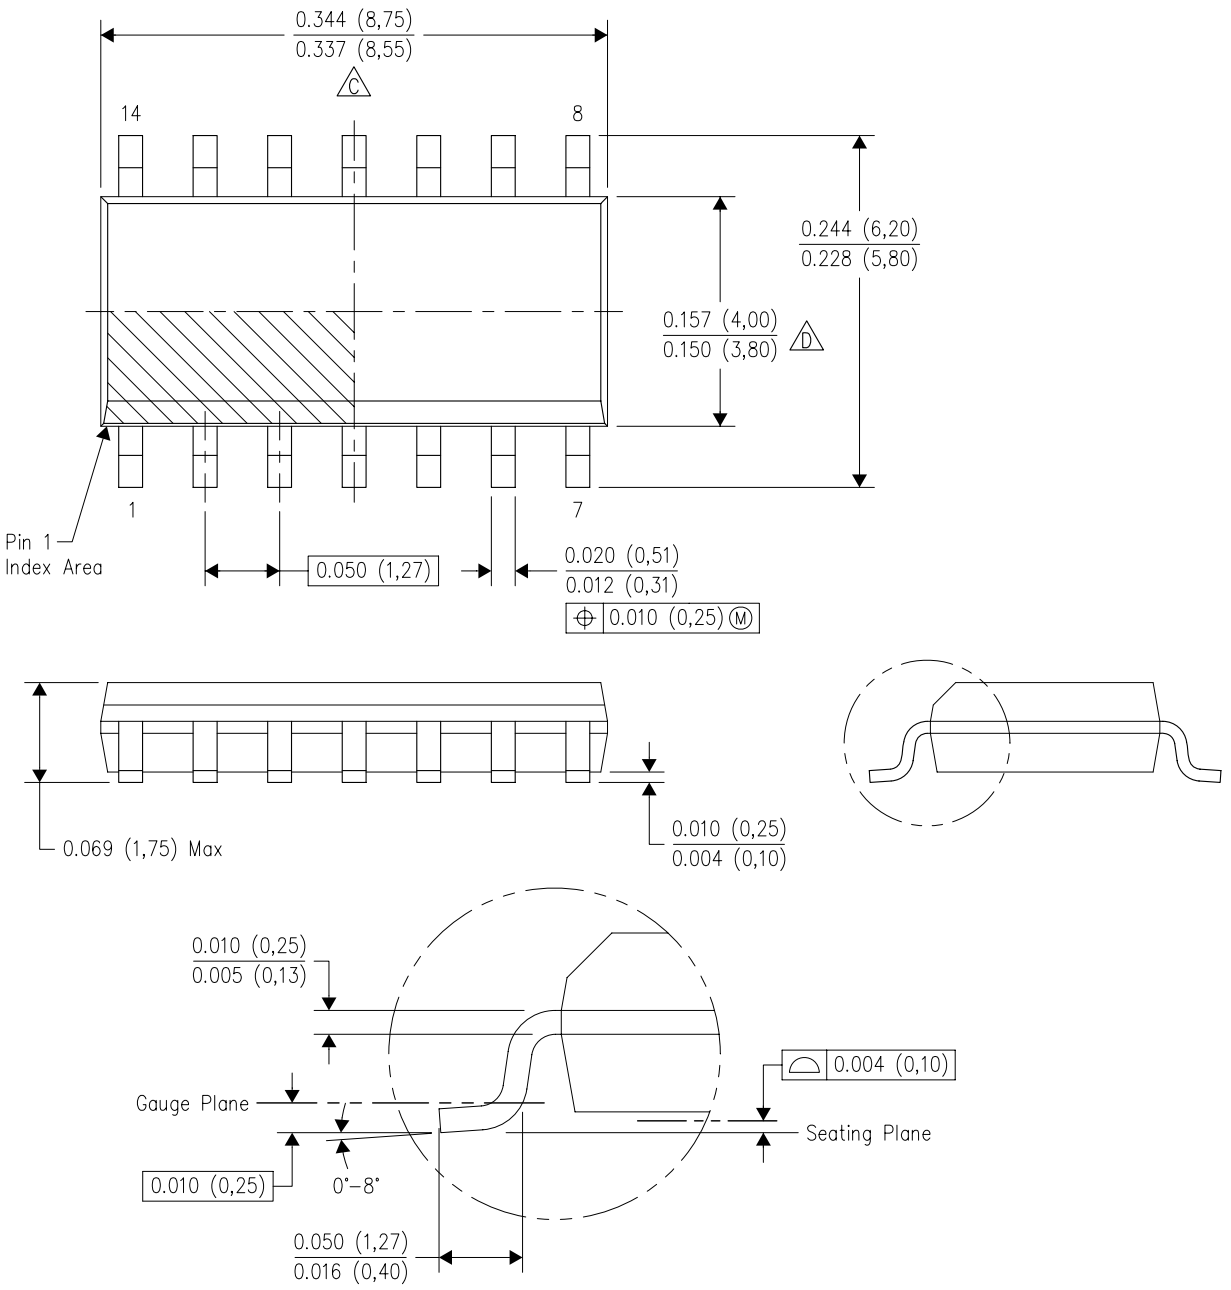

4040047–5/M 06/11


NOTES:
A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
E. Reference JEDEC MS–012 variation AB.

D (R–PDSO–G14) PLASTIC SMALL OUTLINE

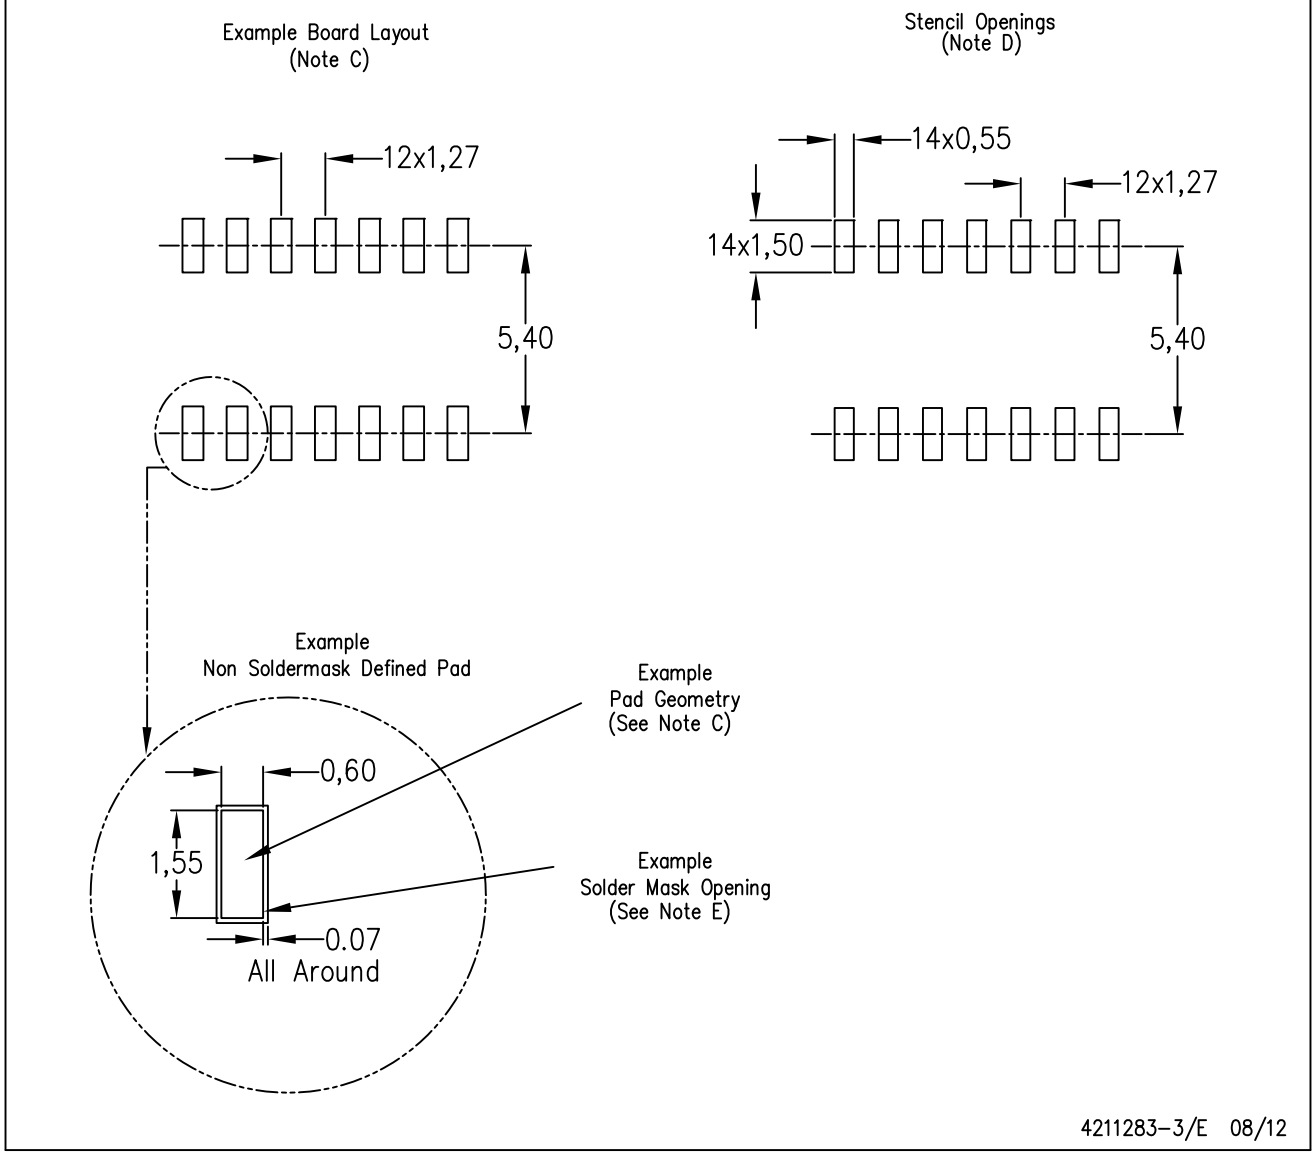

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Publication IPC–7351 is recommended for alternate designs.
D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC–7525 for other stencil recommendations.
E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.


PW (R–PDSO–G14) PLASTIC SMALL OUTLINE

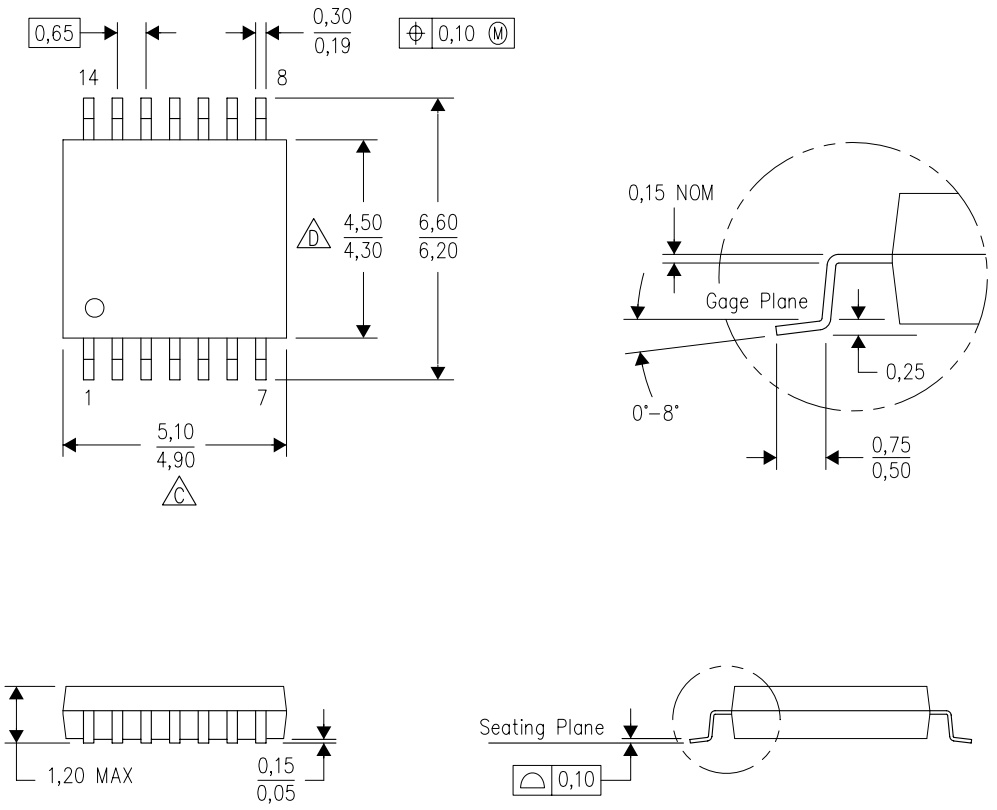

4040064–3/G 02/11


NOTES:
A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M–1994.
B. This drawing is subject to change without notice.
C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
D. Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
E. Falls within JEDEC MO–153

PW (R–PDSO–G14) PLASTIC SMALL OUTLINE

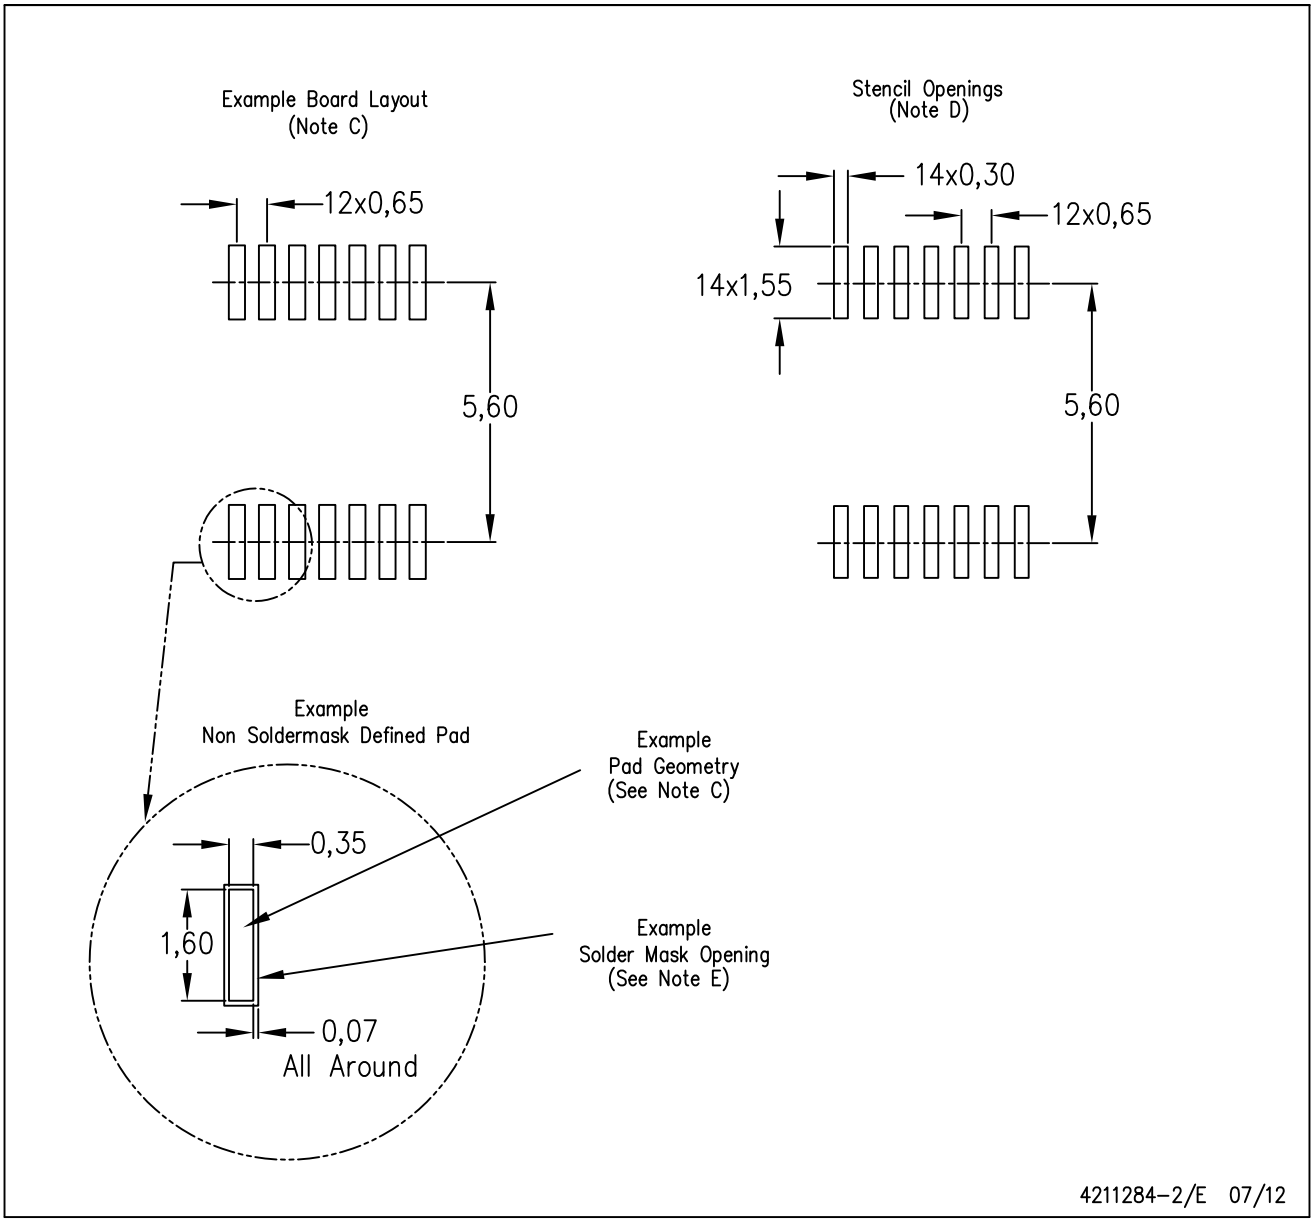


NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Publication IPC–7351 is recommended for alternate designs.
D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC–7525 for other stencil recommendations.
E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

D (R–PDSO–G8) PLASTIC SMALL OUTLINE

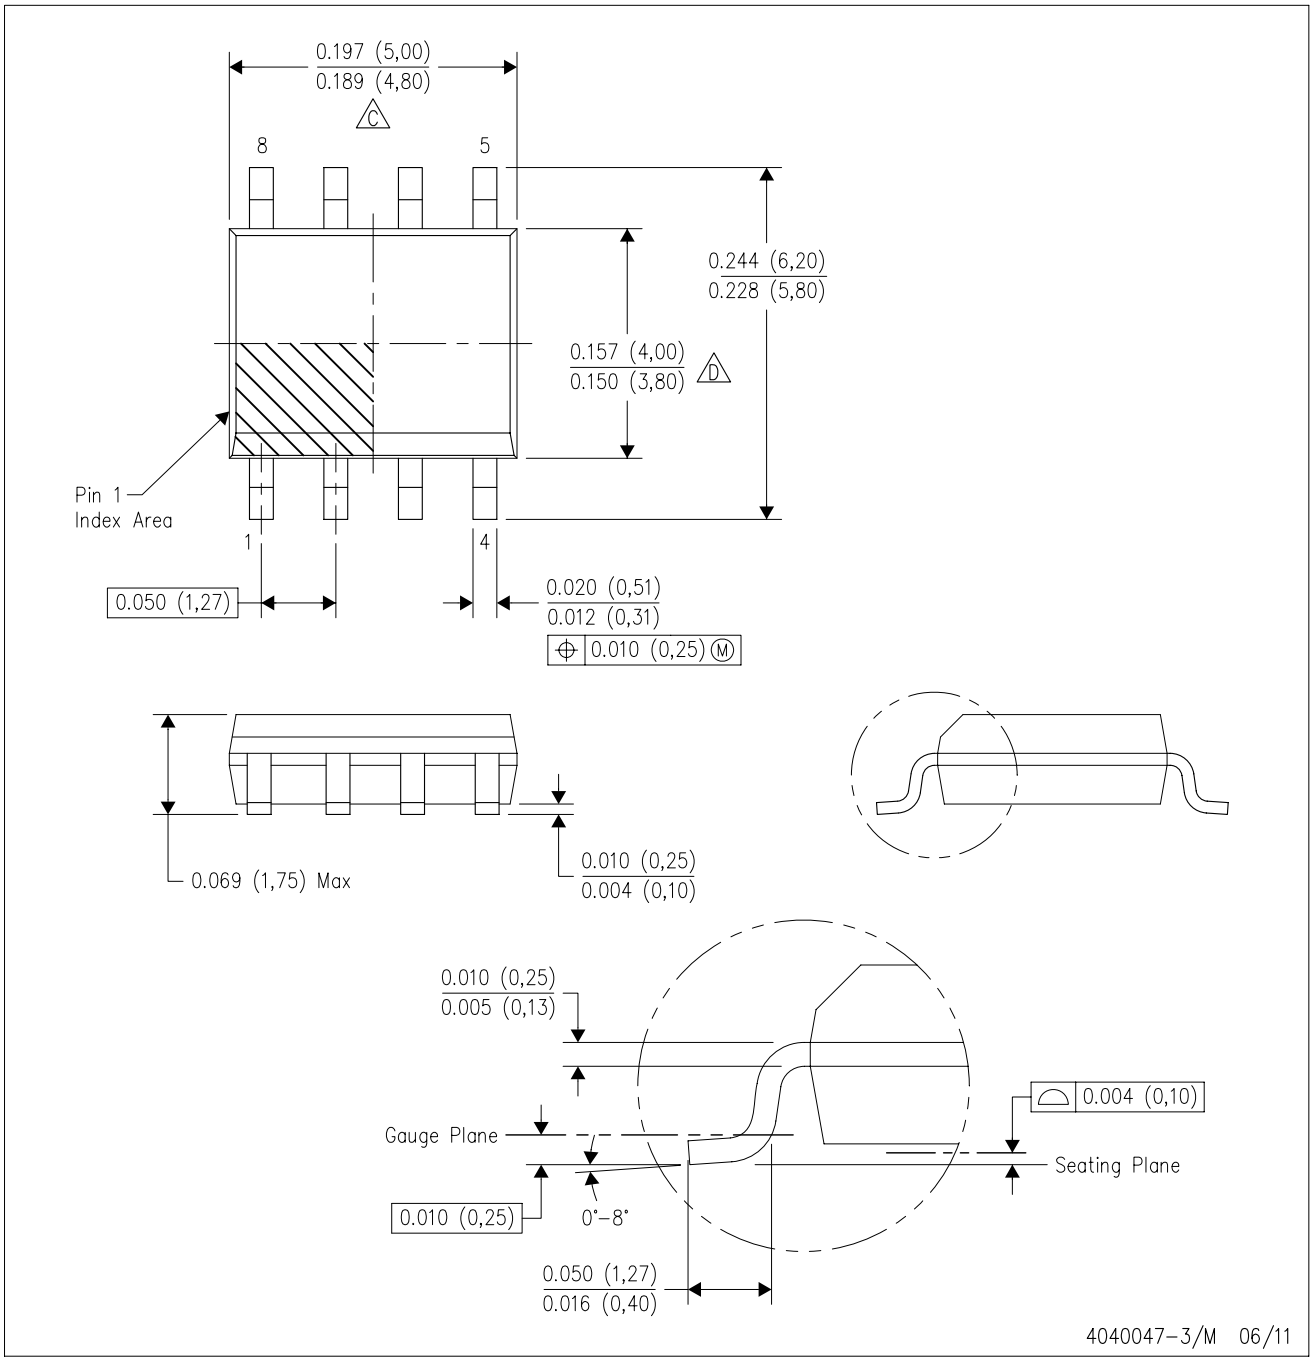

NOTES:
A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
E. Reference JEDEC MS–012 variation AA.

D (R–PDSO–G8) PLASTIC SMALL OUTLINE

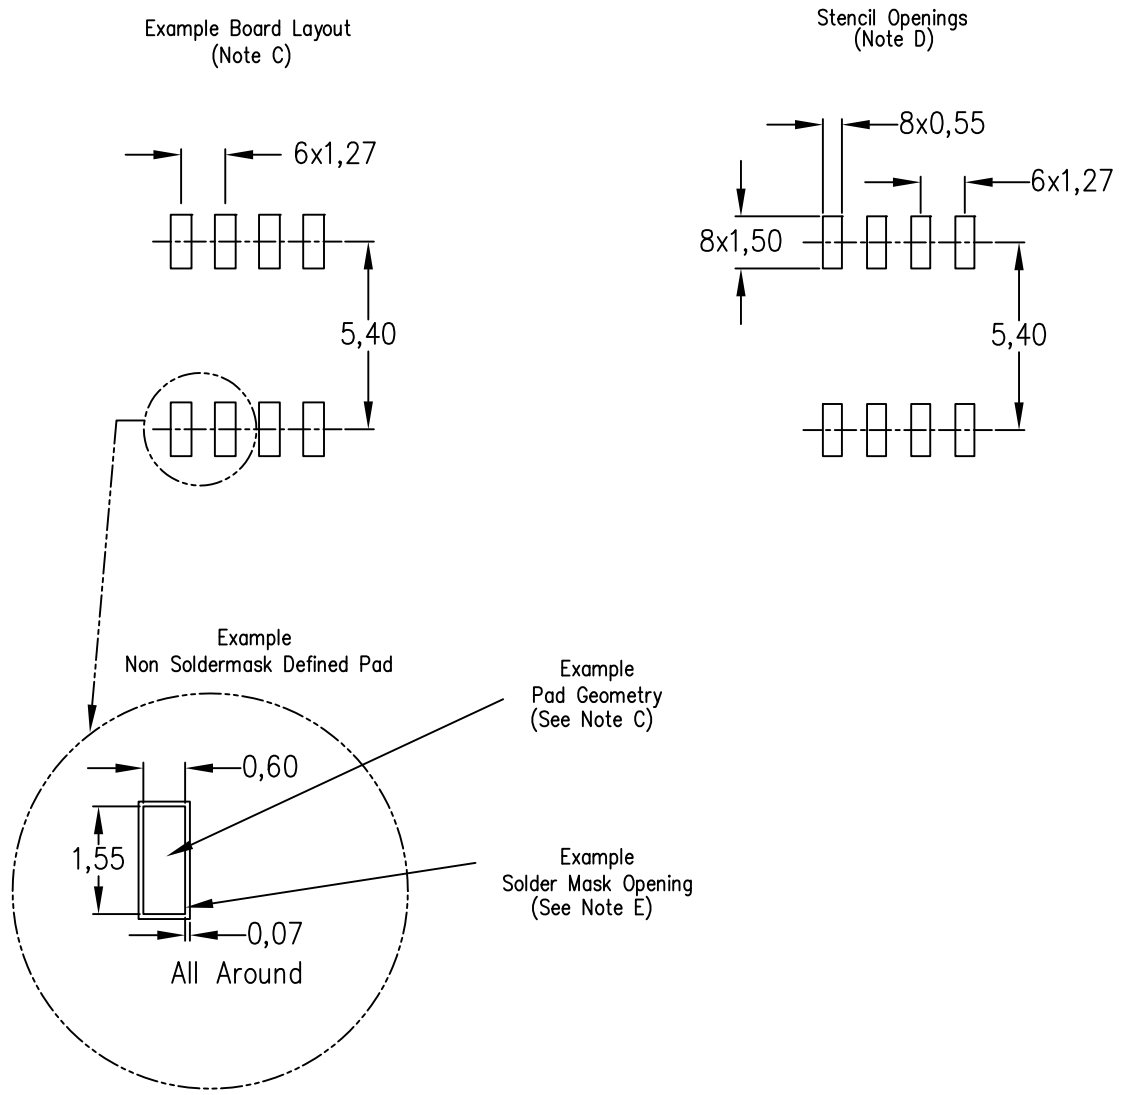

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Publication IPC–7351 is recommended for alternate designs.
D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC–7525 for other stencil recommendations.
E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as “components”) are sold subject to TI’s terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI’s terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers’ products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers’ products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI’s goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or “enhanced plastic” are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have ***not*** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components which meet ISO/TS16949 requirements, mainly for automotive use. Components which have not been so designated are neither designed nor intended for automotive use; and TI will not be responsible for any failure of such components to meet such requirements.

Products		**Applications**	
Audio	www.ti.com/audio	Automotive and Transportation	www.ti.com/automotive
Amplifiers	amplifier.ti.com	Communications and Telecom	www.ti.com/communications
Data Converters	dataconverter.ti.com	Computers and Peripherals	www.ti.com/computers
DLP® Products	www.dlp.com	Consumer Electronics	www.ti.com/consumer-apps
DSP	dsp.ti.com	Energy and Lighting	www.ti.com/energy
Clocks and Timers	www.ti.com/clocks	Industrial	www.ti.com/industrial
Interface	interface.ti.com	Medical	www.ti.com/medical
Logic	logic.ti.com	Security	www.ti.com/security
Power Mgmt	power.ti.com	Space, Avionics and Defense	www.ti.com/space-avionics-defense
Microcontrollers	microcontroller.ti.com	Video and Imaging	www.ti.com/video
RFID	www.ti-rfid.com		
OMAP Applications Processors	www.ti.com/omap	**TI E2E Community**	e2e.ti.com
Wireless Connectivity	www.ti.com/wirelessconnectivity		

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2012, Texas Instruments Incorporated