


LPT60B99 series



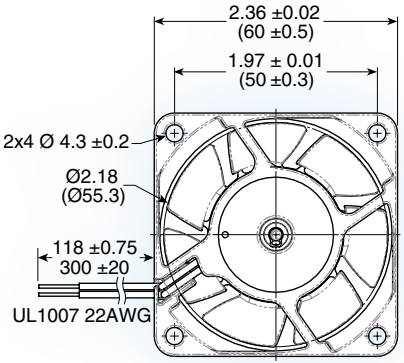

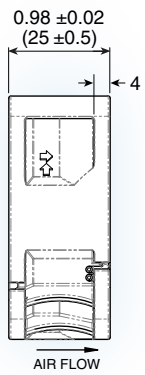

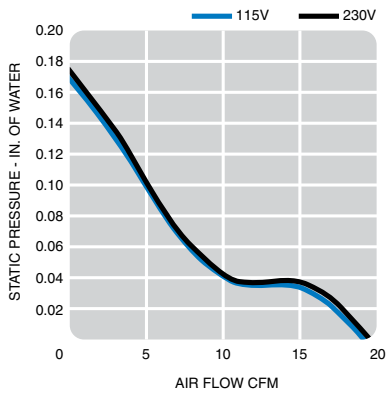

(60 x 60 x 25 mm)

2.36 x 2.36 x 0.98 inches

Operating voltage:	115 or 230 VAC
Construction:	plastic frame and metal impeller
Bearing option:	ball bearing
Motor:	2 speed electronically com mutated
Air flow:	exhaust over struts
Connection:	lead wire UL1007 22AWG
Protection:	thermal
Options:	• IP68 • ATEX

Model No.	Rated Voltage	Freq.	Input Power	Rated Cur.	Speed	Air Volume		Max. Sta tic Pressure (H_2O)		Sound Noise	Wt.
	V	HZ	W	A	RPM	M^3/Min.	CFM	MM	INCH	dbA	g
LPT60B99	115	50/60	2.4	0.041	3,850	0.541	19.1	4.32	0.17	31	60
	230	50/60	2.4	0.026	3,950	0.543	19.4	4.57	0.18	31	60