
SIGN	DATE	DESCRIPTION	APPROVER
1	11/12'08	螺絲孔加大由 2.10 變更為 2.20	Kind
2	11/12'08	Voltage rating changed from 125V AC to 150V AC	Kind
3	11/12'08	Wire changed from 20-30AWG to 18-30AWG	Kind
4	11/12'08	Withstanding voltage changed from 1.25KV to 1.3KV	Kind
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			





N = Number of poles

Dim A=N×2.54+0.4


Dim B=(N-1)×2.54


	Dim A	Dim B
2-6p	±0.15	±0.10
7-12p	±0.20	±0.20
13-18p	±0.30	±0.25
19-24p	±0.40	±0.30

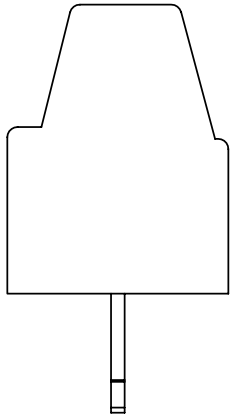

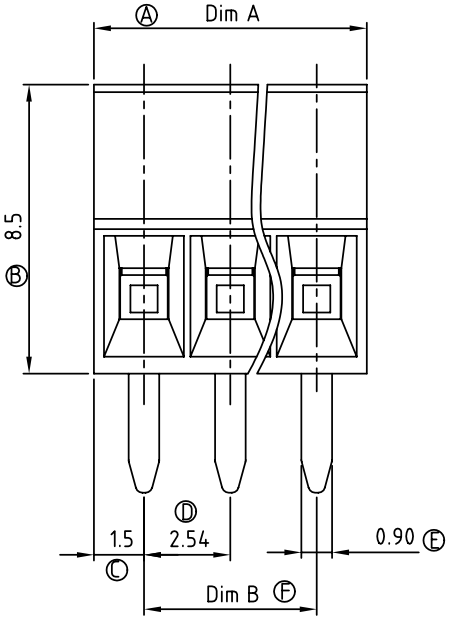

N=Number of contacts

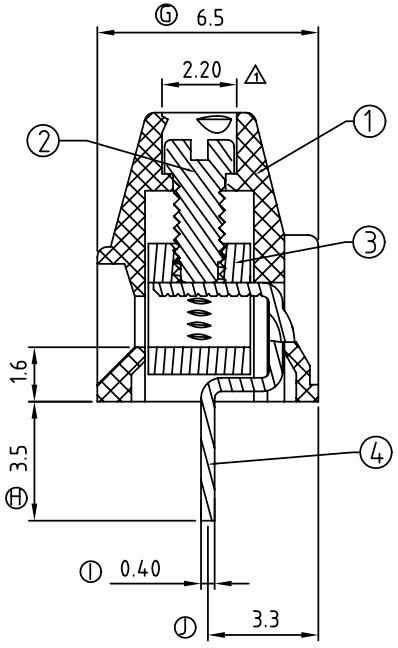

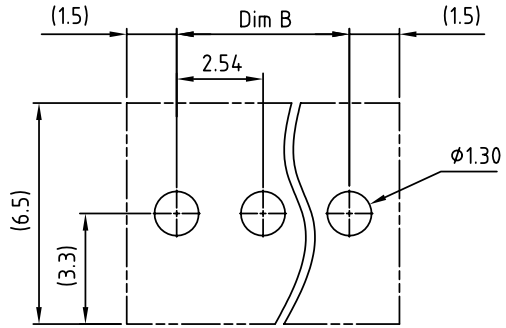

P.C.B. LAYOUT

Material

- Item 1 Terminal housing :PA66 (UL94V-0)
- Item 2 Terminal screw : Steel Zinc plating "-" slot type
- Item 3 Clamp : Brass, Ni plated
- Item 4 Wire guard solder pin (entry) : Brass, Tin plated

Electrical cULus

- 2 Voltage rating: 150VAC
- Current rating: 6A
- Wire range:
- 3 Solid wire(AWG): 18-30
- 3 Stranded wire(AWG): 18-30
- Torque: 1.3Lb-In
- Screw: M1.6
- Wire strip length: 4-5mm
- 4 Withstanding Voltage: 1.3KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: c UL us

VN xx A 1 x 0 xxxx G

xx		x	xxxx		G	
02	2 CONTACTS	0	Black	0000	"@"Logo	Pb < 40,000ppm (RoHS)
03	3 CONTACTS	5	Green (RAL 6018/T)	000A	"ANYTEK"Logo	
...	...	6	Blue	Any special item by customer request, please contact sales department.		
24	24 CONTACTS	8	Grey (RAL7035/D)			

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	VN 2.54mm Series				
PART NO.	VNxxA1x0xxxxG			DWG NO.	8VN0001
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Kind 2008.11.12	Kind 2008.11.12	UNIT: mm / SCALE: NONE / SHEET: 01/01 / REV.: E	

Tolerance	
X.	±0.50
X.X	±0.30
X.XX	±0.10
X°	±1°