


Heyco-Flex™ II Liquid Tight Tubing

Flexible, Nonmetallic Liquid Tight Electrical Tubing

TRADE SIZE	PART NO. Black	DESCRIPTION	PART DIMENSIONS A Outside Diameter in.	A Outside Diameter mm.	B Inside Diameter in.	B Inside Diameter mm.	STANDARD COIL LENGTH ft/coil
1/4	**8449**	HF2 1/4	.57	14,4	.40	10,0	100
3/8	**8450**	HF2 3/8	.70	17,8	.49	12,5	
1/2	**8451**	HF2 1/2	.83	21,1	.63	16,1	
3/4	**8452**	HF2 3/4	1.04	26,4	.83	21,1	
1	**8453**	HF2 1	1.30	33,1	1.05	26,8	
1-1/4	**8454**	HF2 1-1/4	1.65	41,8	1.40	35,4	
1-1/2	**8455**	HF2 1-1/2	1.88	47,8	1.59	40,3	50
2	**8456**	HF2 2	2.36	59,9	2.03	51,6	

Standard color black.
Consult Heyco for Cut to Length Availability.

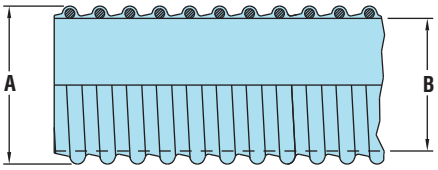





- Maximum flexibility; can be used in extremely tight quarters.
- Smooth inside for easier wire pulling.
- Lightweight and lower installed cost.
- Integral rigid and flexible PVC construction.
- Use with nylon Heyco-Flex Connectors: Straight, Snap-in, or Sweep. See pages 2-9 to 2-11.
- Also use with Quick Twist Fittings. See pages 2-13 and 2-14.
- 1/4″ thru 2″ trade sizes.
- Resists corrosion, oil, and water.
- UV resistant.
- Suitable for use in high vibration or flexing applications:
  - Automotive Equipment
  - Computers and Peripherals
  - Fiber Optics
  - Lab Equipment
  - Lasers
  - Office Equipment
  - Processing Control and Monitoring Equipment
  - Robotics
  - White Goods
- Passes submersion test of 70 psi.
- **Voltage Rating: 300V**.
- **Mounting brackets are available, see page 2-19.**
- **Order Part No. 8340**, HF-28 Cutting Tool, for cutting Heyco-Flex tubing and conduit cleanly and evenly.

Material	PVC
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E121095
	Certified by Canadian Standards Association File 233010
Flammability Rating	VW1
Temperature Range	-.4°F (-18°C) to 158°F (70°C)

Quick Specs