

SPRING & BUTTON CONTACTS

Economical and reliable contacts are ideal for molded cases with self contained battery compartments
 "Solder tab" design for either wire lead or PC mounting
 Unique spring contacts adjust to variations in battery lengths
 Reliable spring contacts assure low contact resistance and a dependable connection
 Space saving, economical, excellent mechanical construction

MATERIAL:


Plate: .020 (.51) Steel, Nickel Plate **Spring:** Spring Steel, Nickel Plate




Refer to page 37 for Battery Contact Layout & Mounting Details

"C" CELL - "26650"

(+) POSITIVE BUTTON



(-) NEGATIVE SPRING

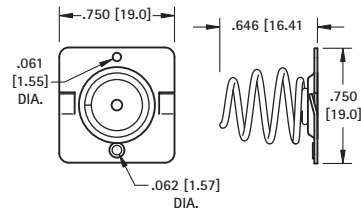


CAT. NO. 5240

CAT. NO. 5241

"C" CELL


DUAL CONTACT

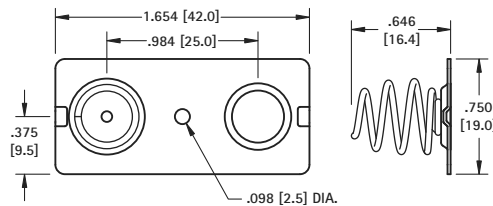


CAT. NO. 5242

"D" CELL

(+) POSITIVE BUTTON

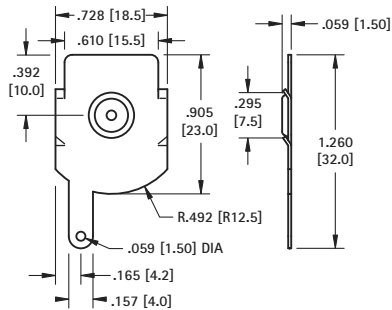


(-) NEGATIVE SPRING

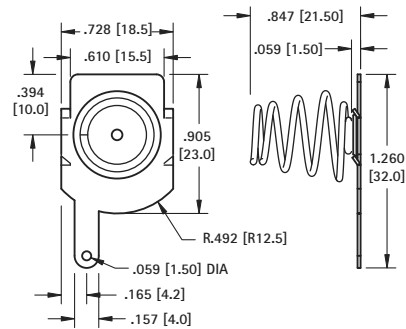

CAT. NO. 5250

CAT. NO. 5251

DUAL CONTACT

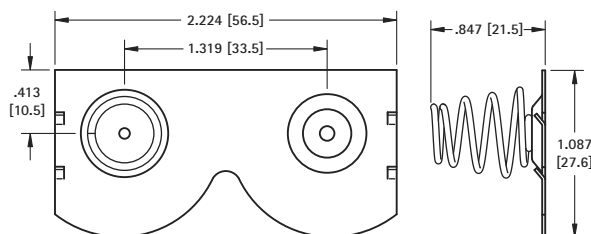

CAT. NO. 5253 Left

CAT. NO. 5252 Right (Shown)