

DENSI-PAK® BATTERY HOLDERS

Supports high density packaging on or off board,
positions anywhere for easy access to batteries
Economical design
Batteries securely held in place to assure a positive connection
and maintain a low contact resistance
Contact springs self-adjust to variations in battery length
Snap-on cover protects and secures batteries
Withstands shock and vibration

SPECIFICATIONS

Holder: ABS


Springs: Spring Steel, Nickel Plate

Wires (Red & Black): 6.0 (150) long, #26 AWG, Tinned, .187 (4.8) end strip UL/CSA1007




"AA"

Two (2) Cells - 3V

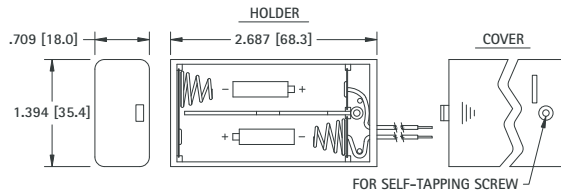

CAT. NO. 2490


Three (3) Cells - 4.5V

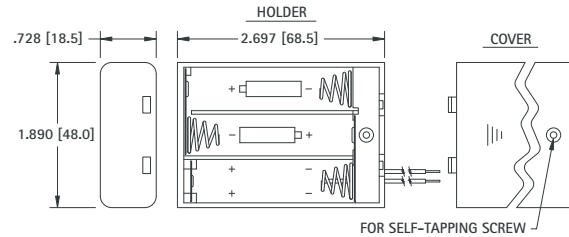

CAT. NO. 2487


"AAA"

Two (2) Cells - 3V

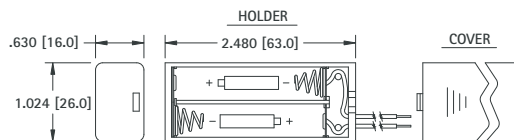

CAT. NO. 2489

Three (3) Cells - 4.5V

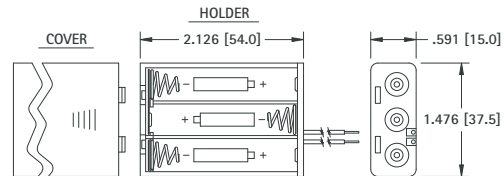

CAT. NO. 2484

PLASTIC BATTERY HOLDERS WITH SNAP-ON CONNECTORS

Features separable "snap-on/snap-off" battery connector (9 Volt type) to assure reliable connections

Economical design, holders available for two, three or four cells. Wired in series to accept connector (9 Volt type)

Easily disconnect battery holder from your device - no tools required

Batteries securely held in place to maintain a positive contact and a low contact resistance

Battery contact springs self adjust to variations in battery length
Withstands shock and vibration

Ideally mates with Keystone 9 Volt battery straps and connectors
(Refer to pages 28 - 29)

"AA"


SPECIFICATIONS

Holder: Polypropylene

Male/Female Contacts: Brass, Nickel Plate


Springs: Spring Steel, Nickel Plate

Two Cells - 3V

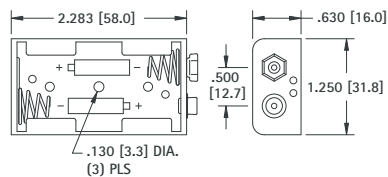


CAT. NO. 2474

Three (3) Cells - 4.5V

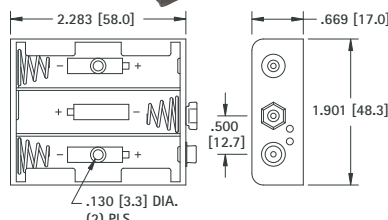

CAT. NO. 2475

Four (4) Cells - 6V

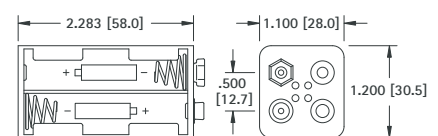

CAT. NO. 2476