




## QUICK-FIT FEMALES

### FEMALE NON-INSULATED



MATERIAL: Tinned Brass


Boot and Quick-Fit sold separately

| CAT. NO. | MATES WITH MALE TAB<br>WIDTH × THICK | L           | AWG SIZE | MAT'L THICK |
|----------|--------------------------------------|-------------|----------|-------------|
| 1252     | .110 (2.8) × .020 (.51)              | .640 (16.3) | 18-22    | .010 (.25)  |
| 1264     | .187 (4.8) × .020 (.51)              | .576 (14.6) | 16-22    | .013 (.33)  |
| 4469     | .205 (5.2) × .020 (.51)              | .640 (16.3) | 16-20    | .013 (.33)  |
| 4470     | .250 (6.4) × .032 (.81)              | .750 (19.1) | 16-20    | .016 (.41)  |

## VINYL BOOT

### For .250 (6.4) QUICK-FITS

- Easily slips over terminal
- Insulates and protects




| CAT. NO. | BOOT COLOR |
|----------|------------|
| 4471     | CLEAR      |
| 4472     | RED        |
| 4473     | BLUE       |

## SOLDERLESS QUICK-FIT TERMINALS


SPECIFICATIONS: Terminals: EPT Copper Insulation: Vinyl

### MALE NON-INSULATED




| CAT. NO. | WIRE RANGE (AWG) | FIG. | MALE TAB<br>WIDTH × THICK | L          | BARREL<br>LENGTH I.D. |
|----------|------------------|------|---------------------------|------------|-----------------------|
| 8281     | 22/18            | 2    | .187 (4.8) × .020 (.51)   | .64 (16.3) | .24 (6.3) .080 (2.03) |
| 8282     | (Red)            | 1    | .250 (6.4) × .032 (.81)   | .73 (18.5) | .25 (6.4) .065 (1.65) |
| 8283     | 16/14            | 2    | .187 (4.8) × .020 (.51)   | .64 (16.3) | .24 (6.3) .080 (2.03) |
| 8284     | (Blue)           | 1    | .250 (6.4) × .032 (.81)   | .73 (18.5) | .25 (6.4) .085 (2.16) |
| 8285     | 12/10            | 1    | .250 (6.4) × .032 (.81)   | .75 (19.1) | .25 (6.4) .150 (3.8)  |

### FEMALE NON-INSULATED




| CAT. NO. | WIRE RANGE (AWG) | MATES WITH MALE TAB<br>WIDTH × THICK | L          | BARREL<br>.250 (6.4) I.D. |
|----------|------------------|--------------------------------------|------------|---------------------------|
| 8272     | 22/18            | .187 (4.8) × .020 (.51)              | .58 (14.7) | .085 (2.16)               |
| 8273     | (Red)            | .250 (6.4) × .032 (.81)              | .66 (16.8) | .080 (2.03)               |
| 8274     | 16/14            | .187 (4.8) × .020 (.51)              | .58 (14.7) | .085 (2.16)               |
| 8275     | (Blue)           | .250 (6.4) × .032 (.81)              | .66 (16.8) | .080 (2.03)               |

### MALE VINYL INSULATED





| CAT. NO. | WIRE RANGE (AWG) | MALE TAB<br>WIDTH × THICK | L           | BARREL<br>LENGTH I.D. | MAX INSULATION<br>DIAMETER |
|----------|------------------|---------------------------|-------------|-----------------------|----------------------------|
| 8286     | 22/18            | .187 (4.8) × .020 (.51)   | .85 (21.6)  | .24 (6.3) .080 (2.03) | .145 (3.7)                 |
| 8287     | (Red)            | .250 (6.4) × .032 (.81)   | .93 (23.6)  | .25 (6.4) .065 (1.65) | .145 (3.7)                 |
| 8288     | 16/14            | .187 (4.8) × .020 (.51)   | .85 (21.6)  | .24 (6.3) .080 (2.03) | .145 (3.7)                 |
| 8289     | (Blue)           | .250 (6.4) × .032 (.81)   | .93 (23.6)  | .25 (6.4) .085 (2.16) | .170 (4.3)                 |
| 8290     | 12/10 (Yellow)   | .250 (6.4) × .032 (.81)   | 1.05 (26.7) | .25 (6.4) .150 (3.8)  | .250 (6.4)                 |

### FEMALE VINYL INSULATED




| CAT. NO. | WIRE RANGE (AWG) | MATES WITH MALE TAB<br>WIDTH × THICK | L          | BARREL<br>.250 (6.4) I.D. | MAX INSULATION<br>DIAMETER |
|----------|------------------|--------------------------------------|------------|---------------------------|----------------------------|
| 8276     | 22/18            | .187 (4.8) × .020 (.51)              | .78 (19.8) | .085 (2.16)               | .145 (3.7)                 |
| 8277     | (Red)            | .250 (6.4) × .032 (.81)              | .87 (22.1) | .080 (2.03)               | .145 (3.7)                 |
| 8278     | 16/14            | .187 (4.8) × .020 (.51)              | .78 (19.8) | .085 (2.16)               | .145 (3.7)                 |
| 8279     | (Blue)           | .250 (6.4) × .032 (.81)              | .87 (22.1) | .080 (2.03)               | .145 (3.7)                 |
| 8280     | 12/10 (Yellow)   | .250 (6.4) × .032 (.81)              | .96 (24.4) | .165 (4.2)                | .250 (6.4)                 |

### MALE FULLY INSULATED NYLON

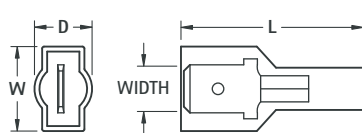

| CAT. NO. | WIRE RANGE (AWG) | MALE TAB<br>WIDTH × THICK | L           | W          | D         | BARREL<br>.250 (6.4) LENGTH I.D. | MAX. INSUL. DIA. |
|----------|------------------|---------------------------|-------------|------------|-----------|----------------------------------|------------------|
| 8296     | 22/18            | .187 (4.8) × .020 (.51)   | .87 (22.1)  | .37 (9.4)  | .30 (7.6) | .24 (6.3) .080 (2.03)            | .145 (3.7)       |
| 8297     | (Red)            | .250 (6.4) × .032 (.81)   | .95 (24.1)  | .44 (11.2) | .30 (7.6) | .25 (6.4) .065 (1.65)            | .145 (3.7)       |
| 8298     | 16/14            | .187 (4.8) × .020 (.51)   | .87 (22.1)  | .37 (9.4)  | .30 (7.6) | .24 (6.3) .080 (2.03)            | .170 (4.3)       |
| 8299     | (Blue)           | .250 (6.4) × .032 (.81)   | .95 (24.1)  | .44 (11.2) | .30 (7.6) | .25 (6.4) .085 (2.16)            | .170 (4.3)       |
| 8300     | 12/10 (Yellow)   | .250 (6.4) × .032 (.81)   | 1.05 (26.7) | .47 (11.9) | .39 (9.9) | .25 (6.4) .150 (3.8)             | .250 (6.4)       |

### FEMALE FULLY INSULATED NYLON



| CAT. NO. | WIRE RANGE (AWG) | MATES WITH MALE TAB<br>WIDTH × THICK | L          | W         | D         | BARREL<br>.250 (6.4) I.D. | MAX. INSUL. DIA. |
|----------|------------------|--------------------------------------|------------|-----------|-----------|---------------------------|------------------|
| 8291     | 22/18            | .187 (4.8) × .020 (.51)              | .81 (20.6) | .30 (7.6) | .23 (5.8) | .085 (2.16)               | .145 (3.7)       |
| 8292     | (Red)            | .250 (6.4) × .032 (.81)              | .87 (22.1) | .37 (9.4) | .23 (5.8) | .080 (2.03)               | .145 (3.7)       |
| 8293     | 16/14            | .187 (4.8) × .020 (.51)              | .81 (20.6) | .30 (7.6) | .23 (5.8) | .085 (2.16)               | .145 (3.7)       |
| 8294     | (Blue)           | .250 (6.4) × .032 (.81)              | .87 (22.1) | .37 (9.4) | .23 (5.8) | .080 (2.03)               | .170 (4.3)       |
| 8295     | 12/10 (Yellow)   | .250 (6.4) × .032 (.81)              | .99 (25.1) | .39 (9.9) | .32 (8.1) | .165 (4.2)                | .250 (6.4)       |