

Features

- 55.6 dBm CW Power Handling @ +25°C
- 54 dBm CW Power Handling @ +85°C
- 0.2 dB Insertion Loss (400 - 500 MHz)
- 25 dB Return Loss (400 - 500 MHz)
- 21 dBm Flat Leakage Power
- Lead-Free 10.1 x 6.2 x 3.2 mm³ Package
- RoHS* Compliant
- Hermetic Seal that provides fine leak rate < 5x10⁻⁸ atm·cc/s.

Description & Applications


The MADL-011012 is a lead-free surface mount, high power limiter which integrates the equivalent of 20 PIN, Schottky, limiter diodes, capacitors, inductors, and resistors in a compact ceramic package. This device provides superior low and high signal performance from 0.3 - 1.0 GHz without DC bias.

The MADL-011012 is ideally suitable for higher peak and CW power receiver-protector microwave circuits applications where higher performance surface mount limiter assemblies are required.

Ordering Information

Part Number	Package
MADL-011012-001	bulk
MADL-011012-001SMB	Sample Test Board

Functional Schematic

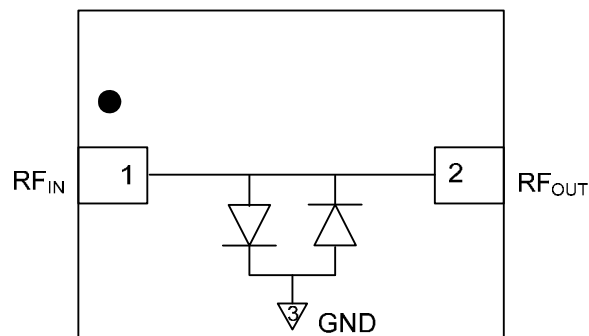

Top view

Pin Configuration

Pin #	Pin Name	Description
1	RF _{IN}	RF Input
2	RF _{OUT}	RF Output
3	Paddle ¹	Ground

1. The exposed paddle centered on the package bottom must be connected to RF, DC, and thermal ground.

* Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

Electrical Specifications: $T_A = +25^\circ\text{C}$, $Z_0 = 50\ \Omega$ (unless otherwise defined)

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Insertion Loss	-10 dBm, 300 MHz -10 dBm, 500 MHz -10 dBm, 1000 MHz	dB	—	0.25 0.20 0.55	— 0.35 —
Return Loss	10 dBm, 300 MHz -10 dBm, 500 MHz -10 dBm, 1000 MHz	dB	—	20 25 11	—
P1dB Input Compression Power	500 MHz	dBm	—	13	—
CW Incident Power ²	500 MHz	dBm	—	55.6	—
Peak Incident Power ²	1 ms pulse, 10% duty cycle, 500 MHz	dBm	—	55.6	—
Flat Leakage Power	1 ms pulse, 10% duty cycle, 500 MHz	dBm	—	20	—
Spike Leakage Power	+56 dBm, 1 ms pulse, 10% duty cycle, 500 MHz	dBm	—	29	—
Spike Leakage Energy	+56 dBm, 1 ms pulse, 10% duty cycle, 500 MHz	ergs	—	0.5	—
Recovery Time (3 dB of Insertion Loss)	+56 dBm, 1 ms pulse, 10% duty cycle, 500 MHz	μs	—	3	—
Input 3rd Order Intermodulation (IIP3)	-10 dBm, F1 = 500 MHz, F2 = 510 MHz	dBm	—	29	—

2. Incident power ratings defined with 1.2:1 source VSWR and 1.2:1 maximum load VSWR.

Maximum Operating Ratings³

Parameter	Operating Maximum
Peak Incident Power 2 ms pulse, 10% duty @ +85°C	55.6 dBm
CW Incident Power @ +85°C	54 dBm
Junction Temperature ⁵	175°C


- Exceeding any one or combination of these limits may cause permanent damage to this device.
- MACOM does not recommend sustained operation near these survivability limits.
- Operating at nominal conditions with $T_J \leq +175^\circ\text{C}$ will ensure MTTF > 1×10^6 hours.

Absolute Maximum Ratings^{3,4}


Parameter	Absolute Maximum
Peak Incident Power 1 ms pulse, 10% duty @ +85°C	57 dBm
Peak Incident Power 10 ms pulse, 35% duty @ +85°C	56 dBm
CW Incident Power @ +85°C	54 dBm
Operating Temperature	-65°C to +125°C
Storage Temperature	-65°C to +150°C

Typical Performance Curves


Insertion Loss vs. Frequency

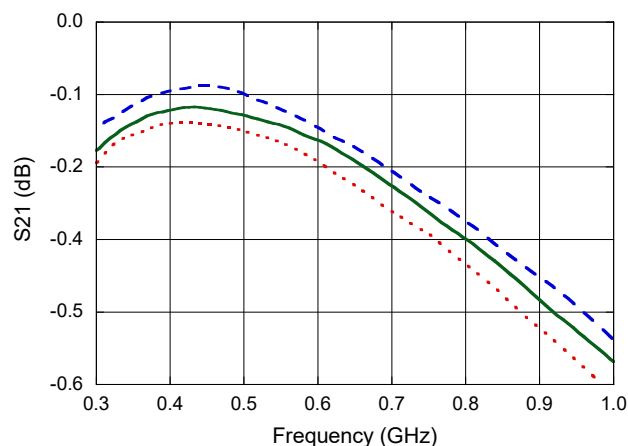


Input Return Loss vs. Frequency

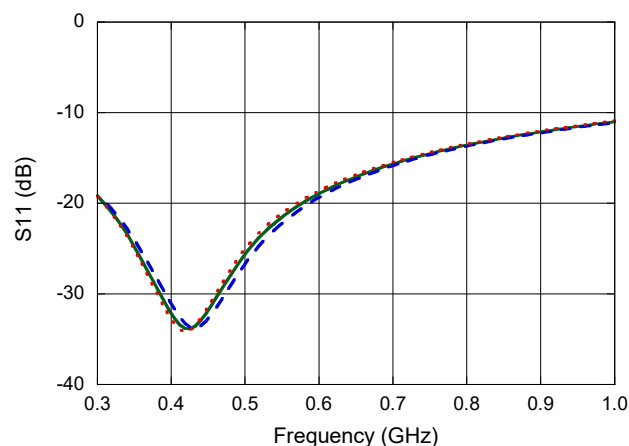


Pulsed Flat Leakage Power vs. P_{IN}
 (1 ms Pulse, 10% Duty Cycle, 500 MHz)

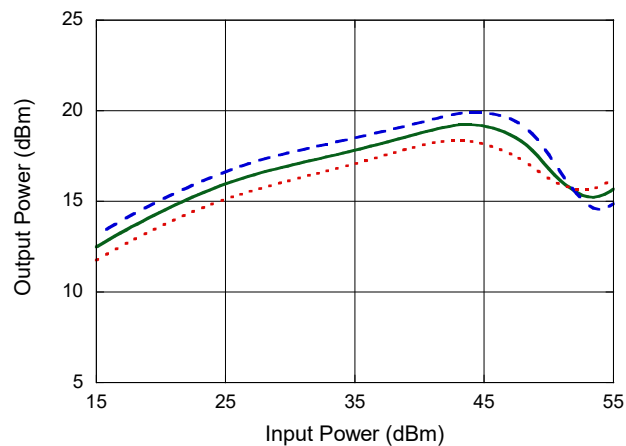


CW Flat Leakage Power vs. P_{IN} @ 500 MHz

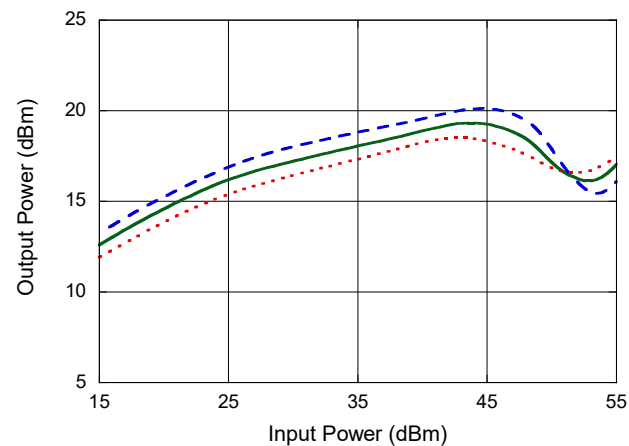

Pulsed Spike Leakage Power vs. P_{IN}
 (1 ms Pulse, 10% Duty Cycle, 500 MHz)

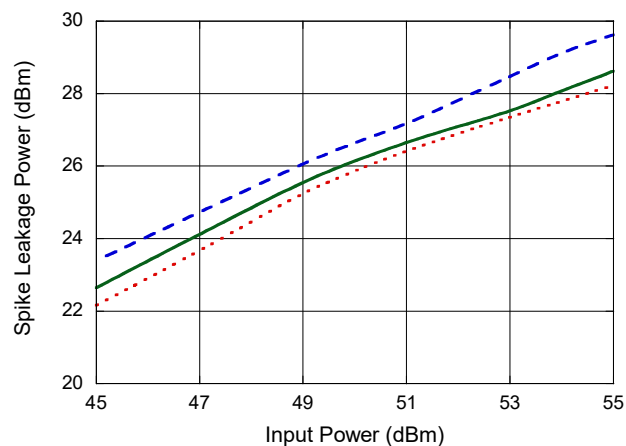

Pulsed 1 dB Recovery Time vs. P_{IN}
 (1 ms Pulse, 10% Duty Cycle, 500 MHz)

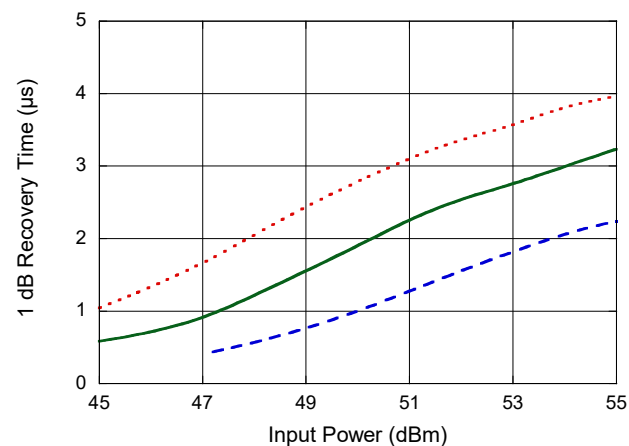


Power Limiter 360 W CW 0.3 - 1.0 GHz



MADL-011012
Rev. V2

SMB Layout

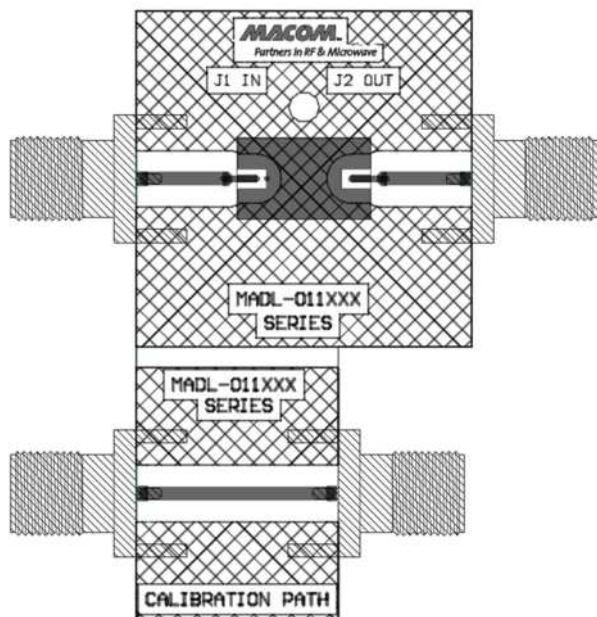

SMB Layout

Part	Part Number	Qty.
RF Connector	Johnson 142-0701-851	2
Limiter	MADL-011012	1


Handling Procedures

Please observe the following precautions to avoid damage:

Static Sensitivity

These devices are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these HBM Class 1B devices.


Lead-Free 10.1 x 6.2 x 3.2 mm³ 2-Lead package[†]

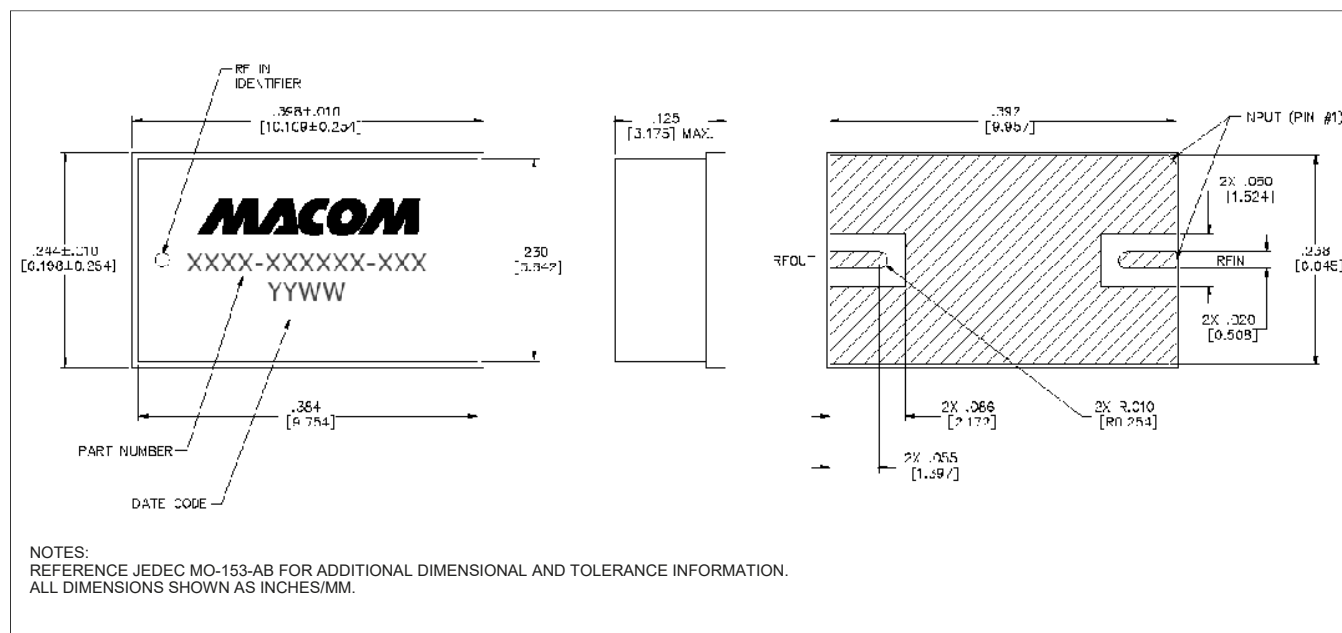

[†] Reference Application Note [S2083](#) for lead-free solder reflow recommendations.
Plating is Au over Ni over Cu.

Application Section

Transmit-Receive Block Diagram using the UHF Band MADL-011012 Limiter

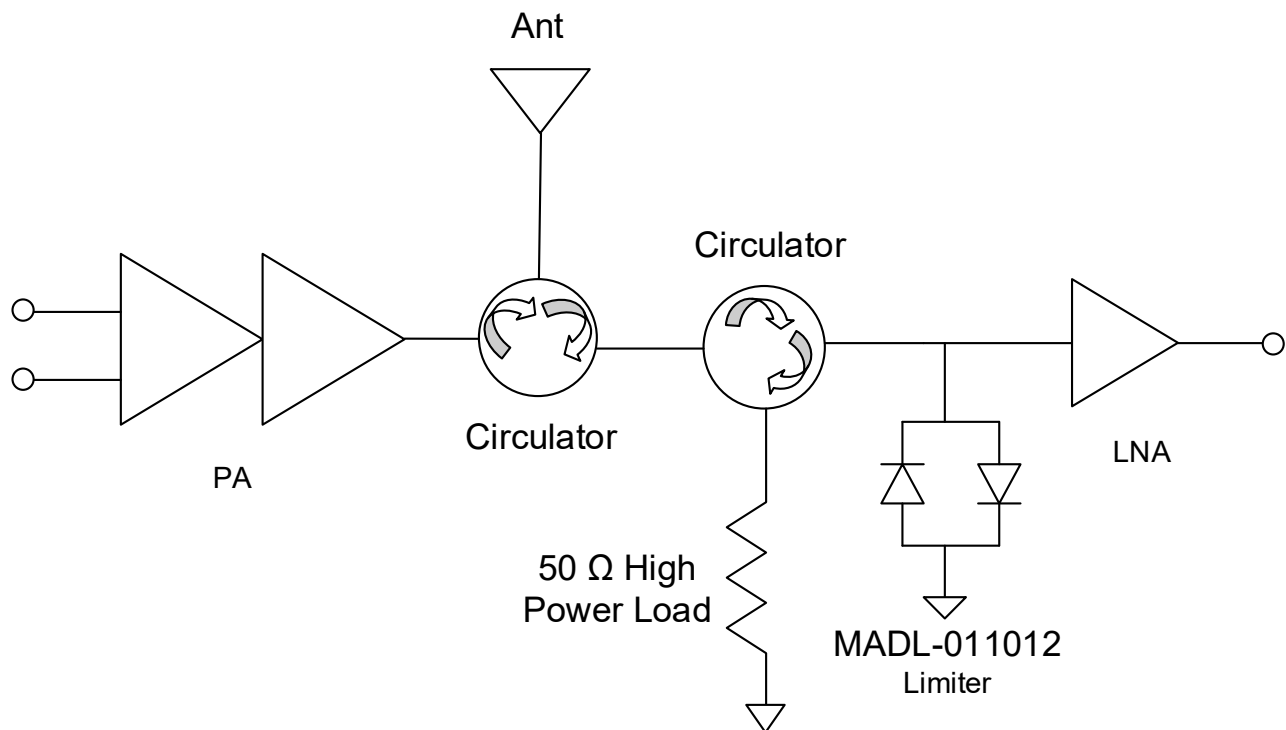

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.