

3 Way, 0° Power Divider 5 - 1200 MHz



MAPDCT0032

Rev. V7

Features

- 3 Way 0°
- Surface Mount Technology
- RoHS* Compliant
- Available on Tape & Reel


Applications

- CATV / Broadband

Description

The MAPDCT0032 is a 3 way 0 degree power divider in a low cost, surface mount package. Ideally suited for high volume CATV/Broadband applications. No external components are required with this product.

Block Diagram

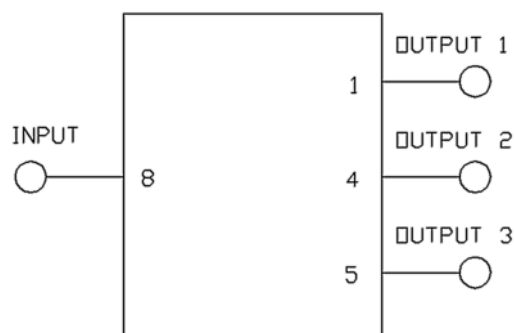

Pin Configuration

Pin #	Function
1	Output 1
2,3,6,7	Ground
4	Output 2
5	Output 3
8	Input

Ordering Information

Part Number	Package
MAPDCT0032	500 piece reel
MAPD-008112-CT32TB	Customer Test Board

3 Way, 0° Power Divider 5 - 1200 MHz



MAPDCT0032

Rev. V7

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 75\ \Omega$, $P_{IN} = 0\ \text{dBm}$

Parameter	Frequency (MHz)	Units	Min	Typ	Max
Insertion Loss 1 (pin 8 - pin 1) Ref value -4.77 dB	5 - 46 46 - 870 870 - 1002 1002 - 1200	dB	—	0.37 1.23 1.50 2.23	0.5 1.5 1.8 3.2
Insertion Loss 2 (pin 8 - pin 4) Ref value -4.77 dB	5 - 46 46 - 870 870 - 1002 1002 - 1200	dB	—	0.37 1.0 1.2 2.0	0.5 1.3 1.5 2.8
Insertion Loss 3 (pin 8 - pin 5) Ref value -4.77 dB	5 - 46 46 - 870 870 - 1002 1002 - 1200	dB	—	0.38 1.5 1.8 2.8	0.5 1.8 2.2 3.3
Input Return Loss	5 - 8 8 - 46 46 - 405 405 - 1002 1002 - 1200	dB	26 27 20 17.5 11	28 31 25 20 18	—
Output Return Loss 1 & 2 (pin 1, pin 4)	5 - 46 46 - 1200	dB	11 20	18 25	—
Output Return Loss 3 (pin 5)	5 - 46 46 - 740 740 - 1002 1002 - 1200	dB	11 20 17 14	18 20 25 18	—
Isolation Between all Outputs	5 - 46 46 - 1002 1002 - 1200	dB	18 20 18	28 25 24	—
Amplitude Unbalance, Output 1 to Output 2 (pin 1, 4)	5 - 46 46 - 1002	dB	—	0.0 0.3	-0.1 0.5
Amplitude Unbalance, Output 1 to Output 3 (pin 1, 5) & Output 2 to Output 3 (pin 4, 5)	5 - 46 46 - 1002	dB	—	-0.1 -0.3	-0.2 -0.5
Phase Unbalance between all Outputs	5 - 50 50 - 1200	°	—	0.4 3.0	0.5 4.0

Absolute Maximum Ratings^{1,2}

Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Operating & Storage Temperature	-40°C to +85°C

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- MACOM does not recommend sustained operation near these survivability limits.

3 Way, 0° Power Divider 5 - 1200 MHz




MAPDCT0032


Rev. V7

Typical Performance Curves³ @ $T_A = 25^\circ\text{C}$, $Z_0 = 75 \Omega$


Insertion Loss

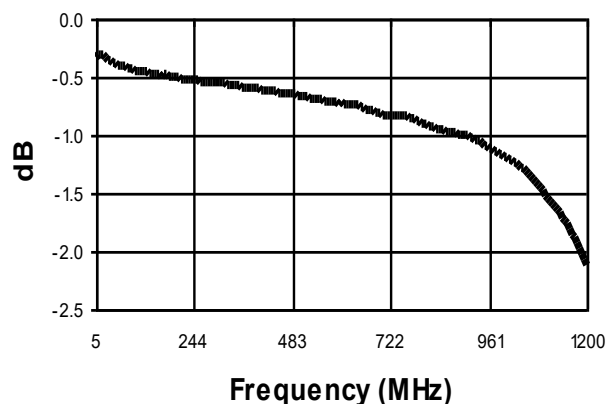


Isolation

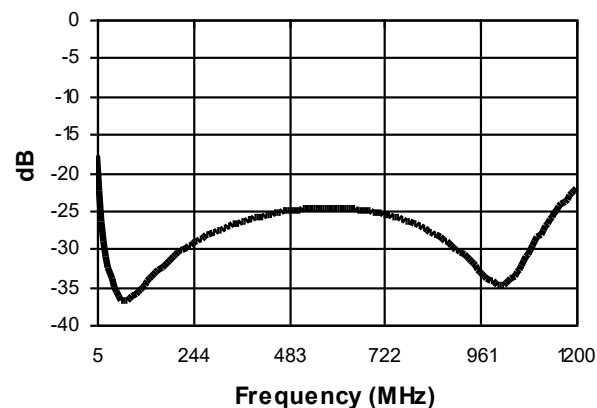


Amplitude Balance

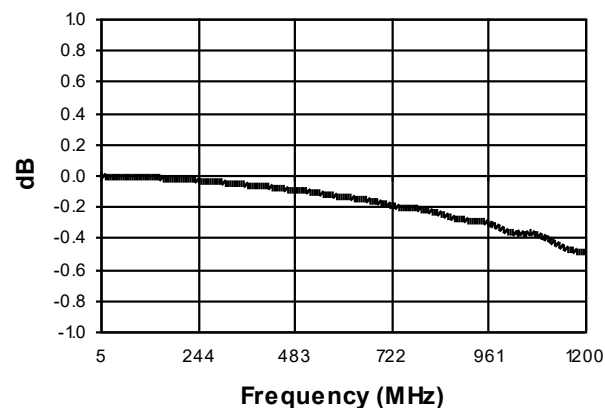


Phase Balance

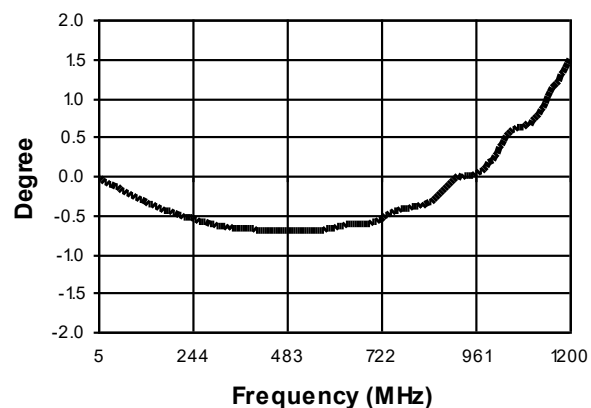

Return Loss: Input

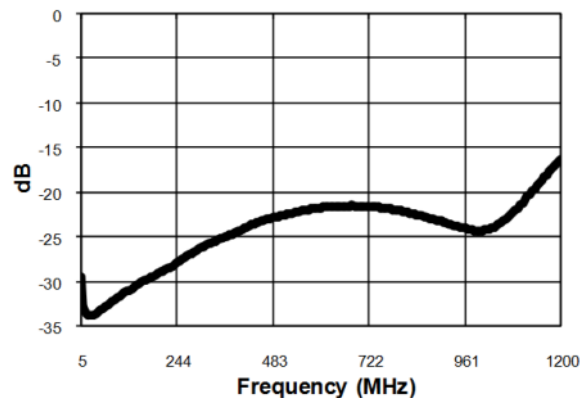

Return Loss: Output

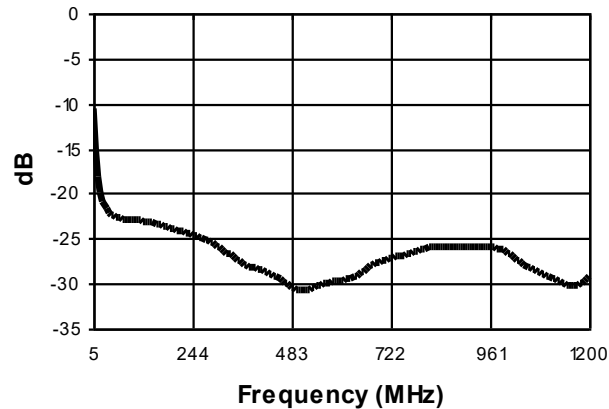

3. Full temperature plot data available on request.


3 Way, 0° Power Divider 5 - 1200 MHz




MAPDCT0032

Rev. V7

Outline Drawing^{4,5,6,7,8,9}

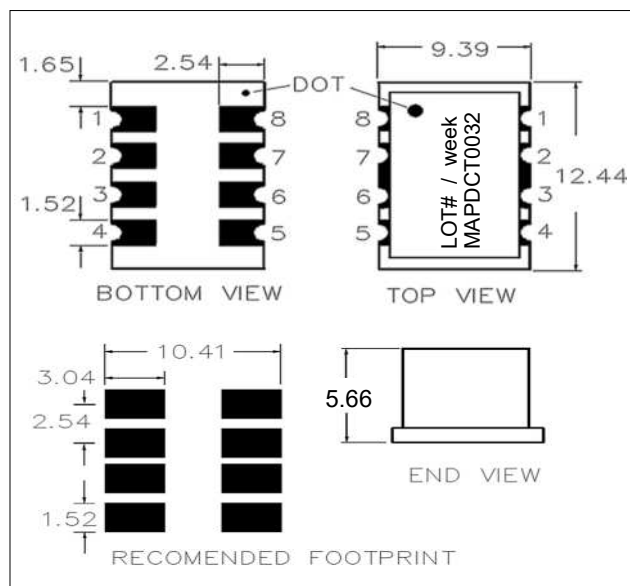

Carrier Tape Orientation

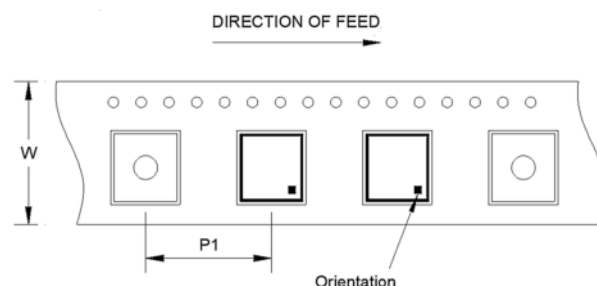

Tape & Reel Information

Item	Dimension
W	24 mm +/-0.3 mm
P1	16 mm +/-0.1 mm
Orientation	F3 (Ref. App. Note: ANI-019 for Orientation)

4. Dimensions in mm.
5. Tolerance: ± 0.2 mm unless otherwise noted.
6. Model number and lot code are printed on the reel.
7. Lead plating: ENIG.
8. Reference Application Note J-STD-020E for lead-free solder reflow recommendations.
9. Meets JEDEC moisture sensitivity level 1 requirements.

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.