19-2266; Rev 2; 6/03

MAXIM

3ppm/°C, Low-Power, Low-Dropout Voltage Reference

General Description

The MAX6133 high-precision, low-power, low-dropout voltage reference features a low 3ppm/°C (max) temperature coefficient and a low dropout voltage (200mV, max). This series-mode device features bandgap technology for low-noise performance and excellent accuracy. Load regulation specifications are guaranteed for source currents up to 15mA. The laser-trimmed, high-stability thin-film resistors, together with post-package trimming, guarantee an excellent initial accuracy specification (0.04%, max). The MAX6133 is a series voltage reference and consumes only 40µA of supply current (virtually independent of supply voltage). Series-mode references save system power and use minimal external components compared to 2-terminal shunt references.

The MAX6133 is available in 8-pin µMAX and SO packages. The unique blend of tiny packaging and excellent precision performance make these parts ideally suited for portable and communication applications.

Applications

Precision Regulators
A/D and D/A Converters
Power Supplies
High-Accuracy Industrial and Process Control
Hand-Held Instruments

Features

- **Low Temperature Coefficient**
  3ppm/°C (max), SO
  5ppm/°C (max), µMAX
- **Tiny 5mm × 3mm µMAX Package**
- **Low 200mV (max) Dropout Voltage**
- **Low 40µA Quiescent Current**
- **±0.04% (max) Initial Accuracy**
- **Low 16µVP-P Noise (0.1Hz to 10Hz) (2.5V Output)**
- **15mA Output Source-Current Capability**
- **Wide 2.7V to 12.6V Supply Voltage**
- **Excellent Line (30µV/V, max) and Load (0.05mV/mA, max) Regulation**

Selector Guide


SUFFIX	VOLTAGE OUTPUT
25	2.500V
30	3.000V
41	4.096V
50	5.000V

Ordering Information


PART	TEMP RANGE	PIN-PACKAGE	MAXIMUM INITIAL ACCURACY (%)	MAXIMUM TEMPCO (ppm/°C, -40°C to +85°C)
MAX6133A_ _	-40°C to +125°C	8 µMAX	0.06	5
MAX6133AASA_ _	-40°C to +125°C	8 SO	0.04	3
MAX6133BASA_ _	-40°C to +125°C	8 SO	0.08	5

Note: *Two-number part suffix indicates output voltage option.*

Typical Operating Circuit

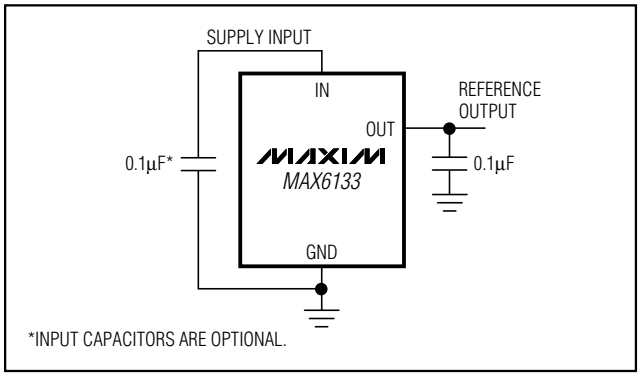

Pin Configuration

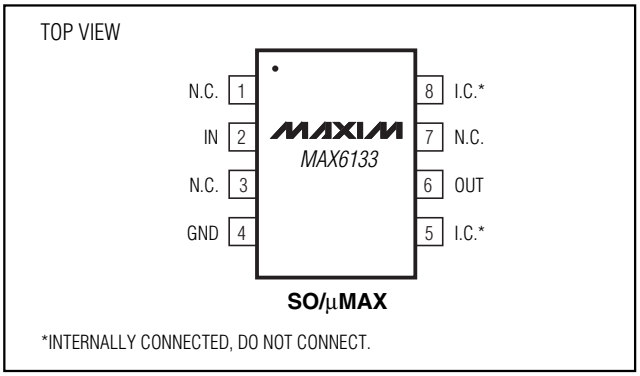

For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

3ppm/°C, Low-Power, Low-Dropout Voltage Reference

ABSOLUTE MAXIMUM RATINGS

Voltage (with Respect to GND)
IN .....-0.3V to +13V
OUT .....-0.3V to +6V or (V_{IN} + 0.3V)
OUT Short Circuit to IN or GND Duration 60s
Continuous Power Dissipation (T_A = +70°C)
8-Pin µMAX (derate 5.5mW/°C above +70°C) 362mW
8-Pin SO (derate 5.88mW/°C above +70°C).....471mW

Operating Temperature Range .....-40°C to +125°C
Storage Temperature Range .....-65°C to +150°C
Junction Temperature .....+150°C
Lead Temperature (soldering, 10s) .....+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS—MAX6133_25 (V_{OUT} = 2.500V)

(V_{IN} = 5V, C_{LOAD} = 0.1µF, I_{OUT} = 0, T_A = T_{MIN} to T_{MAX}. Typical values are at T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Output Voltage	V_{OUT}	T_A = +25°C	A grade SO	2.4990	2.5000	2.5010	V
			B grade SO	2.4980	2.5000	2.5020	
			µMAX	2.4985	2.5000	2.5015	
Output Voltage Accuracy		T_A = +25°C	A grade SO	-0.04		+0.04	%
			B grade SO	-0.08		+0.08	
			µMAX	-0.06		+0.06	
Output Voltage Temperature Coefficient (Note 1)	TCV_{OUT}	A grade SO	T_A = -40°C to +85°C		1	3	ppm/°C
			T_A = -40°C to +125°C		4	7	
		B grade SO	T_A = -40°C to +85°C		3	5	
			T_A = -40°C to +125°C		5	10	
		µMAX	T_A = -40°C to +85°C		1	5	
			T_A = -40°C to +125°C		2	7	
Input Voltage Range	V_{IN}	Inferred from line regulation		2.7		12.6	V
Line Regulation	$\Delta V_{OUT}/\Delta V_{IN}$	2.7V ≤ V_{IN} ≤ 12.6V			2	30	µV/V
Load Regulation	$\Delta V_{OUT}/\Delta I_{OUT}$	-100µA ≤ I_{OUT} ≤ 15mA			0.003	0.05	mV/mA
Dropout Voltage (Note 2)	V_{DO}	ΔV_{OUT} = 0.1%, I_{OUT} = 1mA			0.02	0.2	V
		ΔV_{OUT} = 0.1%, I_{OUT} = 10mA			0.2	0.4	
Quiescent Supply Current	I_{IN}	T_A = +25°C			40	60	µA
		T_A = -40°C to +125°C				85	
Output Short-Circuit Current	I_{SC}	Short to GND: V_{OUT} = 0V			90		mA
		Short to V_{IN}: V_{OUT} = V_{IN}			-2		
Output Voltage Noise	e_n	0.1Hz ≤ f ≤ 10Hz			16		μV_{P-P}
		10Hz ≤ f ≤ 1kHz			12		μV_{RMS}
Turn-On Settling Time	t_{ON}	V_{OUT} settles to ±0.01% of final value			500		µs
Thermal Hysteresis (Note 3)					120		ppm
Long-Term Stability		Δt = 1000 hours	SO		40		ppm
			µMAX		145		

ELECTRICAL CHARACTERISTICS—MAX6133_30 (V_{OUT} = 3.0000V)

(V_{IN} = 5V, C_{LOAD} = 0.1µF, I_{OUT} = 0, T_A = T_{MIN} to T_{MAX}. Typical values are at T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Output Voltage	V_{OUT}	T_A = +25°C	A grade SO	2.9988	3.0000	3.0012	V
			B grade SO	2.9976	3.0000	3.0024	
			µMAX	2.9982	3.0000	3.0018	
Output Voltage Accuracy		T_A = +25°C	A grade SO	-0.04		+0.04	%
			B grade SO	-0.08		+0.08	
			µMAX	-0.06		+0.06	
Output Voltage Temperature Coefficient (Note 1)	TCV_{OUT}	A grade SO	T_A = -40°C to +85°C		1	3	ppm/°C
			T_A = -40°C to +125°C		4	7	
		B grade SO	T_A = -40°C to +85°C		3	5	
			T_A = -40°C to +125°C		5	10	
		µMAX	T_A = -40°C to +85°C		1	5	
			T_A = -40°C to +125°C		2	7	
Input Voltage Range	V_{IN}	Inferred from line regulation		3.2		12.6	V
Line Regulation	$\Delta V_{OUT}/\Delta V_{IN}$	3.2V ≤ V_{IN} ≤ 12.6V			2	30	µV/V
Load Regulation	$\Delta V_{OUT}/\Delta I_{OUT}$	-100µA ≤ I_{OUT} ≤ 15mA			0.003	0.06	mV/mA
Dropout Voltage (Note 2)	V_{DO}	ΔV_{OUT} = 0.1%, I_{OUT} = 1mA			0.01	0.2	V
		ΔV_{OUT} = 0.1%, I_{OUT} = 10mA			0.2	0.4	
Quiescent Supply Current	I_{IN}	T_A = +25°C			40	60	µA
		T_A = -40°C to +125°C				85	
Output Short-Circuit Current	I_{SC}	Short to GND: V_{OUT} = 0V			90		mA
		Short to V_{IN}: V_{OUT} = V_{IN}			-2		
Output Voltage Noise	e_n	0.1Hz ≤ f ≤ 10Hz			24		μV_{P-P}
		10Hz ≤ f ≤ 1kHz			15		μV_{RMS}
Turn-On Settling Time	t_{ON}	V_{OUT} settles to ±0.01% of final value			600		µs
Thermal Hysteresis (Note 3)					120		ppm
Long-Term Stability		Δt = 1000 hours	SO		40		ppm
			µMAX		145		

3ppm/°C, Low-Power, Low-Dropout Voltage Reference

ELECTRICAL CHARACTERISTICS—MAX6133_41 (V_{OUT} = 4.096V)

(V_{IN} = 5V, C_{LOAD} = 0.1µF, I_{OUT} = 0, T_A = T_{MIN} to T_{MAX}. Typical values are at T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Output Voltage	V_{OUT}	T_A = +25°C	A grade SO	4.0943	4.0960	4.0977	V
			B grade SO	4.0927	4.0960	4.0993	
			µMAX	4.0935	4.0960	4.0985	
Output Voltage Accuracy		T_A = +25°C	A grade SO	-0.04		+0.04	%
			B grade SO	-0.08		+0.08	
			µMAX	-0.06		+0.06	
Output Voltage Temperature Coefficient (Note 1)	TCV_{OUT}	A grade SO	T_A = -40°C to +85°C		1	3	ppm/°C
			T_A = -40°C to +125°C		4	7	
		B grade SO	T_A = -40°C to +85°C		3	5	
			T_A = -40°C to +125°C		5	10	
		µMAX	T_A = -40°C to +85°C		1	5	
			T_A = -40°C to +125°C		2	7	
Input Voltage Range	V_{IN}	Inferred from line regulation		4.2		12.6	V
Line Regulation	$\Delta V_{OUT}/\Delta V_{IN}$	4.2V ≤ V_{IN} ≤ 12.6V			2	40	µV/V
Load Regulation	$\Delta V_{OUT}/\Delta I_{OUT}$	-100µA ≤ I_{OUT} ≤ 15mA			0.003	0.08	mV/mA
Dropout Voltage (Note 2)	V_{DO}	ΔV_{OUT} = 0.1%, I_{OUT} = 1mA			0.01	0.2	V
		ΔV_{OUT} = 0.1%, I_{OUT} = 10mA			0.2	0.4	
Quiescent Supply Current	I_{IN}	T_A = +25°C			45	65	µA
		T_A = -40°C to +125°C				85	
Output Short-Circuit Current	I_{SC}	Short to GND: V_{OUT} = 0V			90		mA
		Short to V_{IN}: V_{OUT} = V_{IN}			-2		
Output Voltage Noise	e_n	0.1Hz ≤ f ≤ 10Hz			32		μV_{P-P}
		10Hz ≤ f ≤ 1kHz			22		μV_{RMS}
Turn-On Settling Time	t_{ON}	V_{OUT} settles to ±0.01% of final value			800		µs
Thermal Hysteresis (Note 3)					120		ppm
Long-Term Stability		Δt = 1000 hours	SO		40		ppm
			µMAX		145		

ELECTRICAL CHARACTERISTICS—MAX6133_50 (V_{OUT} = 5.000V)

(V_{IN} = 5.5V, C_{LOAD} = 0.1µF, I_{OUT} = 0, T_A = T_{MIN} to T_{MAX}. Typical values are at T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Output Voltage	V_{OUT}	T_A = +25°C	A grade SO	4.9980	5.0000	5.0020	V
			B grade SO	4.9960	5.0000	5.0040	
			µMAX	4.9970	5.0000	5.0030	
Output Voltage Accuracy		T_A = +25°C	A grade SO	-0.04		+0.04	%
			B grade SO	-0.08		+0.08	
			µMAX	-0.06		+0.06	
Output Voltage Temperature Coefficient (Note 1)	TCV_{OUT}	A grade SO	T_A = -40°C to +85°C		1	3	ppm/°C
			T_A = -40°C to +125°C		4	7	
		B grade SO	T_A = -40°C to +85°C		3	5	
			T_A = -40°C to +125°C		5	10	
		µMAX	T_A = -40°C to +85°C		1	5	
			T_A = -40°C to +125°C		2	7	
Input Voltage Range	V_{IN}	Inferred from line regulation		5.2		12.6	V
Line Regulation	$\Delta V_{OUT}/\Delta V_{IN}$	5.2V ≤ V_{IN} ≤ 12.6V			2	50	µV/V
Load Regulation	$\Delta V_{OUT}/\Delta I_{OUT}$	-100µA ≤ I_{OUT} ≤ 15mA			0.01	0.10	mV/mA
Dropout Voltage (Note 2)	V_{DO}	ΔV_{OUT} = 0.1%, I_{OUT} = 1mA			0.02	0.2	V
		ΔV_{OUT} = 0.1%, I_{OUT} = 10mA			0.2	0.4	
Quiescent Supply Current	I_{IN}	T_A = +25°C			40	60	µA
		T_A = -40°C to +125°C				85	
Output Short-Circuit Current	I_{SC}	Short to GND: V_{OUT} = 0V			90		mA
		Short to V_{IN}: V_{OUT} = V_{IN}			-2		
Output Voltage Noise	e_n	0.1Hz ≤ f ≤ 10Hz			40		μV_{P-P}
		10Hz ≤ f ≤ 1kHz			26		μV_{RMS}
Turn-On Settling Time	t_{ON}	V_{OUT} settles to ±0.01% of final value			1000		µs
Thermal Hysteresis (Note 3)					120		ppm
Long-Term Stability		Δt = 1000 hours	SO		40		ppm
			µMAX		145		

Note 1: The MAX6133 is 100% drift-tested for T_A = T_{MIN} to T_{MAX}, as specified.

Note 2: Dropout Voltage is the minimum voltage at which V_{OUT} changes ≤ 0.1% from V_{OUT} at V_{IN} = 5V (V_{IN} = 5.5V for V_{OUT} = 5V).


Note 3: Thermal Hysteresis is defined as the change in the initial +25°C output voltage after cycling the device from T_{MAX} to T_{MIN}.

3ppm/°C, Low-Power, Low-Dropout Voltage Reference


Typical Operating Characteristics

(V_{IN} = 5V, I_{OUT} = 0, T_A = +25°C, unless otherwise noted.) (Note 4)


OUTPUT VOLTAGE vs. TEMPERATURE (V_{OUT} = 2.5V)

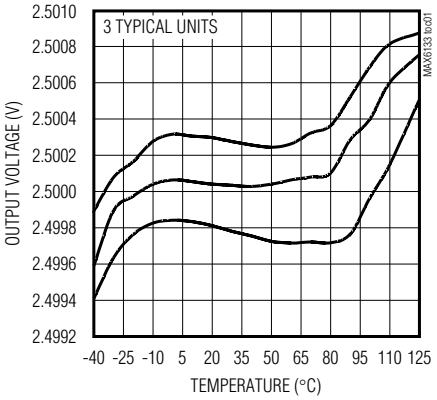


OUTPUT VOLTAGE vs. TEMPERATURE (V_{OUT} = 5V)

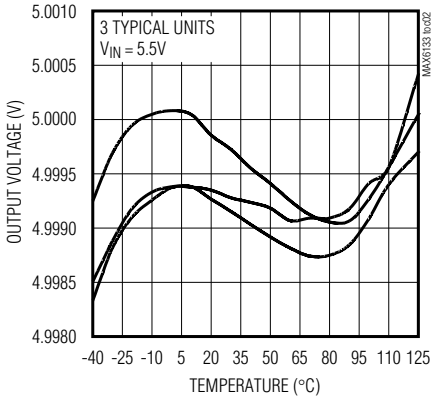


LOAD REGULATION (V_{OUT} = 2.5V)

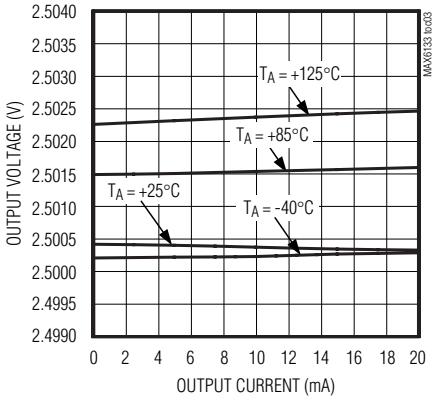


LOAD REGULATION (V_{OUT} = 5V)

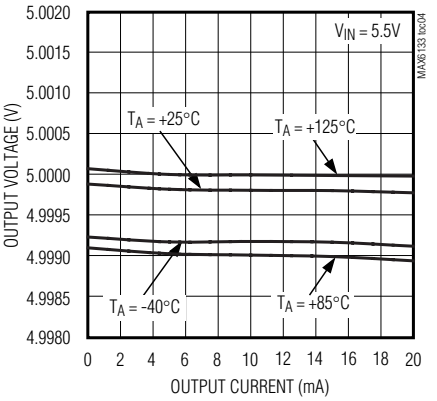


DROPOUT VOLTAGE vs. OUTPUT CURRENT (V_{OUT} = 2.5V)

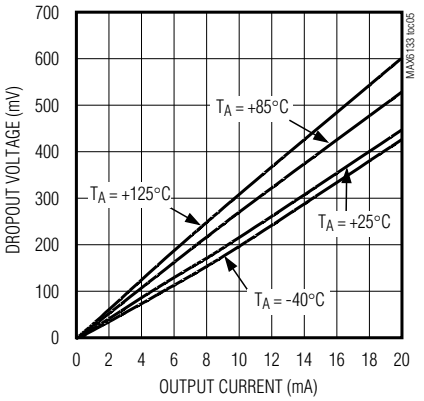


DROPOUT VOLTAGE vs. OUTPUT CURRENT (V_{OUT} = 5V)

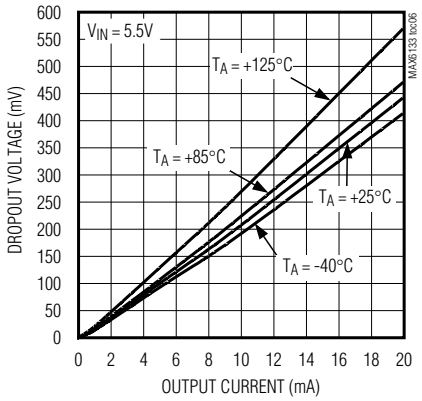


POWER-SUPPLY REJECTION RATIO vs. FREQUENCY (V_{OUT} = 2.5V)

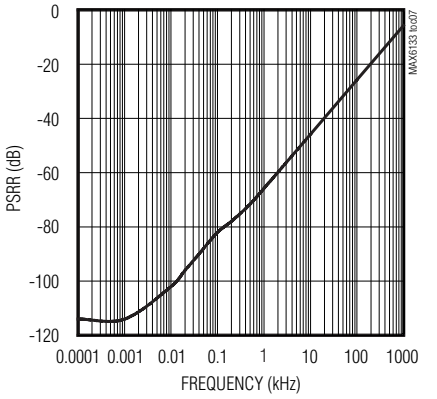

POWER-SUPPLY REJECTION RATIO vs. FREQUENCY (V_{OUT} = 5V)

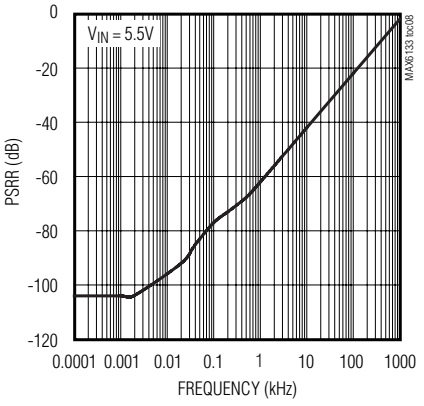


SUPPLY CURRENT vs. INPUT VOLTAGE (V_{OUT} = 2.5V)

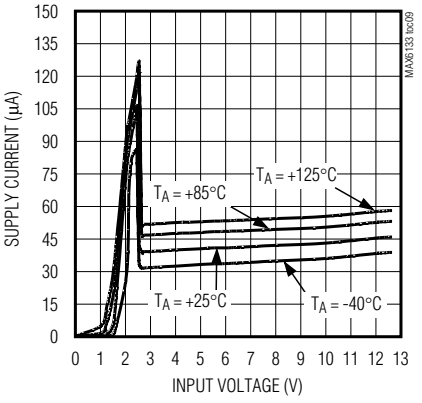


Typical Operating Characteristics (continued)

(V_{IN} = 5V, I_{OUT} = 0, T_A = +25°C, unless otherwise noted.) (Note 4)


SUPPLY CURRENT vs. INPUT VOLTAGE (V_{OUT} = 5V)

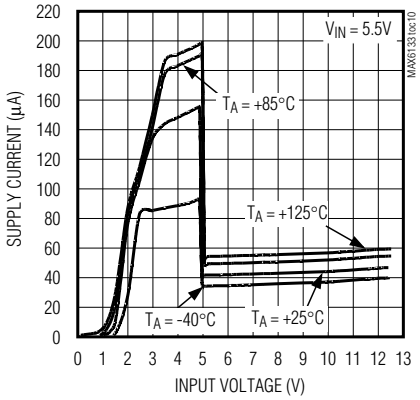


0.1Hz TO 10Hz OUTPUT NOISE (V_{OUT} = 2.5V)

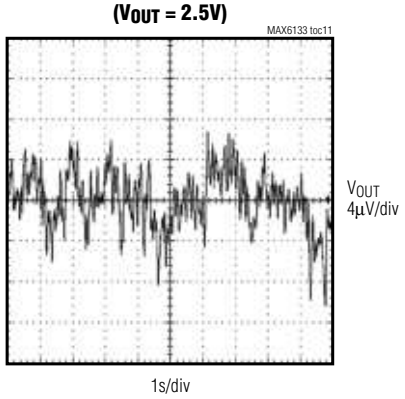


0.1Hz TO 10Hz OUTPUT NOISE (V_{OUT} = 5V)

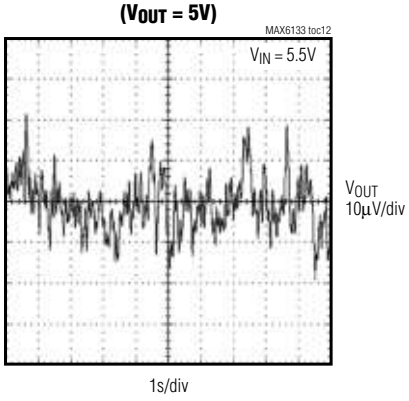


LOAD TRANSIENT (V_{OUT} = 2.5V)

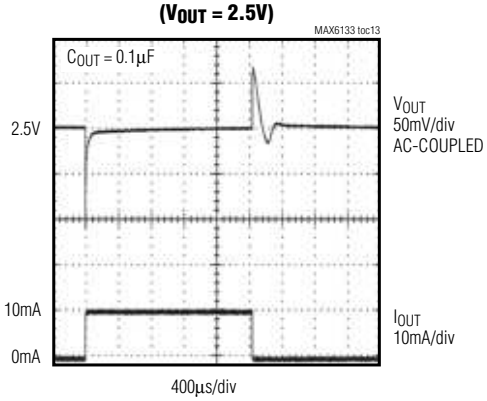

LOAD TRANSIENT (V_{OUT} = 2.5V)

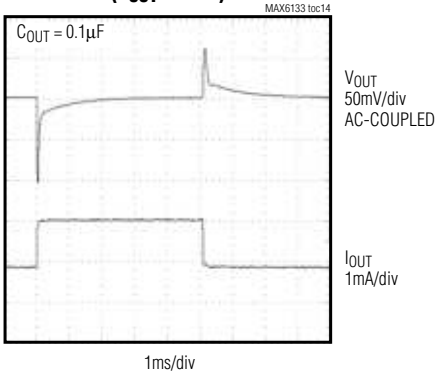

LOAD TRANSIENT (V_{OUT} = 2.5V)

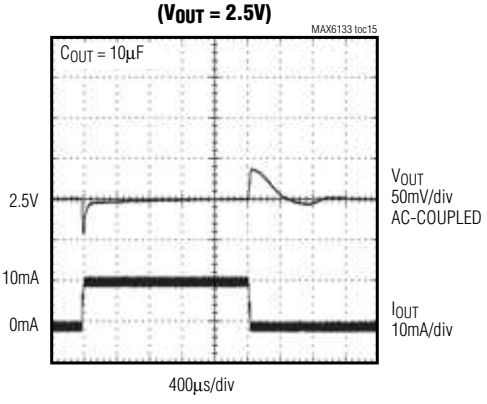


3ppm/°C, Low-Power, Low-Dropout Voltage Reference


Typical Operating Characteristics (continued)

(V_{IN} = 5V, I_{OUT} = 0, T_A = +25°C, unless otherwise noted.) (Note 4)


LOAD TRANSIENT
(V_{OUT} = 2.5V)

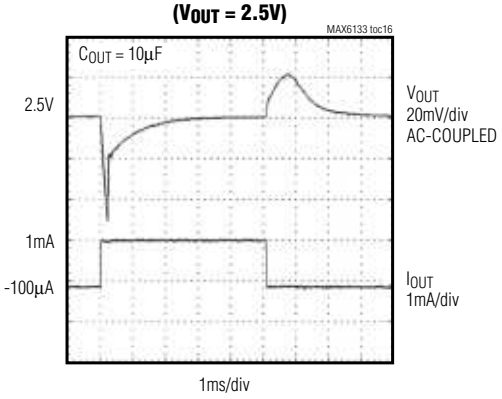


LINE TRANSIENT
(V_{OUT} = 2.5V)

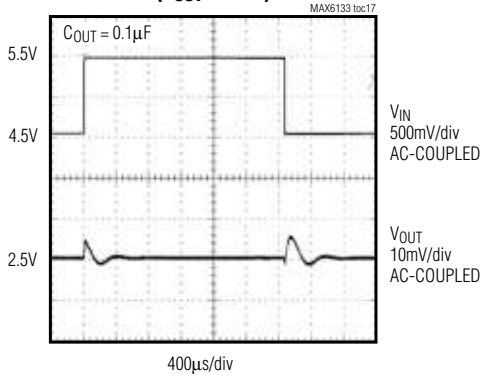


LINE TRANSIENT
(V_{OUT} = 5V)

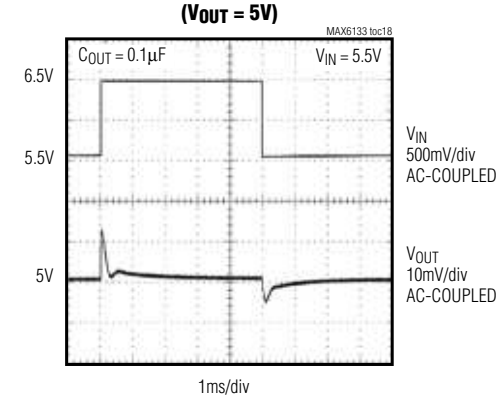


TURN-ON TRANSIENT
(V_{OUT} = 2.5V)

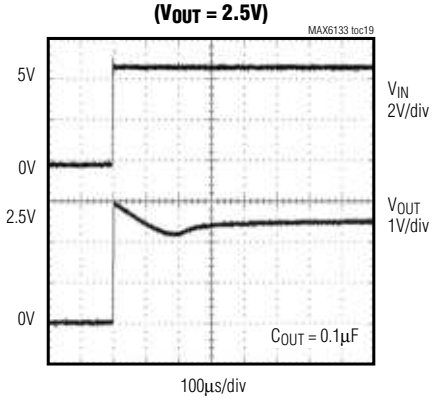

TURN-ON TRANSIENT
(V_{OUT} = 5V)

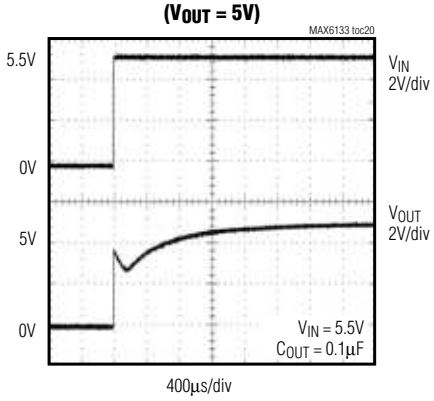


TURN-ON TRANSIENT
(V_{OUT} = 2.5V)

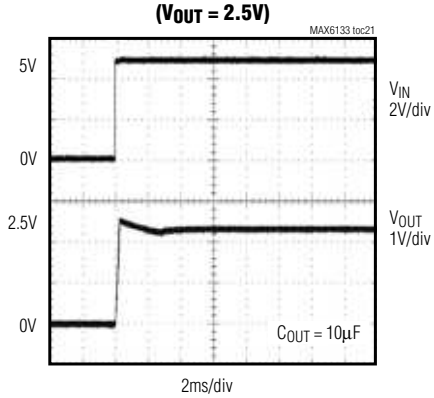


Typical Operating Characteristics (continued)

(V_{IN} = 5V, I_{OUT} = 0, T_A = +25°C, unless otherwise noted.) (Note 4)


TURN-ON TRANSIENT (V_{OUT} = 5V)

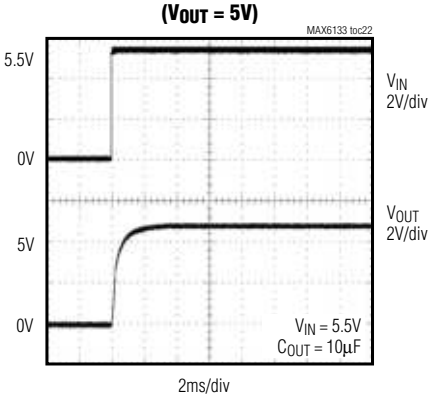


LONG-TERM STABILITY vs. TIME (V_{OUT} = 2.5V)

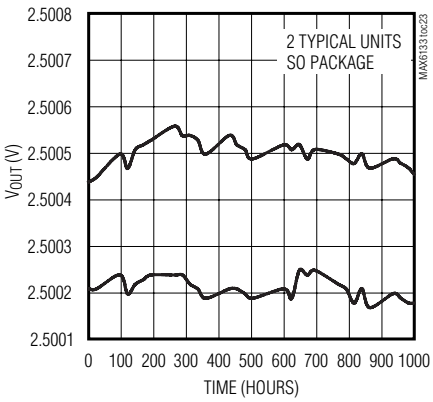


LONG-TERM STABILITY vs. TIME (V_{OUT} = 2.5V)

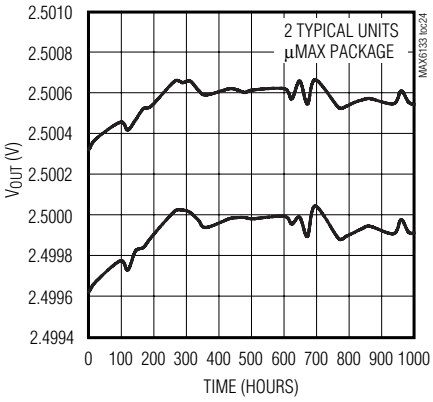

LONG-TERM STABILITY vs. TIME (V_{OUT} = 5.0V)

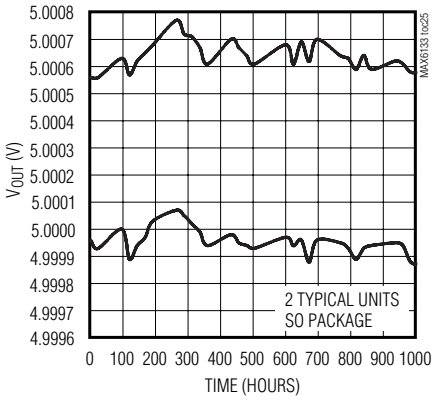

LONG-TERM STABILITY vs. TIME (V_{OUT} = 5.0V)

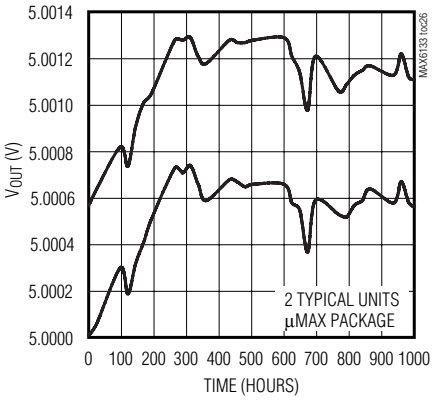

Note 4: Many of the MAX6133 *Typical Operating Characteristics* are extremely similar. The extremes of these characteristics are found in the MAX6133 (2.5V output) and the MAX6133 (5V output). The *Typical Operating Characteristics* of the remainder of the MAX6133 family typically lie between these two extremes and can be estimated based on their output voltages.

3ppm/°C, Low-Power, Low-Dropout Voltage Reference

Pin Description

PIN	NAME	FUNCTION
1, 3, 7	N.C.	No Connection. Not connected internally. Leave unconnected or connect to GND.
2	IN	Positive Power-Supply Input
4	GND	Ground
5, 8	I.C.	Internally Connected. Do not connect externally.
6	OUT	Reference Output Voltage. Connect a 0.1µF minimum capacitor to GND.

Applications Information

Bypassing/Load Capacitance

For the best line-transient performance, decouple the input with a 0.1µF ceramic capacitor as shown in the *Typical Operating Circuit*. Place the capacitor as close to IN as possible. When transient performance is less important, no capacitor is necessary. The MAX6133 family requires a minimum output capacitance of 0.1µF for stability and is stable with capacitive loads (including the bypass capacitance) of up to 100µF. In applications where the load or the supply can experience step changes, a larger output capacitor reduces the amount of overshoot (undershoot) and improves the circuit's transient response. Place output capacitors as close to the device as possible.

Supply Current

The quiescent supply current of the MAX6133 series reference is typically 40µA and is virtually independent of the supply voltage. In the MAX6133 family, the load current is drawn from the input only when required, so supply current is not wasted and efficiency is maximized at all input voltages. This improved efficiency reduces power dissipation and extends battery life. When the supply voltage is below the minimum-specified input voltage (as during turn-on), the devices can draw up to 150µA beyond the nominal supply current. The input voltage source must be capable of providing this current to ensure reliable turn-on.

Thermal Hysteresis

Thermal hysteresis is the change in the output voltage at T_A = +25°C before and after the device is cycled over its entire operating temperature range. Hysteresis is caused by differential package stress appearing across the bandgap core transistors. The typical thermal hysteresis value is 120ppm for both SO and µMAX packages.

Turn-On Time

These devices typically turn on and settle to within 0.01% of their final value in <1ms. The turn-on time can increase up to 2ms with the device operating at the minimum dropout voltage and the maximum load.

Low-Power, 14-Bit DAC with MAX6133 as a Reference

Figure 1 shows a typical application circuit for the MAX6133 providing both the power supply and precision reference voltage for a 14-bit high-resolution, serial-input, voltage-output digital-to-analog converter. The MAX6133 with a 2.5V output provides the reference voltage for the DAC.

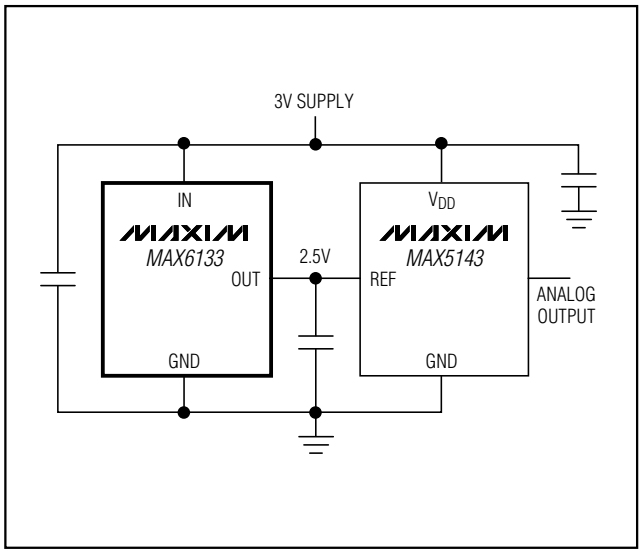


Figure 1. 14-Bit High-Resolution DAC and Positive Reference From a Single 3V Supply

3ppm/°C, Low-Power, Low-Dropout Voltage Reference

Negative Low-Power Voltage Reference

As shown in Figure 2, the MAX6133 can be used to develop a negative voltage reference using the MAX400, a rail-to-rail op-amp with low power, low noise, and low offset. The circuit only provides a good negative reference and is ideal for space- and cost-sensitive applications since it does not use resistors.

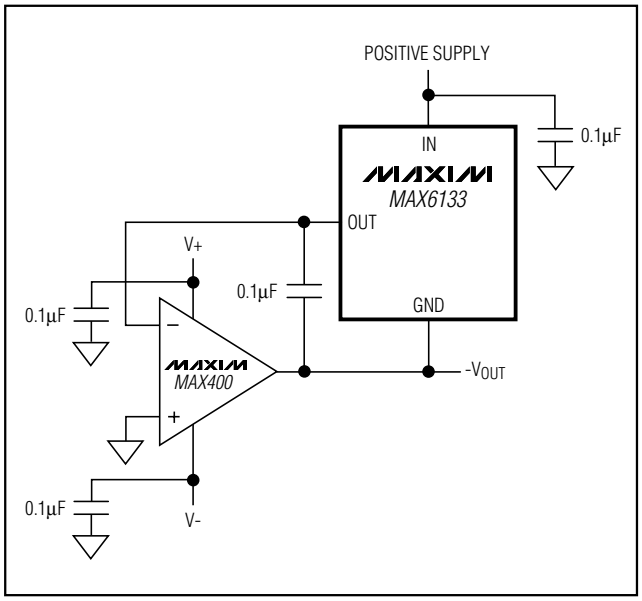


Figure 2. Negative Low-Power Voltage Reference

Temperature Coefficient vs. Operating Temperature Range for a 1LSB Maximum Error

In a data converter application, the converter's reference voltage must stay within a certain limit to keep the error in the data converter smaller than the resolution limit through the operating temperature range. Figure 3 shows the maximum allowable reference-voltage temperature coefficient that keeps the conversion error to less than 1LSB. This is a function of the operating temperature range (T_{MAX} - T_{MIN}) with the converter resolution as a parameter. The graph assumes the reference-voltage temperature coefficient as the only parameter affecting accuracy. In reality, the absolute static accuracy of a data converter is dependent on the combination of many parameters such as integral nonlinearity, differential nonlinearity, offset error, gain error, as well as voltage reference changes.

Chip Information

TRANSISTOR COUNT: 656

PROCESS: BiCMOS

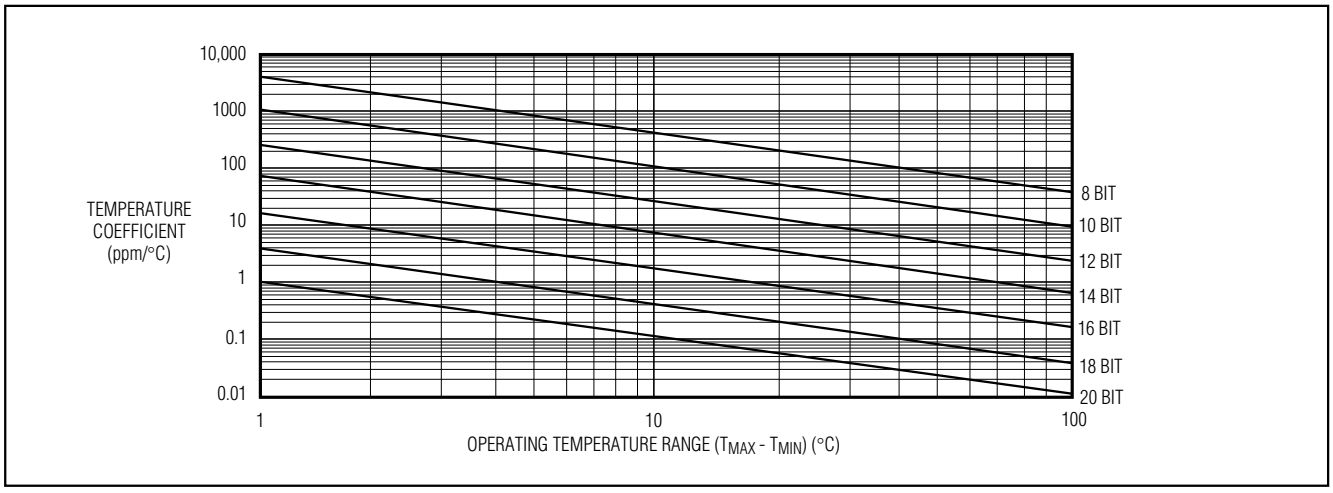



Figure 3. Temperature Coefficient vs. Operating Temperature Range for a 1LSB Maximum Error

3ppm/°C, Low-Power, Low-Dropout Voltage Reference

Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to **www.maxim-ic.com/packages**.)

SOICN .EPS

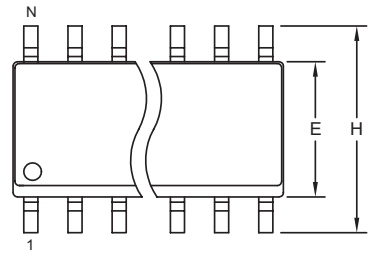


TOP VIEW


	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.053	0.069	1.35	1.75
A1	0.004	0.010	0.10	0.25
B	0.014	0.019	0.35	0.49
C	0.007	0.010	0.19	0.25
e	0.050 BSC		1.27 BSC	
E	0.150	0.157	3.80	4.00
H	0.228	0.244	5.80	6.20
L	0.016	0.050	0.40	1.27

VARIATIONS:

	INCHES		MILLIMETERS			
DIM	MIN	MAX	MIN	MAX	N	MS012
D	0.189	0.197	4.80	5.00	8	AA
D	0.337	0.344	8.55	8.75	14	AB
D	0.386	0.394	9.80	10.00	16	AC

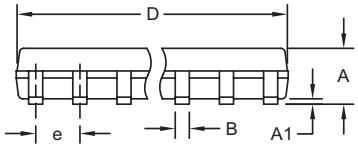

FRONT VIEW



SIDE VIEW

NOTES:
1. D&E DO NOT INCLUDE MOLD FLASH.
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED 0.15mm (.006").
3. LEADS TO BE COPLANAR WITHIN 0.10mm (.004").
4. CONTROLLING DIMENSION: MILLIMETERS.
5. MEETS JEDEC MS012.
6. N = NUMBER OF PINS.

DALLAS SEMICONDUCTOR MAXIM

PROPRIETARY INFORMATION


TITLE: PACKAGE OUTLINE, .150" SOIC

APPROVAL	DOCUMENT CONTROL NO.	REV.	
	21-0041	B	1/1


Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to **www.maxim-ic.com/packages**.)

8LUMAXD.EPS

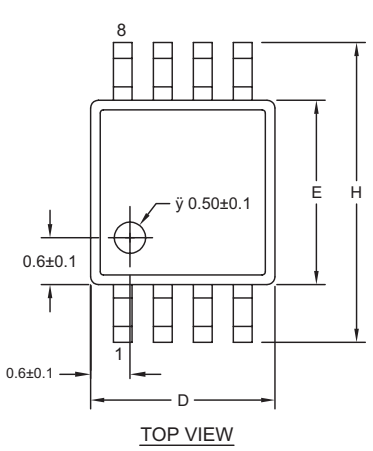


TOP VIEW

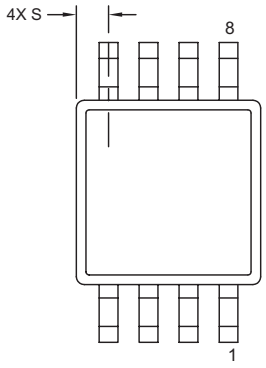


BOTTOM VIEW

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	-	0.043	-	1.10
A1	0.002	0.006	0.05	0.15
A2	0.030	0.037	0.75	0.95
b	0.010	0.014	0.25	0.36
c	0.005	0.007	0.13	0.18
D	0.116	0.120	2.95	3.05
e	0.0256 BSC		0.65 BSC	
E	0.116	0.120	2.95	3.05
H	0.188	0.198	4.78	5.03
L	0.016	0.026	0.41	0.66
α	0∞	6∞	0∞	6∞
S	0.0207 BSC		0.5250 BSC	



FRONT VIEW

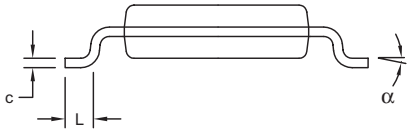

SIDE VIEW

NOTES:
1. D&E DO NOT INCLUDE MOLD FLASH.
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED 0.15MM (.006").
3. CONTROLLING DIMENSION: MILLIMETERS.
4. MEETS JEDEC MO-187C-AA.

DALLAS SEMICONDUCTOR MAXIM

PROPRIETARY INFORMATION

TITLE: PACKAGE OUTLINE, 8L uMAX/uSOP

APPROVAL	DOCUMENT CONTROL NO.	REV.	
	21-0036	J	1/1

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

© 2003 Maxim Integrated Products Printed USA MAXIM is a registered trademark of Maxim Integrated Products.