

MS1238-H series



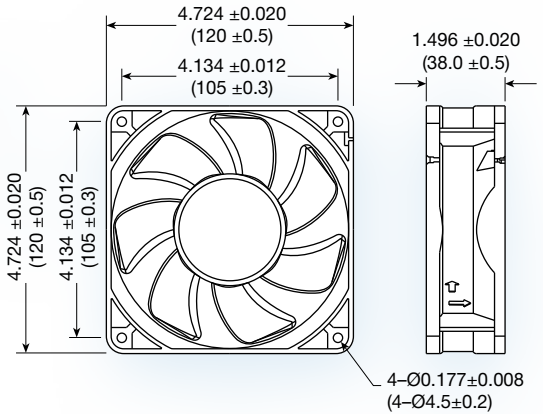

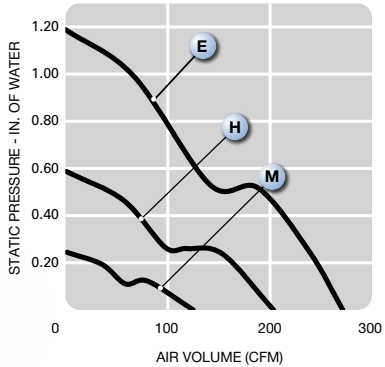

(120 x 120 x 38 mm)

4.72 x 4.72 x 1.52 inches

Features:	soft start, polarity protection, auto-restart
Operating Voltage:	12, 24 and 48 VDC
Construction:	UL94V-0 plastic impeller and plastic frame
Bearing option:	ball bearing and sleeve
Air Flow:	air exhaust over struts
Options:	• tachometer; • locked rotor alarm signal; • PWM speed control; • conformal coating; • encapsulated motor (IP68)



Model No.	Rated Voltage	Current A			Speed	Air Volume		Max. Static Pressure (H_2O)		Sound Noise	Weight
	VDC	12	24	48	RPM	M^3/Min.	CFM	MM	INCH	dbA	g
MS1238M-H	12/24/48	0.72	0.24	0.18	2,500	3.60	127.4	5.90	0.23	42	301
MS1238H-H	12/24/48	2.1	1.02	0.45	4,000	5.71	201.7	14.88	0.59	55	301
MS1238E-H	12/24/48	3.60	1.70	1.0	5,000	7.68	271.0	30.26	1.19	68	301

*Additional performance levels available, contact Mechatronics for more options