

MS2507 series



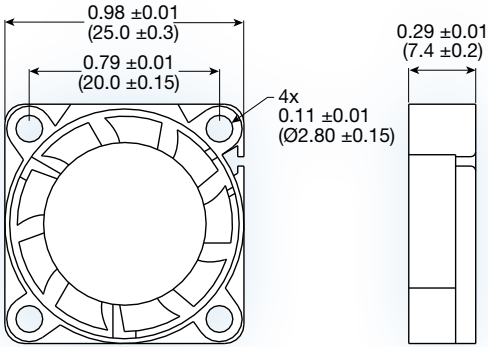

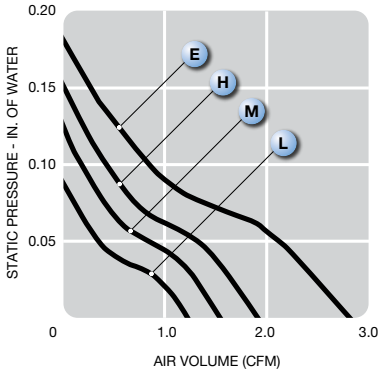

(25 x 25 x 7.4 mm)

0.98 x 0.98 x 0.29 inches

Features:	reverse polarity protection
Operating Voltage:	5 or 12 VDC
Construction:	UL94V-0 plastic impeller and frame
Bearing option:	sleeve or FDB bearing
Motor:	brushless DC
Air Flow:	air exhaust over struts

Model No.	Rated Voltage	Current A		Speed	Air Volume		Max. Static Pressure (H_2O)		Sound Noise	Weight
	VDC	5	12	RPM	M^3/Min.	CFM	MM	INCH	dbA	g
MS2507L	5/12	0.11	0.05	7,000	0.035	1.22	2.28	0.09	20	5
MS2507M	5/12	0.17	0.08	10,000	0.044	1.55	3.05	0.12	24	5
MS2507H	5/12	0.23	0.10	14,000	0.054	1.90	3.81	0.15	28	5
MS2507E	5/12	0.30	0.20	17,000	0.080	2.81	4.57	0.18	31	5