MSA-0470
Cascadable Silicon Bipolar MMIC Amplifier

Data Sheet

Description


The MSA-0470 is a high performance silicon bipolar Monolithic Microwave Integrated Circuit (MMIC) housed in a hermetic, high reliability package. This MMIC is designed for use as a general purpose 50Ω gain block. Typical applications include narrow and broad band IF and RF amplifiers in industrial and military applications.

The MSA-series is fabricated using Avago's 10 GHz f_T, 25 GHz f_{MAX}, silicon bipolar MMIC process which uses nitride self-alignment, ion implantation, and gold metallization to achieve excellent performance, uniformity and reliability. The use of an external bias resistor for temperature and current stability also allows bias flexibility.


Features

- Cascadable 50Ω Gain Block
- 3 dB Bandwidth: DC to 4.0 GHz
- 12.5 dBm Typical P1 dB at 1.0 GHz
- 8.5 dB Typical Gain at 1.0 GHz
- Unconditionally Stable (k>1)
- Hermetic Gold-ceramic Microstrip Package

70 mil Package

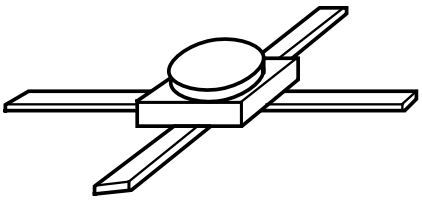

Typical Biasing Configuration

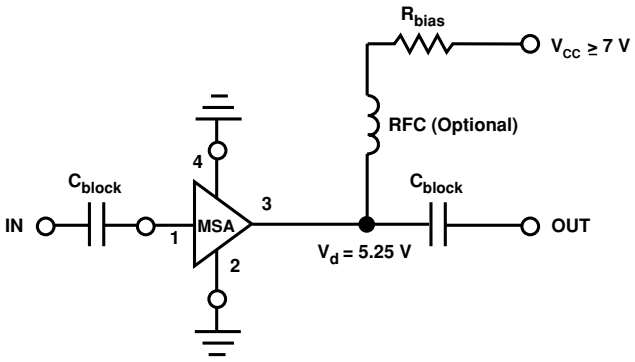

MSA-0470 Absolute Maximum Ratings

Parameter	Absolute Maximum[1]
Device Current	100 mA
Power Dissipation[2,3]	650 mW
RF Input Power	+13 dBm
Junction Temperature	200°C
Storage Temperature	–65 to 200°C

Thermal Resistance[2,4]:
$\theta_{jc} = 115°C/W$

Notes:
1. Permanent damage may occur if any of these limits are exceeded.
2. T_{CASE} = 25°C.
3. Derate at 8.7 mW/°C for $T_C > 125°C$.
4. The small spot size of this technique results in a higher, though more accurate determination of θ_{jc} than do alternate methods.

Electrical Specifications[1], $T_A = 25°C$

Symbol	Parameters and Test Conditions: $I_d = 50$ mA, $Z_0 = 50\ \Omega$		Units	Min.	Typ.	Max.
G_P	Power Gain ($\|S_{21}\|^2$)	f = 0.1 GHz	dB	7.5	8.5	9.5
ΔG_P	Gain Flatness	f = 0.1 to 2.5 GHz	dB		±0.6	±1.0
$f_{3\ dB}$	3 dB Bandwidth		GHz		4.0	
VSWR	Input VSWR	f = 0.1 to 2.5 GHz			1.7:1	
	Output VSWR	f = 0.1 to 2.5 GHz			2.0:1	
NF	50 Ω Noise Figure	f = 1.0 GHz	dB		6.5	
$P_{1\ dB}$	Output Power at 1 dB Gain Compression	f = 1.0 GHz	dBm		12.5	
IP_3	Third Order Intercept Point	f = 1.0 GHz	dBm		25.5	
t_D	Group Delay	f = 1.0 GHz	psec		125	
V_d	Device Voltage		V	4.75	5.25	5.75
dV/dT	Device Voltage Temperature Coefficient		mV/°C		–8.0	

Note:
1. The recommended operating current range for this device is 30 to 70 mA. Typical performance as a function of current is on the following page.

MSA-0470 Typical Scattering Parameters ($Z_0 = 50\ \Omega$, $T_A = 25°C$, $I_d = 50$ mA)

Freq.	S_{11}			S_{21}			S_{12}		S_{22}	
GHz	Mag	Ang	dB	Mag	Ang	dB	Mag	Ang	Mag	Ang
0.1	.18	179	8.5	2.67	176	–16.4	.151	1	.10	–14
0.2	.18	179	8.5	2.67	172	–16.4	.151	2	.10	–30
0.4	.18	179	8.5	2.67	163	–16.4	.152	3	.13	–50
0.6	.17	–179	8.5	2.65	155	–16.2	.155	5	.16	–67
0.8	.16	–176	8.4	2.64	147	–16.1	.158	8	.19	–79
1.0	.16	–174	8.3	2.61	138	–15.9	.161	6	.22	–90
1.5	.16	–166	8.2	2.56	117	–15.5	.169	9	.29	–111
2.0	.21	–163	7.8	2.46	97	–14.6	.186	9	.33	–131
2.5	.26	–162	7.3	2.33	83	–13.8	.204	12	.36	–142
3.0	.32	–170	6.5	2.12	65	–13.5	.212	10	.40	–156
3.5	.37	–177	5.7	1.93	38	–13.2	.220	7	.40	–164
4.0	.40	175	4.7	1.73	33	–12.6	.234	3	.40	–170
4.5	.41	166	3.9	1.57	20	–12.4	.239	–1	.39	–173
5.0	.42	155	3.1	1.44	7	–11.9	.255	–6	.37	–176

Typical Performance, $T_A = 25°C$ (unless otherwise noted)

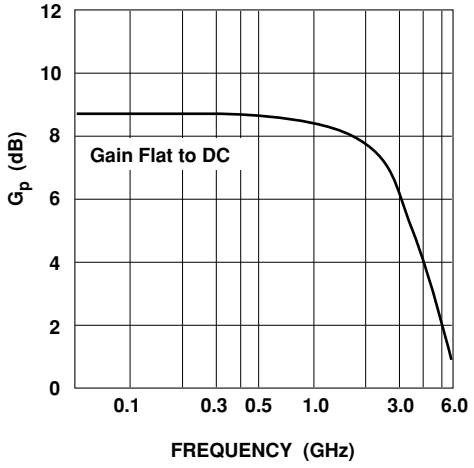


Figure 1. Typical Power Gain vs. Frequency, $T_A = 25°C$, $I_d = 50$ mA.

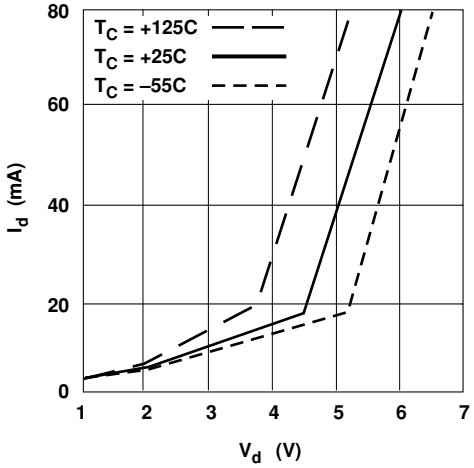


Figure 2. Device Current vs. Voltage.

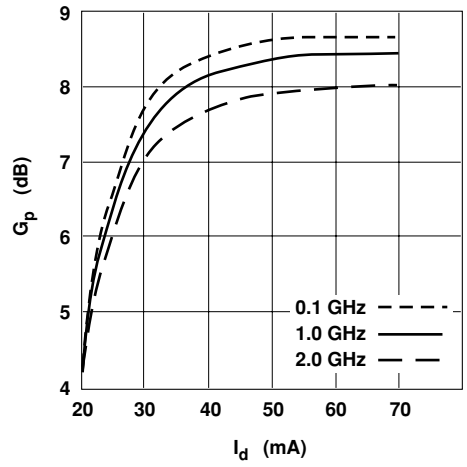


Figure 3. Power Gain vs. Current.

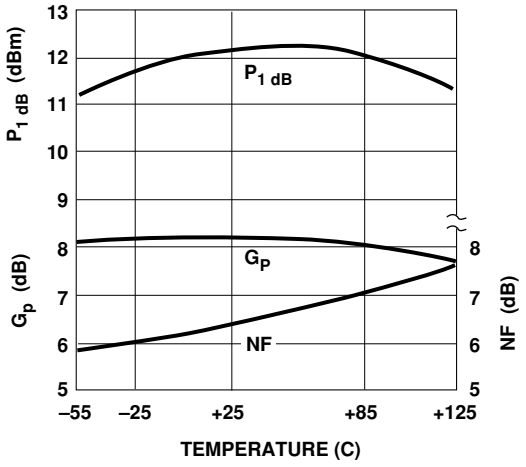


Figure 4. Output Power at 1 dB Gain Compression, NF and Power Gain vs. Case Temperature, f = 1.0 GHz, $I_d = 50$ mA.

Typical Performance, $T_A = 25°C$ (unless otherwise noted)

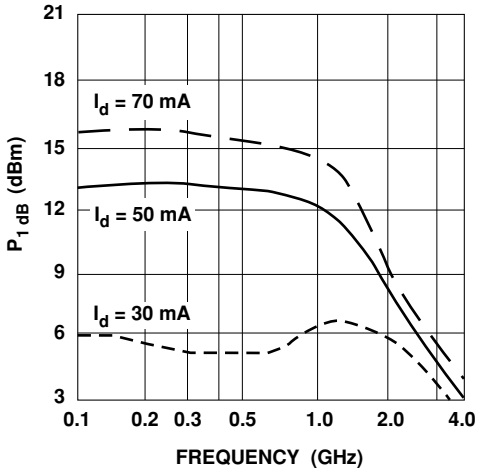


Figure 5. Output Power at 1 dB Gain Compression vs. Frequency.


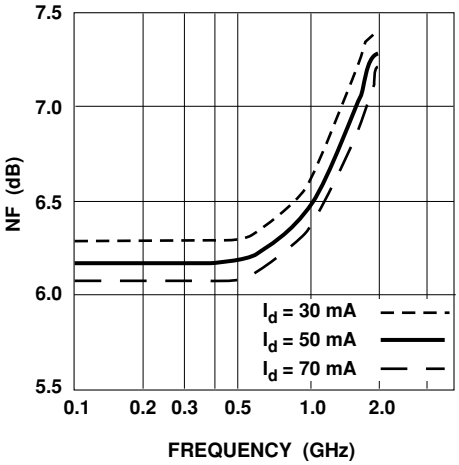


Figure 6. Noise Figure vs. Frequency.

Ordering Information

Part Numbers	No. of Devices	Comments
MSA-0470	100	Bulk

70 mil Package Dimensions

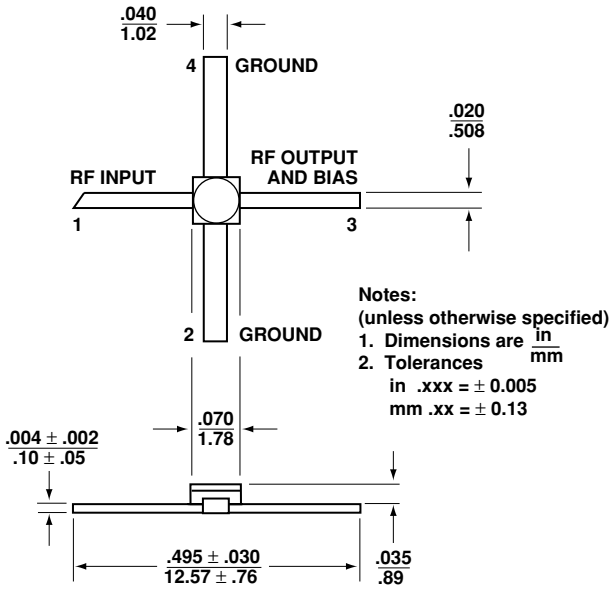

For product information and a complete list of distributors, please go to our web site: **www.avagotech.com**

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies, Limited in the United States and other countries.
Data subject to change. Copyright © 2008 Avago Technologies, Limited. All rights reserved. Obsoletes 5989-2764EN
AV02-1226EN - May 14, 2008