


REVISION HISTORY		
REVISION	DATE	COMMENT

NOTES:


1. MATERIALS: "G" STYLE
   - 1.1 SHELL, FERRULE
     - BRASS PER QQ-B-626
     - FINISH: GOLD, OVER ELECTROLESS NICKEL PER MIL-G-45204, TYP 2, CLASS 1
   - 1.2 INSERT
     - PEEK, GLASS FILLED PER MIL-P-46183
   - 1.3 CONTACTS
     - COPPER ALLOY
     - FINISH: GOLD PER MIL-G-45204
   - 1.4 GASKETS (OPTIONAL)
     - SILICONE RUBBER PER AMS 3304
   - 1.5 ALTERNATE SHELL MATERIALS AND FINISHES:
     - "M" STYLE: BRASS, WITH ELECTROLESS NICKEL FINISH PER AMS-C-26074, CLASS 4, GRADE B
     - "A" STYLE: BRASS, WITH GOLD PLATE, BLACK CHROMATE
     - "K" STYLE: STAINLESS STEEL, 300 SERIES, WITH PASSIVATION

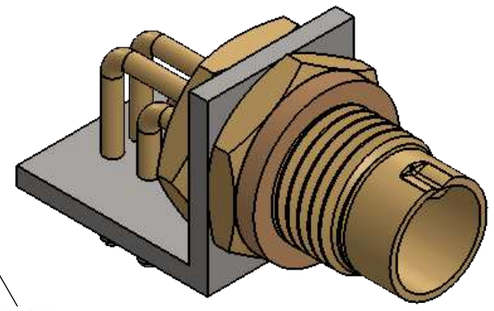


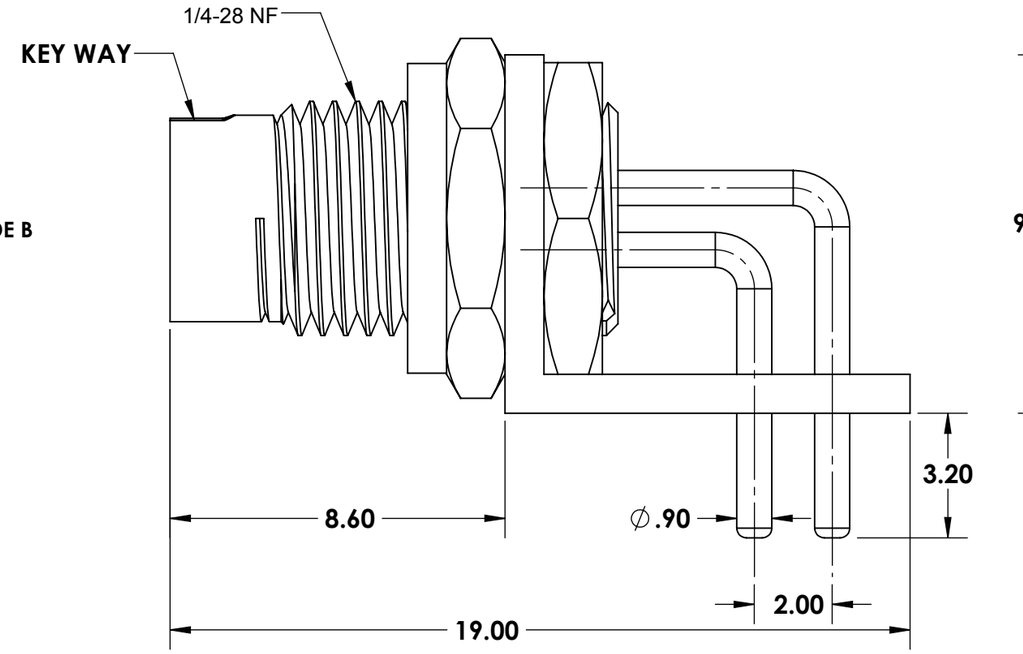

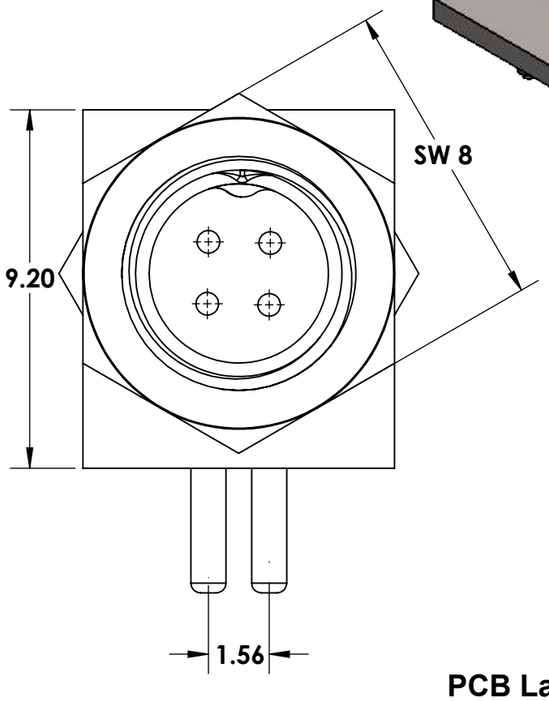


PCB Layout

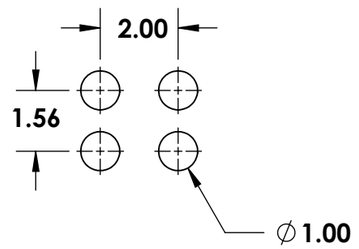


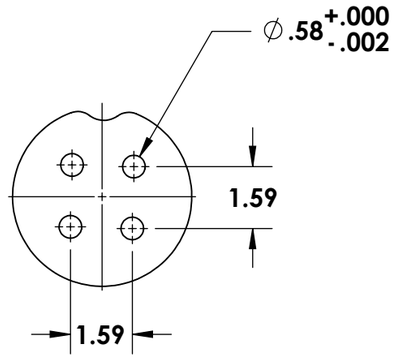

4 POSITION

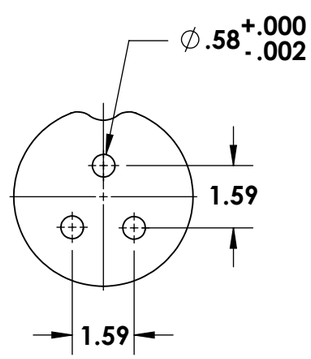

3 POSITION



2 POSITION

UNLESS OTHERWISE NOTED:
DIMENSIONS ARE IN MILLIMETERS
DO NOT SCALE THIS DRAWING

.X DECIMALS ARE ±0.5
.XX DECIMALS ARE ±0.25
.XXX DECIMALS ARE ±0.13

ANGLES ARE ±0.5°

DRAWING	SC	MILSPECWEST- MICRO PRODUCTS	
CHECKED	TS	DESCRIPTION: MICRO 90 DEG PCB RECEPTACLE	
Q.A.	KB	DWG. NO. MSW-G-F***	REVISION: 0
			SHEET 1 OF 2

THIS DOCUMENT IS SOLE PROPERTY OF MILSPECWEST AND IS ISSUED IN STRICT CONFIDENCE THAT IT WILL NOT BE REPRODUCED IN ANY WAY OR USED TO SOLICIT BUSINESS OF A COMPETITIVE NATURE. DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED UNLESS WRITTEN CONSENT IS OBTAINED FROM MILSPECWEST. THIS DOCUMENT IS SUITABLE FOR ENGINEERING EVALUATION AND MAY BE USED IN TECHNICAL SPECIFICATIONS.

REVISION HISTORY		
REVISION	DATE	COMMENT
0	02/17/2017	

NOTES:
1. MATERIALS: "G" STYLE
   - 1.1 SHELL, FERRULE
     BRASS PER QQ-B-626
     FINISH: GOLD, OVER
     ELECTROLESS NICKEL
     PER MIL-G-45204, TYP 2, CLASS 1
   - 1.2 INSERT
     PEEK, GLASS FILLED PER
     MIL-P-46183
   - 1.3 CONTACTS
     COPPER ALLOY
     FINISH: GOLD PER MIL-G-45204
   - 1.4 GASKETS
     SILICONE RUBBER PER AMS 3304
   - 1.5 ALTERNATE SHELL MATERIALS AND FINISHES:
     "M" STYLE: BRASS, WITH
     ELECTROLESS NICKEL FINISH
     PER AMS-C-26074, CLASS 4, GRADE B
     "A" STYLE: BRASS, WITH GOLD PLATE,
     BLACK CHROMATE
     "K" STYLE: STAINLESS STEEL,
     300 SERIES, WITH PASSIVATION

PART NUMBER BREAKDOWN

MSW - G - F - 04 P

P = PIN
S = SOCKET

NUMBER OF CONTACTS
02
03
04

SHELL SIZE (SEE TABLE 2)
BODY STYLE
B = PLUG
R = IN LINE RECEPTACLE
C = STRAIGHT PCB MOUNT
D = FRONT PANEL JAM NUT MOUNT
E = FRONT PANEL SOLDER MOUNT
F = RIGHT ANGLE PCB MOUNT

FINISH AND MATERIAL
G = BRASS WITH GOLD OVER ELEC NICKEL
M = BRASS WITH ELECTROLESS NICKEL
A = BRASS WITH BLACK ANODIZE
K = STAINLESS STEEL WITH PASSIVATION

BASIC PART NUMBER

SPECIFICATIONS:

ELECTRICAL:

ELECTRICAL RESISTANCE:	10,000 M OHMS PER MIL-C-22557
RATED WORKING VOLTAGE:	400V @ SEA LEVEL
DIELECTRICWITHSTANDING:	1,000 V @ SEA LEVEL PER MIL-C-22557
CONTACT VOLTAGE DROP:	4 mV @ 1 AMP PER MIL-C-22557
CONTACT RESISTANCE:	4 MOHM @ 1 AMP PER MIL-C-22557
CONTACT CURRENT RATING:	3 AMP

ENVIRONMENTAL:

VIBRATION:	MIL STD 202A METHOD 204 TEST COND B(15G's) NO DISCONTINUITY IN EXCESS OF 1 MICROSECOND
SHOCK:	MIL STD 202 METHOD 202, 300 G's NO EVIDENCE OF DAMAGE
TEMPERATURE CYCLING:	MIL STD 202 METHOD 102, CONDITION C
CORROSION (SALT SPRAY):	MIL STD 202 METHOD 10,COND B 5% SALT SOLUTION
MOISTURE RESISTANCE:	MIL STD 202C METHOD 106B, OMITTING STEO 7B AND HIGH HUMIDITY TESTS

MECHANICAL:

CONTACTS:	CONTACTS ARE CONTRAINED IN BOTH DIRECTIONS
ENGAGING FORCE:	0.8NPER CONTACT
COUPLING RETENTION TORQUE:	60 Nmm
CONTACT DURABILITY:	5000 CYCLES WITHH CONTACT RESISTANCE WITHIN MIN MIL-C-22557
CABLE RETENTION:	SEPARATION FORCE EQUAL TO BREAKING STRENGTH OF SHIELD OF THE CABLE PER MIL-C-22557

THIS DOCUMENT IS SOLE PROPERTY OF MILSPECWEST AND IS ISSUED IN STRICT CONFIDENCE THAT IT WILL NOT BE REPRODUCED IN ANY WAY OR USED TO SOLICIT BUSINESS OF A COMPETITIVE NATURE. DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED UNLESS WRITTEN CONSENT IS OBTAINED FROM MILSPECWEST. THIS DOCUMENT IS SUITABLE FOR ENGINEERING EVALUATION AND MAY BE USED IN TECHNICAL SPECIFICATIONS.

UNLESS OTHERWISE NOTED:
DIMENSIONS ARE IN MILLIMETERS
DO NOT SCALE THIS DRAWING

.X DECIMALS ARE ±0.5
.XX DECIMALS ARE ±0.25
.XXX DECIMALS ARE ±0.13

ANGLES ARE ±0.5°

DRAWING	SC	MILSPECWEST - MICRO PRODUCTS **CAGE CODE: 3HD49**
CHECKED	TS	DESCRIPTION: **MICRO 90 DEG PCB RECEPTACLE**
Q.A.	KB	DWG. NO. **MSW-*-F-*** / REVISION: 0 / SHEET 2 OF 2