DDR2 SDRAM SODIMM


MT4HTF3264HZ – 256MB
MT4HTF6464HZ – 512MB
MT4HTF12864HZ – 1GB

Features

- 200-pin, small-outline dual in-line memory module (SODIMM)
- Fast data transfer rates: PC2-3200, PC2-4200, PC2-5300, or PC2-6400
- 256MB (32 Meg x 64), 512MB (64 Meg x 64), 1GB (128 Meg x 64)
- $V_{DD} = V_{DDQ} = 1.8V$
- $V_{DDSPD} = 1.7–3.6V$
- JEDEC-standard 1.8V I/O (SSTL_18-compatible)
- Differential data strobe (DQS, DQS#) option
- 4*n*-bit prefetch architecture
- Multiple internal device banks for concurrent operation
- Programmable CAS latency (CL)
- Posted CAS additive latency (AL)
- WRITE latency = READ latency - 1 ^{t}CK
- Programmable burst lengths (BL): 4 or 8
- Adjustable data-output drive strength
- 64ms, 8192-cycle refresh
- On-die termination (ODT)
- Halogen-free
- Serial presence detect (SPD) with EEPROM
- Gold edge contacts
- Single rank

Figure 1: 200-Pin SODIMM (MO-224 R/C C)

Module height: 30mm (1.181in)

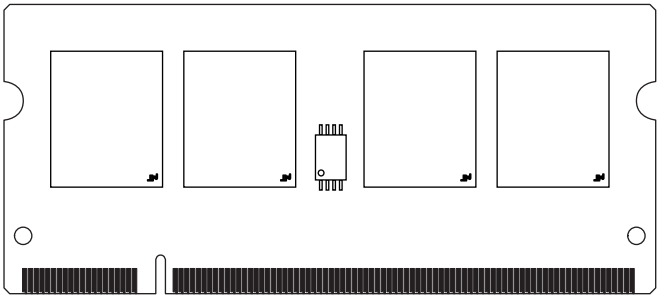

Options — Marking

- Operating temperature
  - Commercial (0°C ≤ T_A ≤ +70°C) — None
  - Industrial (–40°C ≤ T_A ≤ +85°C)[1] — I
- Package
  - 200-pin DIMM (halogen-free) — Z
- Frequency/CL[2]
  - 2.5ns @ CL = 5 (DDR2-800) — -80E
  - 2.5ns @ CL = 6 (DDR2-800) — -800
  - 3.0ns @ CL = 5 (DDR2-667) — -667

Notes:
1. Contact Micron for industrial temperature module offerings.
2. CL = CAS (READ) latency.

Table 1: Key Timing Parameters

Speed Grade	Industry Nomenclature	Data Rate (MT/s)				^{t}RCD (ns)	^{t}RP (ns)	^{t}RC (ns)
		CL = 6	CL = 5	CL = 4	CL = 3			
-80E	PC2-6400	800	800	533	400	12.5	12.5	55
-800	PC2-6400	800	667	533	400	15	15	55
-667	PC2-5300	–	667	553	400	15	15	55
-53E	PC2-4200	–	–	553	400	15	15	55
-40E	PC2-3200	–	–	400	400	15	15	55

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2009 Micron Technology, Inc. All rights reserved.
Products and specifications discussed herein are subject to change by Micron without notice.

Table 2: Addressing

Parameter	256MB	512MB	1GB
Refresh count	8K	8K	8K
Row address	8K A[12:0]	8K A[12:0]	16K A[13:0]
Device bank address	4 BA[1:0]	8 BA[2:0]	8 BA[2:0]
Device configuration	512Mb (32 Meg x 16)	1Gb (64 Meg x 16)	2Gb (128 Meg x16)
Column address	1K A[9:0]	1K A[9:0]	1K A[9:0]
Module rank address	1 S0#	1 S0#	1 S0#

Table 3: Part Numbers and Timing Parameters – 256MB

Base device: MT47H32M16,[1] 512Mb DDR2 SDRAM

Part Number[2]	Module Density	Configuration	Module Bandwidth	Memory Clock/ Data Rate	Clock Cycles (CL-^{t}RCD-^{t}RP)
MT4HTF3264H(I)Z-80E__	256MB	32 Meg x 64	6.4 GB/s	2.5ns/800 MT/s	5-5-5
MT4HTF3264H(I)Z-800__	256MB	32 Meg x 64	6.4 GB/s	2.5ns/800 MT/s	6-6-6
MT4HTF3264H(I)Z-667__	256MB	32 Meg x 64	5.3 GB/s	3.0ns/667 MT/s	5-5-5

Table 4: Part Numbers and Timing Parameters – 512MB

Base device: MT47H64M16,[1] 1Gb DDR2 SDRAM

Part Number[2]	Module Density	Configuration	Module Bandwidth	Memory Clock/ Data Rate	Clock Cycles (CL-^{t}RCD-^{t}RP)
MT4HTF6464H(I)Z-80E__	512MB	64 Meg x 64	6.4 GB/s	2.5ns/800 MT/s	5-5-5
MT4HTF6464H(I)Z-800__	512MB	64 Meg x 64	6.4 GB/s	2.5ns/800 MT/s	6-6-6
MT4HTF6464H(I)Z-667__	512MB	64 Meg x 64	5.3 GB/s	3.0ns/667 MT/s	5-5-5

Table 5: Part Numbers and Timing Parameters – 1GB Modules

Base device: MT47H128M16,[1] 2Gb DDR2 SDRAM

Part Number[2]	Module Density	Configuration	Module Bandwidth	Memory Clock/ Data Rate	Clock Cycles (CL-^{t}RCD-^{t}RP)
MT4HTF12864H(I)Z-80E__	1GB	128 Meg x 64	6.4 GB/s	2.5ns/800 MT/s	5-5-5
MT4HTF12864H(I)Z-800__	1GB	128 Meg x 64	6.4 GB/s	2.5ns/800 MT/s	6-6-6
MT4HTF12864H(I)Z-667__	1GB	128 Meg x 64	5.3 GB/s	3.0ns/667 MT/s	5-5-5

Notes:
1. The data sheet for the base device can be found on Micron's Web site.
2. All part numbers end with a two-place code (not shown) that designates component and PCB revisions. Consult factory for current revision codes. Example: MT4HTF6464HZ-667H1.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2009 Micron Technology, Inc. All rights reserved.

Pin Assignments

Table 6: Pin Assignments

200-Pin DDR2 SODIMM Front								200-Pin DDR2 SODIMM Back							
Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol
1	V_{REF}	51	DQS2	101	A1	151	DQ42	2	V_{SS}	52	DM2	102	A0	152	DQ46
3	V_{SS}	53	V_{SS}	103	V_{DD}	153	DQ43	4	DQ4	54	V_{SS}	104	V_{DD}	154	DQ47
5	DQ0	55	DQ18	105	A10	155	V_{SS}	6	DQ5	56	DQ22	106	BA1	156	V_{SS}
7	DQ1	57	DQ19	107	BA0	157	DQ48	8	V_{SS}	58	DQ23	108	RAS#	158	DQ52
9	V_{SS}	59	V_{SS}	109	WE#	159	DQ49	10	DM0	60	V_{SS}	110	S0#	160	DQ53
11	DQS0#	61	DQ24	111	V_{DD}	161	V_{SS}	12	V_{SS}	62	DQ28	112	V_{DD}	162	V_{SS}
13	DQS0	63	DQ25	113	CAS#	163	NC	14	DQ6	64	DQ29	114	ODT0	164	CK1
15	V_{SS}	65	V_{SS}	115	NC	165	V_{SS}	16	DQ7	66	V_{SS}	116	NC/A13[2]	166	CK1#
17	DQ2	67	DM3	117	V_{DD}	167	DQS6#	18	V_{SS}	68	DQS3#	118	V_{DD}	168	V_{SS}
19	DQ3	69	NC	119	NC	169	DQS6	20	DQ12	70	DQS3	120	NC	170	DM6
21	V_{SS}	71	V_{SS}	121	V_{SS}	171	V_{SS}	22	DQ13	72	V_{SS}	122	V_{SS}	172	V_{SS}
23	DQ8	73	DQ26	123	DQ32	173	DQ50	24	V_{SS}	74	DQ30	124	DQ36	174	DQ54
25	DQ9	75	DQ27	125	DQ33	175	DQ51	26	DM1	76	DQ31	126	DQ37	176	DQ55
27	V_{SS}	77	V_{SS}	127	V_{SS}	177	V_{SS}	28	V_{SS}	78	V_{SS}	128	V_{SS}	178	V_{SS}
29	DQS1#	79	CKE0	129	DQS4#	179	DQ56	30	CK0	80	NC	130	DM4	180	DQ60
31	DQS1	81	V_{DD}	131	DQS4	181	DQ57	32	CK0#	82	V_{DD}	132	V_{SS}	182	DQ61
33	V_{SS}	83	NC	133	V_{SS}	183	V_{SS}	34	V_{SS}	84	NC	134	DQ38	184	V_{SS}
35	DQ10	85	NC/BA2[1]	135	DQ34	185	DM7	36	DQ14	86	NC	136	DQ39	186	DQS7#
37	DQ11	87	V_{DD}	137	DQ35	187	V_{SS}	38	DQ15	88	V_{DD}	138	V_{SS}	188	DQS7
39	V_{SS}	89	A12	139	V_{SS}	189	DQ58	40	V_{SS}	90	A11	140	DQ44	190	V_{SS}
41	V_{SS}	91	A9	141	DQ40	191	DQ59	42	V_{SS}	92	A7	142	DQ45	192	DQ62
43	DQ16	93	A8	143	DQ41	193	V_{SS}	44	DQ20	94	A6	144	V_{SS}	194	DQ63
45	DQ17	95	V_{DD}	145	V_{SS}	195	SDA	46	DQ21	96	V_{DD}	146	DQS5#	196	V_{SS}
47	V_{SS}	97	A5	147	DM5	197	SCL	48	V_{SS}	98	A4	148	DQS5	198	SA0
49	DQS2#	99	A3	149	V_{SS}	199	V_{DDSPD}	50	NC	100	A2	150	V_{SS}	200	SA1

Notes: 1. Pin 85 is NC for 256MB, BA2 for 512MB and 1GB.
2. Pin 116 is NC for 256MB and 512MB, A13 for 1GB.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2009 Micron Technology, Inc. All rights reserved.

Pin Descriptions

The pin description table below is a comprehensive list of all possible pins for all DDR2 modules. All pins listed may not be supported on this module. See Pin Assignments for information specific to this module.

Table 7: Pin Descriptions

Symbol	Type	Description
Ax	Input	**Address inputs:** Provide the row address for ACTIVE commands, and the column address and auto precharge bit (A10) for READ/WRITE commands, to select one location out of the memory array in the respective bank. A10 sampled during a PRECHARGE command determines whether the PRECHARGE applies to one bank (A10 LOW, bank selected by BAx) or all banks (A10 HIGH). The address inputs also provide the op-code during a LOAD MODE command. See the Pin Assignments Table for density-specific addressing information.
BAx	Input	**Bank address inputs:** Define the device bank to which an ACTIVE, READ, WRITE, or PRECHARGE command is being applied. BA define which mode register (MR0, MR1, MR2, and MR3) is loaded during the LOAD MODE command.
CKx, CK#x	Input	**Clock:** Differential clock inputs. All control, command, and address input signals are sampled on the crossing of the positive edge of CK and the negative edge of CK#.
CKEx	Input	**Clock enable:** Enables (registered HIGH) and disables (registered LOW) internal circuitry and clocks on the DDR2 SDRAM.
DMx,	Input	**Data mask (x8 devices only):** DM is an input mask signal for write data. Input data is masked when DM is sampled HIGH, along with that input data, during a write access. Although DM pins are input-only, DM loading is designed to match that of the DQ and DQS pins.
ODTx	Input	**On-die termination:** Enables (registered HIGH) and disables (registered LOW) termination resistance internal to the DDR2 SDRAM. When enabled in normal operation, ODT is only applied to the following pins: DQ, DQS, DQS#, DM, and CB. The ODT input will be ignored if disabled via the LOAD MODE command.
Par_In	Input	**Parity input:** Parity bit for Ax, RAS#, CAS#, and WE#.
RAS#, CAS#, WE#	Input	**Command inputs:** RAS#, CAS#, and WE# (along with S#) define the command being entered.
RESET#	Input	**Reset:** Asynchronously forces all registered outputs LOW when RESET# is LOW. This signal can be used during power-up to ensure that CKE is LOW and DQ are High-Z.
S#x	Input	**Chip select:** Enables (registered LOW) and disables (registered HIGH) the command decoder.
SAx	Input	**Serial address inputs:** Used to configure the SPD EEPROM address range on the I^2C bus.
SCL	Input	**Serial clock for SPD EEPROM:** Used to synchronize communication to and from the SPD EEPROM on the I^2C bus.
CBx	I/O	**Check bits.** Used for system error detection and correction.
DQx	I/O	**Data input/output:** Bidirectional data bus.
DQSx, DQS#x	I/O	**Data strobe:** Travels with the DQ and is used to capture DQ at the DRAM or the controller. Output with read data; input with write data for source synchronous operation. DQS# is only used when differential data strobe mode is enabled via the LOAD MODE command.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2009 Micron Technology, Inc. All rights reserved.


Table 7: Pin Descriptions (Continued)

Symbol	Type	Description
SDA	I/O	**Serial data:** Used to transfer addresses and data into and out of the SPD EEPROM on the I^2C bus.
RDQSx, RDQS#x	Output	**Redundant data strobe (x8 devices only):** RDQS is enabled/disabled via the LOAD MODE command to the extended mode register (EMR). When RDQS is enabled, RDQS is output with read data only and is ignored during write data. When RDQS is disabled, RDQS becomes data mask (see DMx). RDQS# is only used when RDQS is enabled and differential data strobe mode is enabled.
Err_Out#	Output (open drain)	**Parity error output:** Parity error found on the command and address bus.
V_{DD}/V_{DDQ}	Supply	**Power supply:** 1.8V ±0.1V. The component V_{DD} and V_{DDQ} are connected to the module V_{DD}.
V_{DDSPD}	Supply	**SPD EEPROM power supply:** 1.7–3.6V.
V_{REF}	Supply	**Reference voltage:** $V_{DD}/2$.
V_{SS}	Supply	Ground.
NC	–	**No connect:** These pins are not connected on the module.
NF	–	**No function:** These pins are connected within the module, but provide no functionality.
NU	–	**Not used:** These pins are not used in specific module configurations/operations.
RFU	–	Reserved for future use.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2009 Micron Technology, Inc. All rights reserved.

Functional Block Diagram

Figure 2: Functional Block Diagram

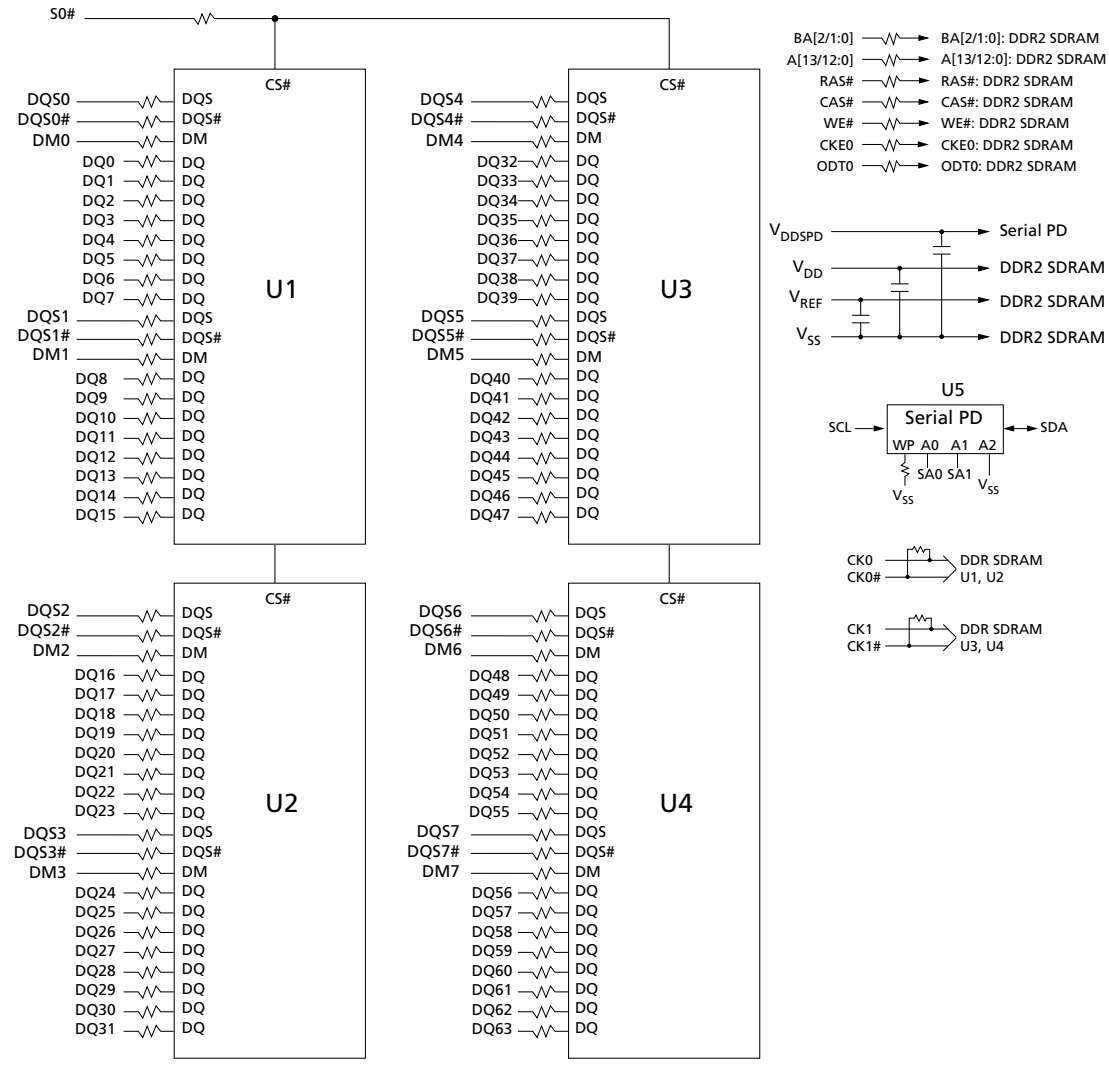

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2009 Micron Technology, Inc. All rights reserved.

General Description

DDR2 SDRAM modules are high-speed, CMOS dynamic random access memory modules that use internally configured 4 or 8-bank DDR2 SDRAM devices. DDR2 SDRAM modules use DDR architecture to achieve high-speed operation. DDR2 architecture is essentially a 4*n*-prefetch architecture with an interface designed to transfer two data words per clock cycle at the I/O pins. A single read or write access for the DDR2 SDRAM module effectively consists of a single 4*n*-bit-wide, one-clock-cycle data transfer at the internal DRAM core and eight corresponding *n*-bit-wide, one-half-clock-cycle data transfers at the I/O pins.

DDR2 modules use two sets of differential signals: DQS, DQS# to capture data and CK and CK# to capture commands, addresses, and control signals. Differential clocks and data strobes ensure exceptional noise immunity for these signals and provide precise crossing points to capture input signals. A bidirectional data strobe (DQS, DQS#) is transmitted externally, along with data, for use in data capture at the receiver. DQS is a strobe transmitted by the DDR2 SDRAM device during READs and by the memory controller during WRITEs. DQS is edge-aligned with data for READs and center-aligned with data for WRITEs.

DDR2 SDRAM modules operate from a differential clock (CK and CK#); the crossing of CK going HIGH and CK# going LOW will be referred to as the positive edge of CK. Commands (address and control signals) are registered at every positive edge of CK. Input data is registered on both edges of DQS, and output data is referenced to both edges of DQS, as well as to both edges of CK.

Serial Presence-Detect EEPROM Operation

DDR2 SDRAM modules incorporate serial presence-detect. The SPD data is stored in a 256-byte EEPROM. The first 128 bytes are programmed by Micron to identify the module type and various SDRAM organizations and timing parameters. The remaining 128 bytes of storage are available for use by the customer. System READ/WRITE operations between the master (system logic) and the slave EEPROM device occur via a standard I^2C bus using the DIMM's SCL (clock) SDA (data), and SA (address) pins. Write protect (WP) is connected to V_{SS}, permanently disabling hardware write protection.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2009 Micron Technology, Inc. All rights reserved.

Electrical Specifications

Stresses greater than those listed may cause permanent damage to the module. This is a stress rating only, and functional operation of the module at these or any other conditions outside those indicated in the device data sheet are not implied. Exposure to absolute maximum rating conditions for extended periods may adversely affect reliability.

Table 8: Absolute Maximum Ratings

Symbol	Parameter		Min	Max	Units
V_{DD}/V_{DDQ}	V_{DD}/V_{DDQ} supply voltage relative to V_{SS}		–0.5	2.3	V
V_{IN}, V_{OUT}	Voltage on any pin relative to V_{SS}		–0.5	2.3	V
I_I	Input leakage current; Any input 0V ≤ V_{IN} ≤ V_{DD}; V_{REF} input 0V ≤ V_{IN} ≤ 0.95V; (All other pins not under test = 0V)	Address inputs, RAS#, CAS#, WE#, S#, CKE, ODT, BA	–20	20	µA
		CK, CK#	–10	10	
		DM	–5	5	
I_{OZ}	Output leakage current; 0V ≤ V_{OUT} ≤ V_{DDQ}; DQ and ODT are disabled	DQ, DQS, DQS#	–5	5	µA
I_{VREF}	V_{REF} leakage current; V_{REF} = valid V_{REF} level		–8	8	µA
T_A	Module ambient operating temperature	Commercial	0	+70	°C
		Industrial	–40	+85	°C
T_C[1]	DDR2 SDRAM component operating temperature[2]	Commercial	0	+85	°C
		Industrial	–40	+95	°C

Notes:
1. The refresh rate is required to double when T_C exceeds 85°C.
2. For further information, refer to technical note TN-00-08: "Thermal Applications," available on Micron's Web site.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2009 Micron Technology, Inc. All rights reserved.

DRAM Operating Conditions

Recommended AC operating conditions are given in the DDR2 component data sheets. Component specifications are available on Micron's Web site. Module speed grades correlate with component speed grades.

Table 9: Module and Component Speed Grades

DDR2 components may exceed the listed module speed grades; module may not be available in all listed speed grades

Module Speed Grade	Component Speed Grade
-1GA	-187E
-80E	-25E
-800	-25
-667	-3
-53E	-37E
-40E	-5E

Design Considerations

Simulations

Micron memory modules are designed to optimize signal integrity through carefully designed terminations, controlled board impedances, routing topologies, trace length matching, and decoupling. However, good signal integrity starts at the system level. Micron encourages designers to simulate the signal characteristics of the system's memory bus to ensure adequate signal integrity of the entire memory system.

Power

Operating voltages are specified at the DRAM, not at the edge connector of the module. Designers must account for any system voltage drops at anticipated power levels to ensure the required supply voltage is maintained.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2009 Micron Technology, Inc. All rights reserved.

I_{DD} Specifications

Table 10: DDR2 I_{DD} Specifications and Conditions – 256MB

Values shown for MT47H32M16 DDR2 SDRAM only and are computed from values specified in the 512Mb (32 Meg x 16) component data sheet

Parameter		Symbol	-80E/ -800	-667	Units
Operating one bank active-precharge current: $^tCK = ^tCK (I_{DD})$, $^tRC = ^tRC (I_{DD})$, $^tRAS = ^tRAS$ MIN (I_{DD}); CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are switching; Data bus inputs are switching		I_{DD0}	540	480	mA
Operating one bank active-read-precharge current: I_{OUT} = 0mA; BL = 4, CL = CL (I_{DD}), AL = 0; $^tCK = ^tCK (I_{DD})$, $^tRC = ^tRC (I_{DD})$, $^tRAS = ^tRAS$ MIN (I_{DD}), $^tRCD = ^tRCD (I_{DD})$; CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are switching; Data pattern is same as I_{DD4W}		I_{DD1}	660	600	mA
Precharge power-down current: All device banks idle; $^tCK = ^tCK (I_{DD})$; CKE is LOW; Other control and address bus inputs are stable; Data bus inputs are floating		I_{DD2P}	28	28	mA
Precharge quiet standby current: All device banks idle; $^tCK = ^tCK (I_{DD})$; CKE is HIGH, S# is HIGH; Other control and address bus inputs are stable; Data bus inputs are floating		I_{DD2Q}	260	220	mA
Precharge standby current: All device banks idle; $^tCK = ^tCK (I_{DD})$; CKE is HIGH, S# is HIGH; Other control and address bus inputs are switching; Data bus inputs are switching		I_{DD2N}	280	240	mA
Active power-down current: All device banks open; $^tCK = ^tCK (I_{DD})$; CKE is LOW; Other control and address bus inputs are stable; Data bus inputs are floating	Fast PDN exit MR[12] = 0	I_{DD3P}	160	140	mA
	Slow PDN exit MR[12] = 1		48	48	
Active standby current: All device banks open; $^tCK = ^tCK (I_{DD})$, $^tRAS = ^tRAS$ MAX (I_{DD}), $^tRP = ^tRP (I_{DD})$; CKE is HIGH, S# is HIGH between valid commands; Other control and address bus inputs are switching; Data bus inputs are switching		I_{DD3N}	300	280	mA
Operating burst write current: All device banks open; Continuous burst writes; BL = 4, CL = CL (I_{DD}), AL = 0; $^tCK = ^tCK (I_{DD})$, $^tRAS = ^tRAS$ MAX (I_{DD}), $^tRP = ^tRP (I_{DD})$; CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are switching; Data bus inputs are switching		I_{DD4W}	1180	1000	mA
Operating burst read current: All device banks open; Continuous burst read, I_{OUT} = 0mA; BL = 4, CL = CL (I_{DD}), AL = 0; $^tCK = ^tCK (I_{DD})$, $^tRAS = ^tRAS$ MAX (I_{DD}), $^tRP = ^tRP$ (I_{DD}); CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are switching; Data bus inputs are switching		I_{DD4R}	1100	940	mA
Burst refresh current: $^tCK = ^tCK (I_{DD})$; REFRESH command at every $^tRFC (I_{DD})$ interval; CKE is HIGH, S# is HIGH between valid commands; Other control and address bus inputs are switching; Data bus inputs are switching		I_{DD5}	920	740	mA
Self refresh current: CK and CK# at 0V; CKE ≤ 0.2V; Other control and address bus inputs are floating; Data bus inputs are floating		I_{DD6}	28	28	mA
Operating bank interleave read current: All device banks interleaving reads; I_{OUT} = 0mA; BL = 4, CL = CL (I_{DD}), AL = $^tRCD (I_{DD})$ - 1 × $^tCK (I_{DD})$; $^tCK = ^tCK (I_{DD})$, $^tRC = ^tRC$ (I_{DD}), $^tRRD = ^tRRD (I_{DD})$, $^tRCD = ^tRCD (I_{DD})$; CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are stable during deselects; Data bus inputs are switching		I_{DD7}	1480	1400	mA

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2009 Micron Technology, Inc. All rights reserved.

Table 11: DDR2 I_{DD} Specifications and Conditions – 512MB (Die Revision E and G)

Values shown for MT47H64M16 DDR2 SDRAM only and are computed from values specified in the 1Gb (64 Meg x 16) component data sheet

Parameter		Symbol	-80E/ -800	-667	Units
Operating one bank active-precharge current: $^{t}CK = {}^{t}CK (I_{DD})$, $^{t}RC = {}^{t}RC (I_{DD})$, $^{t}RAS = {}^{t}RAS\ MIN (I_{DD})$; CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are switching; Data bus inputs are switching		I_{DD0}	600	540	mA
Operating one bank active-read-precharge current: I_{OUT} = 0mA; BL = 4, CL = CL (I_{DD}), AL = 0; $^{t}CK = {}^{t}CK (I_{DD})$, $^{t}RC = {}^{t}RC (I_{DD})$, $^{t}RAS = {}^{t}RAS\ MIN (I_{DD})$, $^{t}RCD = {}^{t}RCD (I_{DD})$; CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are switching; Data pattern is same as I_{DD4W}		I_{DD1}	700	520	mA
Precharge power-down current: All device banks idle; $^{t}CK = {}^{t}CK (I_{DD})$; CKE is LOW; Other control and address bus inputs are stable; Data bus inputs are floating		I_{DD2P}	28	28	mA
Precharge quiet standby current: All device banks idle; $^{t}CK = {}^{t}CK (I_{DD})$; CKE is HIGH, S# is HIGH; Other control and address bus inputs are stable; Data bus inputs are floating		I_{DD2Q}	300	260	mA
Precharge standby current: All device banks idle; $^{t}CK = {}^{t}CK (I_{DD})$; CKE is HIGH, S# is HIGH; Other control and address bus inputs are switching; Data bus inputs are switching		I_{DD2N}	320	280	mA
Active power-down current: All device banks open; $^{t}CK = {}^{t}CK$ (I_{DD}); CKE is LOW; Other control and address bus inputs are stable; Data bus inputs are floating	Fast PDN exit MR[12] = 0	I_{DD3P}	160	120	mA
	Slow PDN exit MR[12] = 1		40	40	
Active standby current: All device banks open; $^{t}CK = {}^{t}CK (I_{DD})$, $^{t}RAS = {}^{t}RAS\ MAX$ (I_{DD}), $^{t}RP = {}^{t}RP (I_{DD})$; CKE is HIGH, S# is HIGH between valid commands; Other control and address bus inputs are switching; Data bus inputs are switching		I_{DD3N}	340	300	mA
Operating burst write current: All device banks open; Continuous burst writes; BL = 4, CL = CL (I_{DD}), AL = 0; $^{t}CK = {}^{t}CK (I_{DD})$, $^{t}RAS = {}^{t}RAS\ MAX (I_{DD})$, $^{t}RP = {}^{t}RP (I_{DD})$; CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are switching; Data bus inputs are switching		I_{DD4W}	1260	800	mA
Operating burst read current: All device banks open; Continuous burst read, I_{OUT} = 0mA; BL = 4, CL = CL (I_{DD}), AL = 0; $^{t}CK = {}^{t}CK (I_{DD})$, $^{t}RAS = {}^{t}RAS\ MAX (I_{DD})$, $^{t}RP = {}^{t}RP$ (I_{DD}); CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are switching; Data bus inputs are switching		I_{DD4R}	1280	880	mA
Burst refresh current: $^{t}CK = {}^{t}CK (I_{DD})$; REFRESH command at every $^{t}RFC (I_{DD})$ interval; CKE is HIGH, S# is HIGH between valid commands; Other control and address bus inputs are switching; Data bus inputs are switching		I_{DD5}	1200	1080	mA
Self refresh current: CK and CK# at 0V; CKE ≤ 0.2V; Other control and address bus inputs are floating; Data bus inputs are floating		I_{DD6}	28	28	mA
Operating bank interleave read current: All device banks interleaving reads; I_{OUT} = 0mA; BL = 4, CL = CL (I_{DD}), AL = $^{t}RCD (I_{DD})$ - 1 × $^{t}CK (I_{DD})$; $^{t}CK = {}^{t}CK (I_{DD})$, $^{t}RC = {}^{t}RC$ (I_{DD}), $^{t}RRD = {}^{t}RRD (I_{DD})$, $^{t}RCD = {}^{t}RCD (I_{DD})$; CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are stable during deselects; Data bus inputs are switching		I_{DD7}	1760	1400	mA

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2009 Micron Technology, Inc. All rights reserved.

Table 12: DDR2 I_{DD} Specifications and Conditions – 512MB (Die Revision H)

Values shown for MT47H64M16 DDR2 SDRAM only and are computed from values specified in the 1Gb (64 Meg x 16) component data sheet

Parameter		Symbol	-80E/ -800	-667	Units
Operating one bank active-precharge current: $^tCK = {}^tCK (I_{DD})$, $^tRC = {}^tRC (I_{DD})$, $^tRAS = {}^tRAS$ MIN (I_{DD}); CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are switching; Data bus inputs are switching		I_{DD0}	320	300	mA
Operating one bank active-read-precharge current: I_{OUT} = 0mA; BL = 4, CL = CL (I_{DD}), AL = 0; $^tCK = {}^tCK (I_{DD})$, $^tRC = {}^tRC (I_{DD})$, $^tRAS = {}^tRAS$ MIN (I_{DD}), $^tRCD = {}^tRCD (I_{DD})$; CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are switching; Data pattern is same as I_{DD4W}		I_{DD1}	380	360	mA
Precharge power-down current: All device banks idle; $^tCK = {}^tCK (I_{DD})$; CKE is LOW; Other control and address bus inputs are stable; Data bus inputs are floating		I_{DD2P}	28	28	mA
Precharge quiet standby current: All device banks idle; $^tCK = {}^tCK (I_{DD})$; CKE is HIGH, S# is HIGH; Other control and address bus inputs are stable; Data bus inputs are floating		I_{DD2Q}	104	104	mA
Precharge standby current: All device banks idle; $^tCK = {}^tCK (I_{DD})$; CKE is HIGH, S# is HIGH; Other control and address bus inputs are switching; Data bus inputs are switching		I_{DD2N}	120	104	mA
Active power-down current: All device banks open; $^tCK = {}^tCK (I_{DD})$; CKE is LOW; Other control and address bus inputs are stable; Data bus inputs are floating	Fast PDN exit MR[12] = 0	I_{DD3P}	80	60	mA
	Slow PDN exit MR[12] = 1		40	40	
Active standby current: All device banks open; $^tCK = {}^tCK (I_{DD})$, $^tRAS = {}^tRAS$ MAX (I_{DD}), $^tRP = {}^tRP (I_{DD})$; CKE is HIGH, S# is HIGH between valid commands; Other control and address bus inputs are switching; Data bus inputs are switching		I_{DD3N}	140	128	mA
Operating burst write current: All device banks open; Continuous burst writes; BL = 4, CL = CL (I_{DD}), AL = 0; $^tCK = {}^tCK (I_{DD})$, $^tRAS = {}^tRAS$ MAX (I_{DD}), $^tRP = {}^tRP (I_{DD})$; CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are switching; Data bus inputs are switching		I_{DD4W}	640	540	mA
Operating burst read current: All device banks open; Continuous burst read, I_{OUT} = 0mA; BL = 4, CL = CL (I_{DD}), AL = 0; $^tCK = {}^tCK (I_{DD})$, $^tRAS = {}^tRAS$ MAX (I_{DD}), $^tRP = {}^tRP$ (I_{DD}); CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are switching; Data bus inputs are switching		I_{DD4R}	600	500	mA
Burst refresh current: $^tCK = {}^tCK (I_{DD})$; REFRESH command at every $^tRFC (I_{DD})$ interval; CKE is HIGH, S# is HIGH between valid commands; Other control and address bus inputs are switching; Data bus inputs are switching		I_{DD5}	600	580	mA
Self refresh current: CK and CK# at 0V; CKE ≤ 0.2V; Other control and address bus inputs are floating; Data bus inputs are floating		I_{DD6}	28	28	mA
Operating bank interleave read current: All device banks interleaving reads; I_{OUT} = 0mA; BL = 4, CL = CL (I_{DD}), AL = $^tRCD (I_{DD})$ - 1 × $^tCK (I_{DD})$; $^tCK = {}^tCK (I_{DD})$, $^tRC = {}^tRC$ (I_{DD}), $^tRRD = {}^tRRD (I_{DD})$, $^tRCD = {}^tRCD (I_{DD})$; CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are stable during deselects; Data bus inputs are switching		I_{DD7}	1040	920	mA

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2009 Micron Technology, Inc. All rights reserved.

Table 13: DDR2 I_{DD} Specifications and Conditions – 1GB

Values shown for MT47H128M16 DDR2 SDRAM only and are computed from values specified in the 2Gb (128 Meg x 16) component data sheet

Parameter		Symbol	-80E/ -800	-667	Units
Operating one bank active-precharge current: $^tCK = {}^tCK (I_{DD})$, $^tRC = {}^tRC (I_{DD})$, $^tRAS = {}^tRAS$ MIN (I_{DD}); CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are switching; Data bus inputs are switching		I_{DD0}	600	540	mA
Operating one bank active-read-precharge current: I_{OUT} = 0mA; BL = 4, CL = CL (I_{DD}), AL = 0; $^tCK = {}^tCK (I_{DD})$, $^tRC = {}^tRC (I_{DD})$, $^tRAS = {}^tRAS$ MIN (I_{DD}), $^tRCD = {}^tRCD (I_{DD})$; CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are switching; Data pattern is same as I_{DD4W}		I_{DD1}	720	640	mA
Precharge power-down current: All device banks idle; $^tCK = {}^tCK (I_{DD})$; CKE is LOW; Other control and address bus inputs are stable; Data bus inputs are floating		I_{DD2P}	48	48	mA
Precharge quiet standby current: All device banks idle; $^tCK = {}^tCK (I_{DD})$; CKE is HIGH, S# is HIGH; Other control and address bus inputs are stable; Data bus inputs are floating		I_{DD2Q}	300	260	mA
Precharge standby current: All device banks idle; $^tCK = {}^tCK (I_{DD})$; CKE is HIGH, S# is HIGH; Other control and address bus inputs are switching; Data bus inputs are switching		I_{DD2N}	320	280	mA
Active power-down current: All device banks open; $^tCK = {}^tCK (I_{DD})$; CKE is LOW; Other control and address bus inputs are stable; Data bus inputs are floating	Fast PDN exit MR[12] = 0	I_{DD3P}	180	160	mA
	Slow PDN exit MR[12] = 1		56	56	
Active standby current: All device banks open; $^tCK = {}^tCK (I_{DD})$, $^tRAS = {}^tRAS$ MAX (I_{DD}), $^tRP = {}^tRP (I_{DD})$; CKE is HIGH, S# is HIGH between valid commands; Other control and address bus inputs are switching; Data bus inputs are switching		I_{DD3N}	340	300	mA
Operating burst write current: All device banks open; Continuous burst writes; BL = 4, CL = CL (I_{DD}), AL = 0; $^tCK = {}^tCK (I_{DD})$, $^tRAS = {}^tRAS$ MAX (I_{DD}), $^tRP = {}^tRP (I_{DD})$; CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are switching; Data bus inputs are switching		I_{DD4W}	1080	1000	mA
Operating burst read current: All device banks open; Continuous burst read, I_{OUT} = 0mA; BL = 4, CL = CL (I_{DD}), AL = 0; $^tCK = {}^tCK (I_{DD})$, $^tRAS = {}^tRAS$ MAX (I_{DD}), $^tRP = {}^tRP$ (I_{DD}); CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are switching; Data bus inputs are switching		I_{DD4R}	1180	1100	mA
Burst refresh current: $^tCK = {}^tCK (I_{DD})$; REFRESH command at every $^tRFC (I_{DD})$ interval; CKE is HIGH, S# is HIGH between valid commands; Other control and address bus inputs are switching; Data bus inputs are switching		I_{DD5}	1200	1120	mA
Self refresh current: CK and CK# at 0V; CKE ≤ 0.2V; Other control and address bus inputs are floating; Data bus inputs are floating		I_{DD6}	48	48	mA
Operating bank interleave read current: All device banks interleaving reads; I_{OUT} = 0mA; BL = 4, CL = CL (I_{DD}), AL = $^tRCD (I_{DD})$ - 1 × $^tCK (I_{DD})$; $^tCK = {}^tCK (I_{DD})$, $^tRC = {}^tRC$ (I_{DD}), $^tRRD = {}^tRRD (I_{DD})$, $^tRCD = {}^tRCD (I_{DD})$; CKE is HIGH, S# is HIGH between valid commands; Address bus inputs are stable during deselects; Data bus inputs are switching		I_{DD7}	1780	1580	mA

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2009 Micron Technology, Inc. All rights reserved.

Serial Presence-Detect

For the latest SPD data, refer to Micron's SPD page: www.micron.com/SPD.

Table 14: SPD EEPROM Operating Conditions

Parameter/Condition	Symbol	Min	Max	Units
Supply voltage	V_{DDSPD}	1.7	3.6	V
Input high voltage: logic 1; All inputs	V_{IH}	V_{DDSPD} × 0.7	V_{DDSPD} + 0.5	V
Input low voltage: logic 0; All inputs	V_{IL}	–0.6	V_{DDSPD} × 0.3	V
Output low voltage: I_{OUT} = 3mA	V_{OL}	–	0.4	V
Input leakage current: V_{IN} = GND to V_{DD}	I_{LI}	0.1	3	µA
Output leakage current: V_{OUT} = GND to V_{DD}	I_{LO}	0.05	3	µA
Standby current	I_{SB}	1.6	4	µA
Power supply current, READ: SCL clock frequency = 100 kHz	I_{CCR}	0.4	1	mA
Power supply current, WRITE: SCL clock frequency = 100 kHz	I_{CCW}	2	3	mA

Table 15: SPD EEPROM AC Operating Conditions


Parameter/Condition	Symbol	Min	Max	Units	Notes
SCL LOW to SDA data-out valid	^{t}AA	0.2	0.9	µs	1
Time bus must be free before a new transition can start	^{t}BUF	1.3	–	µs	
Data-out hold time	^{t}DH	200	–	ns	
SDA and SCL fall time	^{t}F	–	300	ns	2
SDA and SCL rise time	^{t}R	–	300	ns	2
Data-in hold time	^{t}HD:DAT	0	–	µs	
Start condition hold time	^{t}HD:STA	0.6	–	µs	
Clock HIGH period	^{t}HIGH	0.6	–	µs	
Noise suppression time constant at SCL, SDA inputs	^{t}I	–	50	ns	
Clock LOW period	^{t}LOW	1.3	–	µs	
SCL clock frequency	^{t}SCL	–	400	kHz	
Data-in setup time	^{t}SU:DAT	100	–	ns	
Start condition setup time	^{t}SU:STA	0.6	–	µs	3
Stop condition setup time	^{t}SU:STO	0.6	–	µs	
WRITE cycle time	^{t}WRC	–	10	ms	4

Notes:
1. To avoid spurious start and stop conditions, a minimum delay is placed between SCL = 1 and the falling or rising edge of SDA.
2. This parameter is sampled.
3. For a restart condition or following a WRITE cycle.
4. The SPD EEPROM WRITE cycle time (^{t}WRC) is the time from a valid stop condition of a write sequence to the end of the EEPROM internal ERASE/PROGRAM cycle. During the WRITE cycle, the EEPROM bus interface circuit is disabled, SDA remains HIGH due to pull-up resistance, and the EEPROM does not respond to its slave address.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2009 Micron Technology, Inc. All rights reserved.

Module Dimensions

Figure 3: 200-Pin DDR2 SODIMM

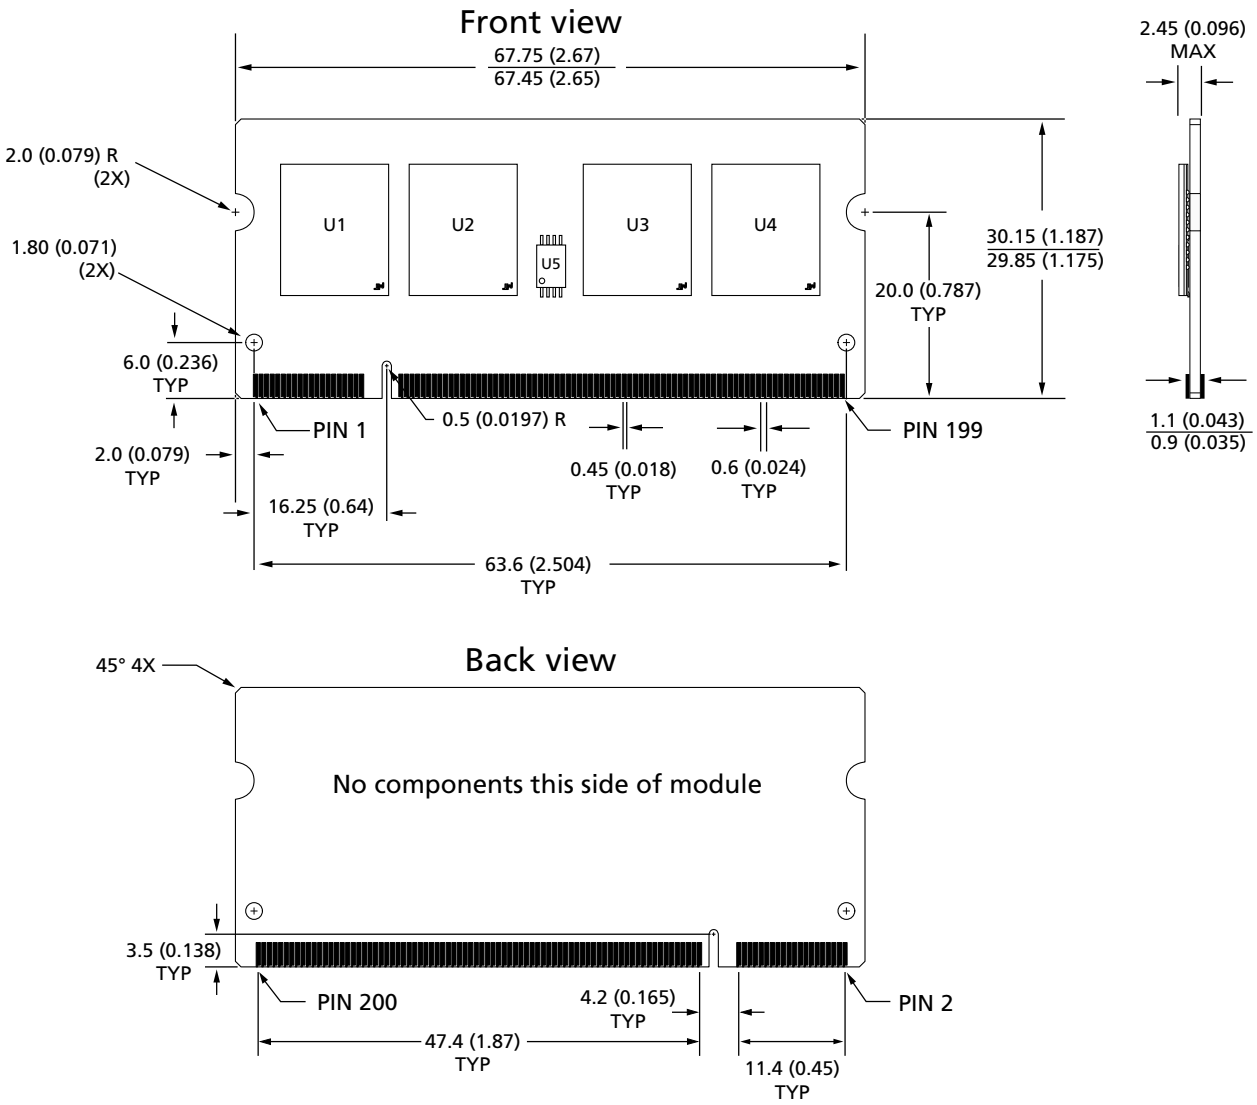

Notes:
1. All dimensions are in millimeters (inches); MAX/MIN or typical (TYP) where noted.
2. The dimensional diagram is for reference only. Refer to the JEDEC MO document for additional design dimensions.

8000 S. Federal Way, P.O. Box 6, Boise, ID 83707-0006, Tel: 208-368-3900
www.micron.com/productsupport Customer Comment Line: 800-932-4992
Micron and the Micron logo are trademarks of Micron Technology, Inc.
All other trademarks are the property of their respective owners.
This data sheet contains minimum and maximum limits specified over the power supply and temperature range set forth herein. Although considered final, these specifications are subject to change, as further product development and data characterization sometimes occur.

Micron Technology, Inc. reserves the right to change products or specifications without notice.
© 2009 Micron Technology, Inc. All rights reserved.