Inductors

For Power Line
SMD

NLFC Series NLFC2016 Type

FEATURES

- The product has good heat durability that withstands lead-free compatible reflow soldering conditions.
- Lead-free material is used for the plating on the terminal.
- The NLFC series features magnetic shielding and is recommended for power supply line applications.
- This product conforms to the standards that are slated to be introduced under the RoHS Directive.

APPLICATIONS


- Audio-visual equipment including TVs, VCRs and digital cameras.
- Electronic equipment used in communication infrastructures including xDSL and mobile base stations.
- Other electronic equipment including HDDs and ODDs.

SPECIFICATIONS


Operating temperature range	–40 to +85°C [Including self-temperature rise]
Storage temperature range	–40 to +85°C

RECOMMENDED SOLDERING CONDITIONS

REFLOW SOLDERING

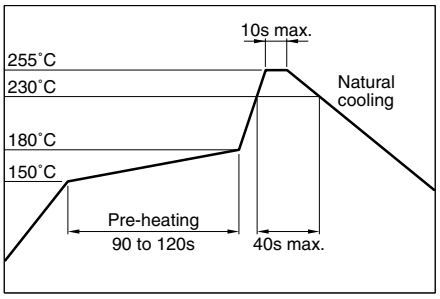

FLOW SOLDERING

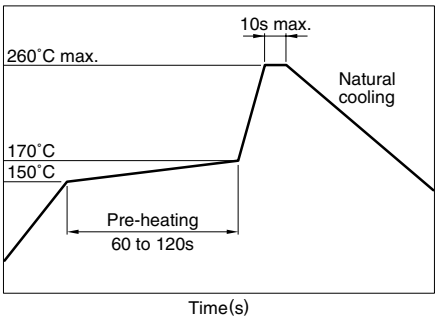

IRON SOLDERING

Tip temperature	300 to 350°C
Heating time	3 seconds/soldering
Soldering rod specifications	Output: 30W Tip diameter: 1mm

- Based on the above conditions, use a maximum product temperature of 260°C and a maximum accumulated heating time of 10 seconds as a guideline.
- Please contact us for details.

PRODUCT IDENTIFICATION

NLFC	201614	T-	2R2	M	-PF
(1)	(2)	(3)	(4)	(5)	(6)

(1)Series name

(2)Dimensions

201614	2.1×1.6×1.4mm (L×W×T)

(3)Packaging style

T	Taping (reel)

(4)Inductance value

1R0	1μH
220	22μH

(5)Inductance tolerance

K	±10%
M	±20%

(6) Lead-free compatible product

PF	Lead-free compatible product

PACKAGING STYLE AND QUANTITIES

Packaging style	Quantity
Taping	2000 pieces/reel


- Regarding RoHS Directive conformity: This claim is based on the individual judgment made by TDK Corporation that this product conforms to EU Directive 2002/95/EC. This does not constitute a guarantee that the product conforms to all laws and regulations based on the RoHS Directive enacted in individual EU member states.

Inductors


For Power Line
SMD

NLFC Series NLFC2016 Type

SHAPES AND DIMENSIONS/RECOMMENDED PC BOARD PATTERN

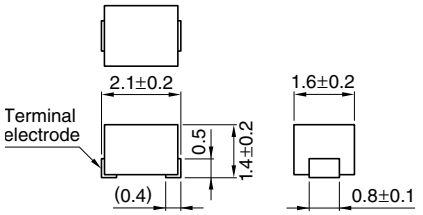

Weight: 15mg



Dimensions in mm



ELECTRICAL CHARACTERISTICS


Inductance (µH)	Inductance tolerance	Q ref.	Test frequency L, Q (MHz)	Self-resonant frequency (MHz)min.	DC resistance (Ω)±30%	Rated current* (mA)max.	Part No.
1	±20%	5	7.96	100	0.16	300	NLFC201614T-1R0M-PF
2.2	±20%	5	7.96	80	0.23	240	NLFC201614T-2R2M-PF
4.7	±20%	5	7.96	45	0.4	150	NLFC201614T-4R7M-PF
10	±10%	10	2.52	32	0.7	120	NLFC201614T-100K-PF
22	±10%	10	2.52	16	1.7	75	NLFC201614T-220K-PF

* Rated current: Value obtained when current flows and the temperature has risen to 20°C or when DC current flows and the initial value of inductance has fallen by 10%, whichever is smaller.


- Test equipment L, Q: YHP4194A IMPEDANCE ANALYZER+YHP16085A+YHP16093B+TF-1, or equivalent
  SRF: HP8753C NETWORK ANALYZER (Zin=Zout=50Ω), or equivalent
  Rdc: MATSUSHITA VP-2941A DIGITAL MILLIOHM METER, or equivalent

TYPICAL ELECTRICAL CHARACTERISTICS


INDUCTANCE vs. FREQUENCY CHARACTERISTICS

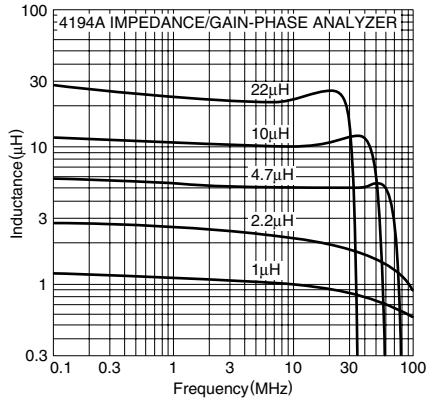

IMPEDANCE vs. FREQUENCY CHARACTERISTICS

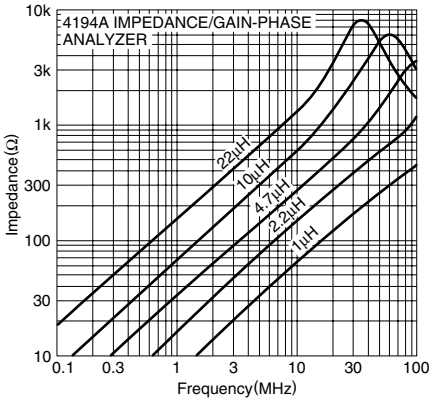

INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS

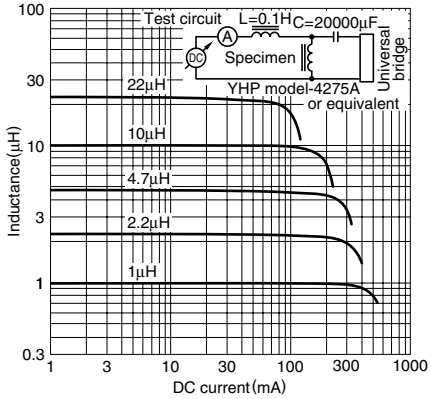

Q vs. FREQUENCY CHARACTERISTICS

