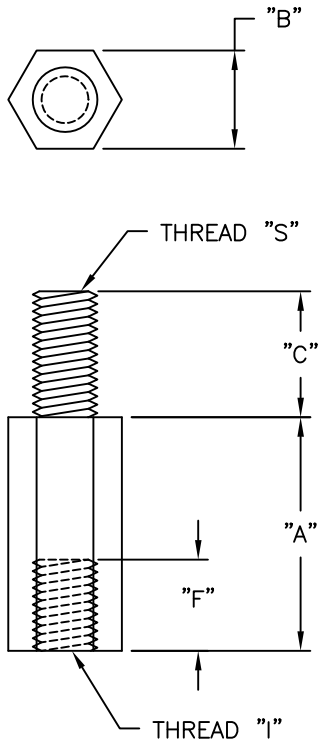


PART NO.	DIM. "A"	DIM. "B"	DIM. "C"	THREAD "S"/"I"	DIM. "F"
NTS–7	.28 (7.0)	.24 (6.0)	.25 (6.3)	M3/M3	.24 (6.0)
NTS–8	.31 (8.0)				
NTS–9	.35 (9.0)		.24 (6.0)		.31 (8.0)
NTS–10	.39 (10.0)				
NTS–11	.43 (11.0)		.24 (6.1)		.39 (10.0)
NTS–12	.50 (12.7)		.25 (6.4)		
NTS–16	.63 (16.0)		.24 (6.1)		
NTS–17.5	.69 (17.5)		.24 (6.0)		
NTS–20	.79 (20.0)		.24 (6.1)		
NTS–25	.98 (25.0)		.26 (6.5)		
NTS–15A	.59 (15.0)		.24 (6.0)	M4/M4	.31 (8.0)
NTS–19	.75 (19.1)	.31 (8.0)	.22 (5.5)		
NTS–37	1.46 (37.1)				

NOTES:
1. MATERIAL: NYLON 6/6 (RMS–74).
   FLAME RETARDANT NYLON (RMS–146),
   AVAILABLE BY SPECIAL ORDER.
   TO ORDER ADD "–146" AS SUFFIX.
2. COLOR: NATURAL.

REV	DESCRIPTION	ENGR DATE
D	SEE CO 200041 FOR CHANGES	SK 09.28.07
C	SEE ECN #522 FOR CHANGES	SM 11.14.02
B	CHANGED FILE NO.	SM 06.07.02
A	REMOVED RMS–01	SM 02.09.01

TITLE: NYLON THREADED SPACERS

DWG IN IN (MM)

TOLERANCES UNLESS NOTED
.XX=±.010
.XXX=±.005
FRAC=±1/64
ANG=±1°

FILE # NTS
MAT'L: SEE NOTES
RE: RICHCO, INC.

DWN: P.B. APP:
DT: 07–24–95 DT:

RICHCO INC.
PO BOX 804238,CHICAGO,60680
(773) 539–4060

FINAL

PART # SEE TABLE

PRINT TYPE CA