


HEYClip™ Locking Releasable Wire Clips

Arrowhead Mount


- Push mount design allows for fast installation.
- Releasable and reusable wire clip.
- Bayonet design allows from .02″ (0,5 mm) panel thickness to .15″ (3,8 mm).
- Bayonet snap locks into a .250″ (6,3 mm) hole and will hold a 25 pound continuous load or a 50 pound impact load.
- Multiple sizes available for bundles from .19″ (4,7 mm) to 1.00″ (25,4 mm).

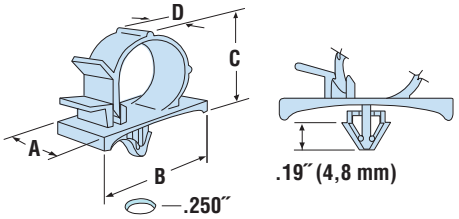


MAXIMUM BUNDLE DIAMETER		PART NO.		DESCRIPTION	FOOTPRINT A x B		OVERALL HEIGHT C		CLAMP WIDTH D		MOUNTING HOLE DIA.	
in.	mm.	Gray	Black		in.	mm.	in.	mm.	in.	mm.	in.	mm.
PMWC Series				For Panels .02″ (0,5 mm) to .08″ (2,0 mm) thick								
.19	4,7	**3845**	**3870**	PMWC 187-20	.54 x 1.01	13,7 x 25,7	.39	9,9	.38	9,7	.250	6,4
.25	6,4	**3846**	**3871**	PMWC 250-20	.58 x 1.01	14,7 x 25,7	.45	11,4	.41	10,4		
.38	9,5	**3847**	**3872**	PMWC 375-20	.65 x 1.01	16,5 x 25,7	.53	13,5	.50	12,7		
.50	12,7	**3848**	**3906**	PMWC 500-20	.75 x 1.20	19,1 x 30,5	.73	18,5	.59	15,0		
.75	19,1	**3849**	**3908**	PMWC 750-20	.88 x 1.38	22,4 x 35,1	.99	25,1	.67	17,0		
1.00	25,4	**3853**	**3909**	PMWC 1000-20	1.37 x 1.88	34,8 x 47,8	1.35	34,3	.99	25,1		
				For Panels .09″ (2,3 mm) to .15″ (3,8 mm) thick								
.19	4,7	**3880**	**3910**	PMWC 187-90	.54 x 1.01	13,7 x 25,7	.39	9,9	.38	9,7	.250	6,4
.25	6,4	**3881**	**3912**	PMWC 250-90	.58 x 1.01	14,7 x 25,7	.45	11,4	.41	10,4		
.38	9,5	**3882**	**3913**	PMWC 375-90	.65 x 1.01	16,5 x 25,7	.55	14,0	.50	12,7		
.50	12,7	**3883**	**3914**	PMWC 500-90	.75 x 1.20	19,1 x 30,5	.73	18,5	.59	15,0		
.75	19,1	**3884**	**3915**	PMWC 750-90	.88 x 1.38	22,4 x 35,1	.99	25,1	.67	17,0		
1.00	25,4	**3885**	**3916**	PMWC 1000-90	1.37 x 1.88	34,8 x 47,8	1.35	34,3	.99	25,1		

Standard color gray or black.

Quick lock/release tab allows fast lock-up and easy access to wire bundle.



Unique design of barbed push mount permits fast installation, ensures reliable retention, and provides high pull-out resistance.




HEYClip™ Locking Releasable Wire Clips


Adhesive-Back Mount


- Releasable and reusable clips for easy wire bundle routing.
- Quick and easy installation - simply peel off backing and press into place.
- Seven sizes for bundles from .187" (4,7mm) to 1.500" (38,1mm) in diameter
- Clips without suffix have a load rating of 1 pound per square inch
- Clips with suffix "A" have a load rating of 6 pounds per square inch
- Clips with suffix "V" have a load rating of 105 pounds per square inch

MAXIMUM BUNDLE DIAMETER		PART NO. Rubber		Acrylic		VHB		DESCRIPTION	FOOTPRINT A x B		OVERALL HEIGHT C		CLAMP WIDTH D	
in.	mm.	Black	Gray	Black	Gray	Black	Gray		in.	mm.	in.	mm.	in.	mm.
.19	4,8	**3917**	**3857**	**3917A**	**3857A**	**3917V***	**3857V***	WCA 187-500	.74 x .62	18,8 x 15,7	.34	8,6	.39	9,9
.25	6,4	**3918**	**3858**	**3918A**	**3858A**	**3918V***	**3858V***	WCA 250-750	1.00 x .87	25,4 x 22,1	.42	10,7	.63	16,0
.38	9,6	**3919**	**3859**	**3919A**	**3859A**	**3919V***	**3859V***	WCA 375-1000	1.00 x 1.00	25,4 x 25,4	.50	12,7		
.50	12,7	**3920**	**3860**	**3920A**	**3860A**	**3920V***	**3860V***	WCA 500-1250	1.00 x 1.21	25,4 x 30,7	.68	17,3	.64	16,3
.75	19,1	**3921**	**3861**	**3921A**	**3861A**	**3921V***	**3861V***	WCA 750-1750	1.15 x 1.45	29,2 x 36,8	.99	25,1		
1.00	25,4	**3923**	**3867**	**3923A**	**3867A**	**3923V***	**3867V***	WCA 1000-4000	1.98 x 2.24	50,3 x 56,9	1.37	34,8	1.26	32,0
1.50	38,1	**3930**	**3868**	**3930A**	**3868A**	**3930V***	**3868V***	WCA 1500-6000	2.42 x 2.95	61,5 x 74,9	1.77	45,0	1.31	33,3

Standard color gray or black.
*Tensile strength for VHB series is greater than wire retention of the clip.







	PMWC	WCA	Adhesive Temperature Ranges***
Material	Nylon 6/6	HS Nylon 6/6 (Black), Nylon 6/6 (Gray)	Rubber Adhesive 50°F (10°C) to 155°F (68°C)
Flammability Rating	94V-2	94V-2	Acrylic Adhesive 10°F (-12°C) to 180°F (82°C)
Temperature Range	32°F (0°C) to 185°F (85°C) - Gray 32°F (0°C) to 221°F (105°C) - Black	-4°F (-20°C) to 239°F (115°C) - Black 40°F (-40°C) to 185°F (85°C) - Gray	VHB Adhesive -40°F (-40°C) to 194°F (90°C)

***Low temperature reflects minimum application temperature for adhesives

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com