
Heyco® Nytye® Nylon Cable Tie Variations

PART SPECIFICATIONS Tensile Strength Lbs.	N	Max. Bundle Diameter in.	mm.	PART NO. Natural	UV Black	DESCRIPTION	PART DIMENSIONS A Length in.	mm.	B Width in.	mm.
Low Profile							ALL NEW PRODUCT			
18	80	.98	25,0	**14110**	**14110B**	LPNT-18-043	4.33	110		
		1.57	40,0	**14111**	**14111B**	LPNT-18-061	6.10	155	.10	2,5
		2.00	51,0	**14112**	**14112B**	LPNT-18-080	8.07	205		
40	178	1.29	33,0	**14113**	**14113B**	LPNT-40-059	5.90	150		
		2.00	51,0	**14114**	**14114B**	LPNT-40-080	8.07	205		
		3.03	77,0	**14115**	**14115B**	LPNT-40-110	11.02	280	.14	3,6
		4.05	103,0	**14116**	**14116B**	LPNT-40-145	14.56	370		
50	222	2.04	52,0	**14117**	**14117B**	LPNT-50-080	8.04	205		
		2.67	68,0	**14118**	**14118B**	LPNT-50-100	10.04	255		
		2.99	76,0	**14119**	**14119B**	LPNT-50-110	11.02	280	.18	4,6
		4.05	103,0	**14120**	**14120B**	LPNT-50-145	14.56	370		
120	534	3.03	77,0	**14121**	**14121B**	LPNT-120-110	11.02	280	.30	7,6
		4.05	103,0	**14122**	**14122B**	LPNT-120-145	14.56	370		
Releasable							ALL NEW PRODUCT			
40	178	1.46	37,0	**13297**	**13297B**	RNT-40-059	5.94	151	.14	3,5
50	222	1.97	50,0	**13301**	**13301B**	RNT-50-079	7.95	202	.18	4,5
		3.15	80,0	**14000**	**14000B**	RNT-50-110	11.02	280	.19	4,8
		1.18	30,0	**14005**	**14005B**	RNT-50-049	4.92	125	.28	7,2
		1.38	35,0	**14010**	**14010B**	RNT-50-059	5.90	150		
		2.24	57,0	**14011**	**14011B**	RNT-50-079-003	7.87	200		
		2.87	73,0	**14012**	**14012B**	RNT-50-098	9.84	250	.30	7,6
		3.50	89,0	**14013**	**14013B**	RNT-50-118	11.81	300		
		3.54	90,0	**14014**	**14014B**	RNT-50-137	13.78	350		


Screw Mount											Screw Size
18	80	.87	22,0	**13307**	**13307B**	MNT-18-044	4.41	112	.10	2,5	#4 screw
(Heat Stabilized/UV Black)				**23307B**							
40	178	1.38	35,0	**13308**	**13308B**	MNT-40-067	6.69	170	.14	3,6	#8 screw
(Heat Stabilized/UV Black)				**23308B**							
50	222	1.75	44,4	**3560**	**3560B**	MNT-150	8.00	203	.19	4,8	#10 screw
		1.97	50,0	**13309**	**13309B**	MNT-50-086	8.66	220	.17	4,3	
(Heat Stabilized/UV Black)				**23309B**							

Identification											Marking Area W x L in.	mm.	in.	mm.	Style
18	80	.87	22,0	**13316**	-	NTID-18-039	3.94	100	.10	2,5	.31	8,0	1.00	25,4	1
				13317	-	NTID-18-053	5.28	134,1	.10	2,5	.80	20,2	1.09	27,8	2

Standard color natural and UV Black. Consult Heyco for other colors.

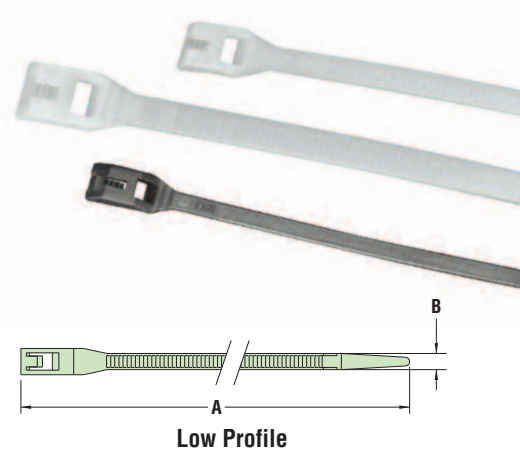


Low Profile

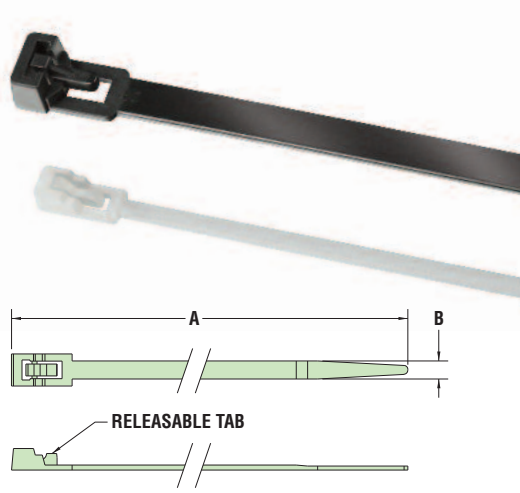


Releasable




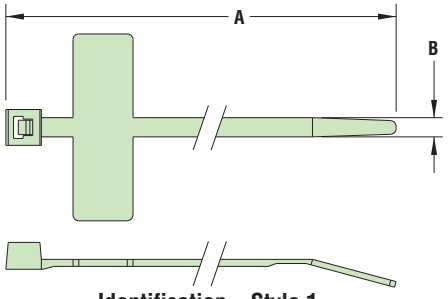

Identification – Style 1

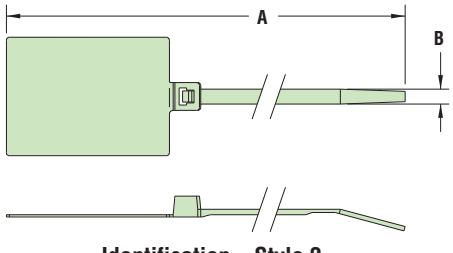

Identification – Style 2

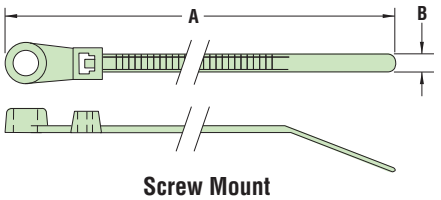

Screw Mount

Quick Specs

Material	Nylon 6/6, Nylon 6/6 UV Black, or Nylon 6/6 Heat Stabilized/UV Black
Flammability Rating	94V-2
Temperature Range	Nylon 6/6 and Nylon 6/6 UV Black: -40°F (-40°C) to 185°F (85°C) Nylon 6/6 Heat Stabilized/UV Black: -40°F (-40°C) to 221°F (105°C)