

Slotted Optical Switch

Type OPB817



Features

- .20" (5.08 mm) wide gap
- 24" minimum, 26 AWG wire leads
- Dust protection
- .86" (21.8 mm) deep slot


Description

The OPB817 consists of an infrared emitting diode and an NPN silicon phototransistor mounted in an opaque housing with clear windows for dust protection. The extended deep slot allows for a longer reach of the optical center line from the mounting plane, .90" (22.86 mm).

Internal apertures are .010" x 0.06" for the phototransistor "S side" and .050" x .06" for the LED "E side".

Custom electrical, wire or cabling is available. Contact your local representative or Optek for more information.

Visit our website at www.optekinc.com
 or email us at sensors@optekinc.com

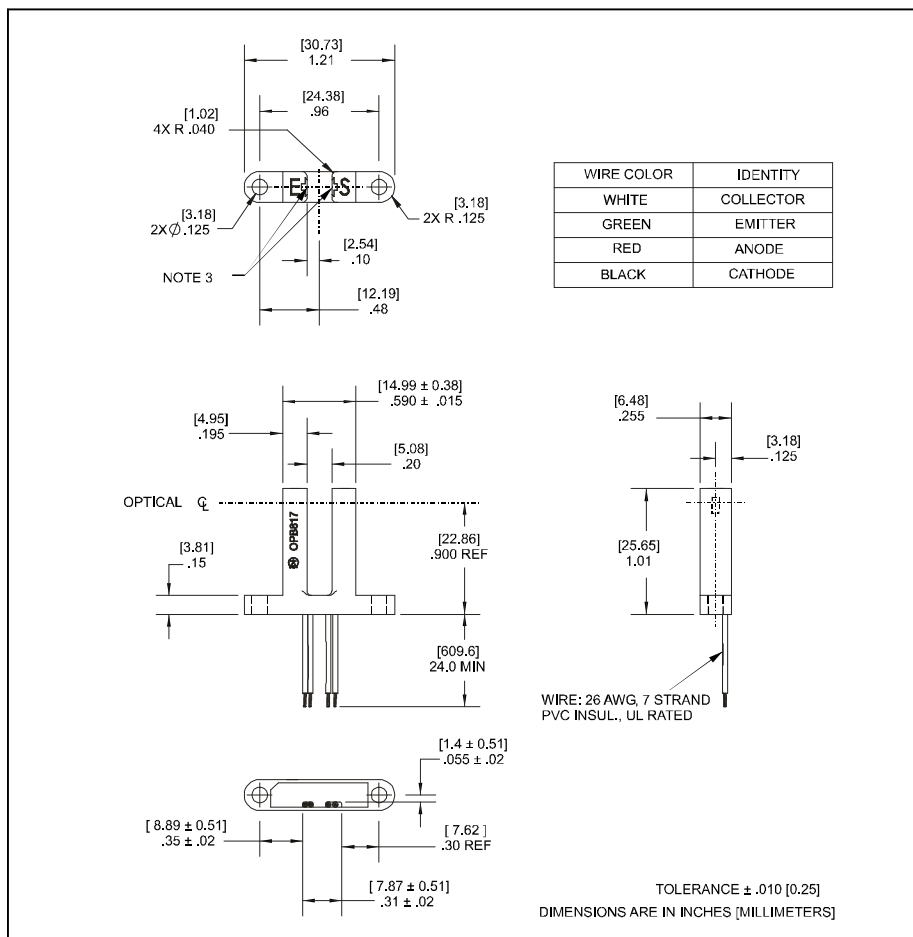

Absolute Maximum Ratings ($T_A = 25^\circ \text{C}$ unless otherwise noted)

Storage and Operating Temperature Range -40°C to $+80^\circ \text{C}$

Input Diode

Forward DC Current 50 mA

Peak Forward Current (1 μs pulse width, 300 pps) 3.0 A

Reverse DC Voltage 2.0 V

Power Dissipation 100 mW⁽¹⁾

Output Phototransistor

Collector-Emitter Voltage 30 V

Emitter-Collector Voltage 5.0 V

Collector DC Current 30 mA

Power Dissipation 100 mW⁽¹⁾

NOTES:

- (1) Derate linearly 1.67 mW/ $^\circ \text{C}$ above 25°C .
- (2) All parameters tested using pulse technique.
- (3) Clear dust protection.

PRECAUTIONS: Exposure of the plastic body to chlorinated hydrocarbons and ketones such as thread lock and instant adhesive products will degrade the plastic body. Cleaning agents methanol and isopropanol are recommended. Spray or wipe do not submerge.

Type OPB817

Electrical Characteristics ($T_A = 25^\circ \text{C}$ unless otherwise noted)

SYMBOL	PARAMETER	MIN	MAX	UNITS	TEST CONDITIONS
Input Diode					
V_F	Forward Voltage		1.8	V	$I_F = 20 \text{ mA}$
I_R	Reverse Current		100	μA	$V_R = 2 \text{ V}$
Phototransistor					
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	30		V	$I_C = 1 \text{ mA}, I_F = 0, E_e = 0$
$V_{(BR)ECO}$	Emitter-Collector Breakdown Voltage	5.0		V	$I_E = 100 \mu\text{A}, I_F = 0, E_e = 0$
I_{CEO}	Collector-Emitter Leakage Current		100	nA	$V_{CE} = 10 \text{ V}, I_F = 0, E_e = 0$
Coupled					
$I_{C(ON)}$	On-State Collector Current	1.0	10	mA	$V_{CE} = 5.0, I_F = 20 \text{ mA}$
$V_{CE(SAT)}$	Collector-Emitter Saturation Voltage		0.40	V	$I_C = 100 \mu\text{A}, I_F = 20 \text{ mA}$

SLOTTED
OPTICAL
SWITCHES

Optek reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Optek Technology, Inc. 1215 W. Crosby Road Carrollton, Texas 75006 (972)323-2200 Fax (972)323-2396