




Transfer or duplication of this doucument as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

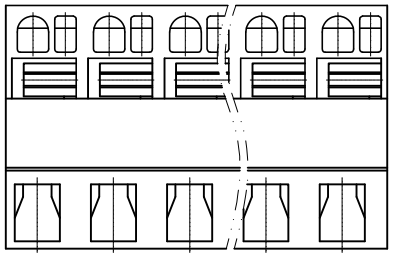



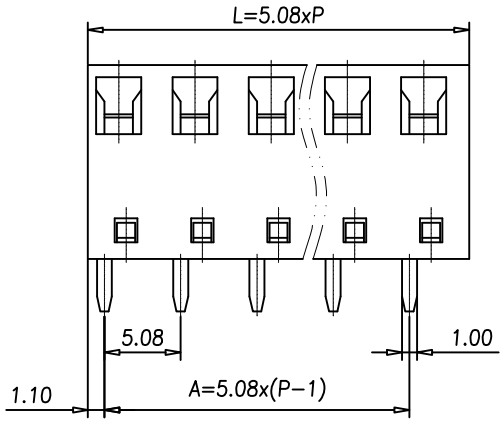

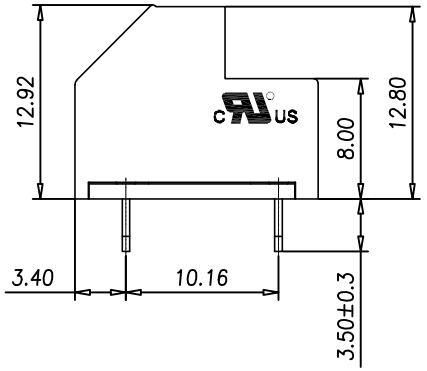

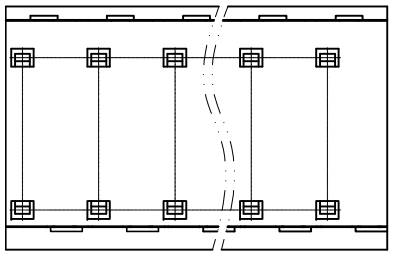

Technical data

1.Nominal voltage: 300V/15A
PITCH:5.08mm
2.Connection Capacity: 24-14AWG
3. Wire Strip length: 9-10mm
4.Insulation Withstanding Voltage:
AC 2000V/MIN
5.Insulation Resistance:
500MΩor more at DC500V
6.Operating temperature range:-40°C~115°C
7.Soldering temperature range:250°C/5sec
8.Safety approval:
9.RoHS Compliance

Part No.:

OSTHDXX0080

No. of Poles	
02	2 Poles
03	3 Poles
...	...
24	24 Poles

COLOR	
0:	Black
2:	Red
3:	Orange
4:	Yellow
5:	Green
6:	Blue
8:	Grey (Standard)

Nonstandard colors
Mins could apply

ITEM	NAME OF PART	MATERIAL	NOTES	Q"TY
	Wire Guard	Stainless Steel		
	Pin	Brass	Tin Plated	P
	Housing	Thermoplastic UL94-V0		1

DWG.	W.F. Zhang	DATE	2017.03.03	UNITS:	MM	SHEET: 1 OF 1	Tolerance
CHK.		DATE		SCALE:	NONE 3:1 (:)	REV.: A	X. ±0.50
APP.		DATE		TITLE:	OSTHD Series 5.08mm		X.X ±0.30
							X.XX ±0.10
				PART NO.	OSTHDXX0080		X° ±1°
				DWG NO.	OSTHDXX0080.dwg		

ON-SHORE TECHNOLOGY, INC.

REV	SIGN	DESCRIPTION	CHK.	DATE
	1			