



Transfer or duplication of this doucument as well as the utilisation or communication of its content are not permitted unless express consen is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

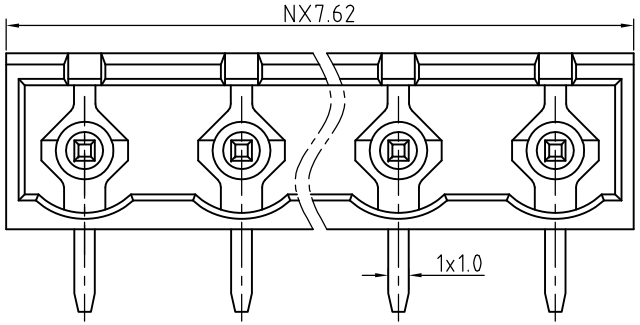

N=Number of contacts

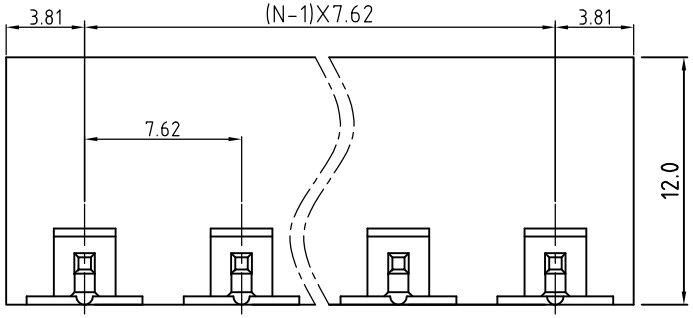

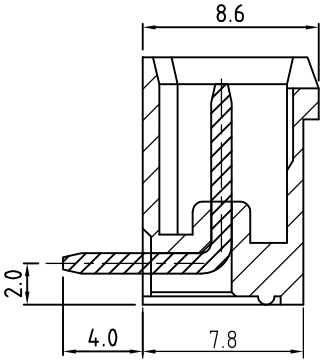

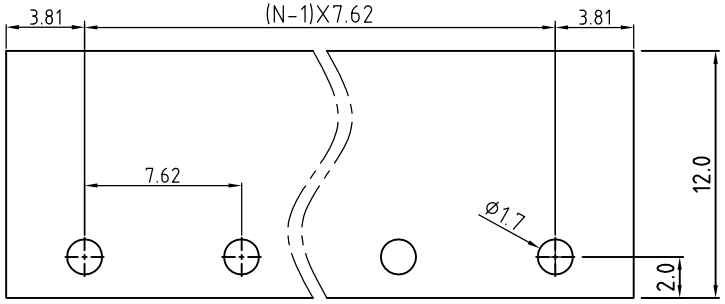

PCB. LAYOUT

Technical Data:
Electrical
- Pitch: 7.62mm
- Voltage rating: 300V
- Current rating: 16 Amps
- Withstanding Voltage: 2500VAC(1min)

Mechanical:
- Operating temperature: -40°C to +105°C
- Soldering temperature:
- Temperature= 250°C±10°C /5 seconds max

Safety approval:
RoHS Compliance

Part No.:

OSTOQXX0151

No. of Poles	COLOR
02 2 Poles	0: Black
03 3 Poles	2: Red
... ...	3: Orange
24 24 Poles	4: Yellow
	5: Green (Standard)
	6: Blue
	8: Grey

Nonstandard colors
Mins could apply

ITEM	NAME OF PART	MATERIAL	NOTES	Q"TY
2	Pin	Copper Alloy	Tin plated	1×N
1	Body	PA66-30%GF UL94V		1

REV	SIGN	DESCRIPTION	CHK.	DATE
	⚠			

DWG.		DATE		UNITS:	MM	SHEET: 1 OF 1	Tolerance
CHK.		DATE		SCALE:	NONE 4:1 (:)	REV.: A	X. ±0.50
APP.		DATE		TITLE:	OSTOQ SERIES 7.62MM CLOSED RIGHT ANGLE		X.X ±0.30
							X.XX ±0.10
				PART NO.	OSTOQXX0151		X° ±1°
ON-SHORE TECHNOLOGY, INC.				DWG NO.	OSTOQXX0151.DWG		