



Transfer or duplication of this doucument as well as the utilisation or communication of its content are not permitted unless express consen is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

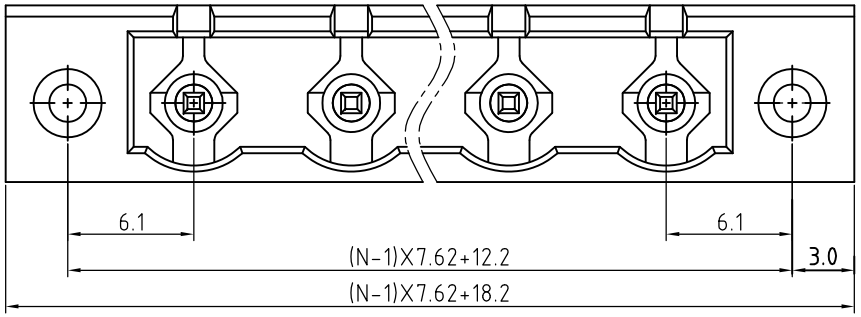

N=Number of contacts

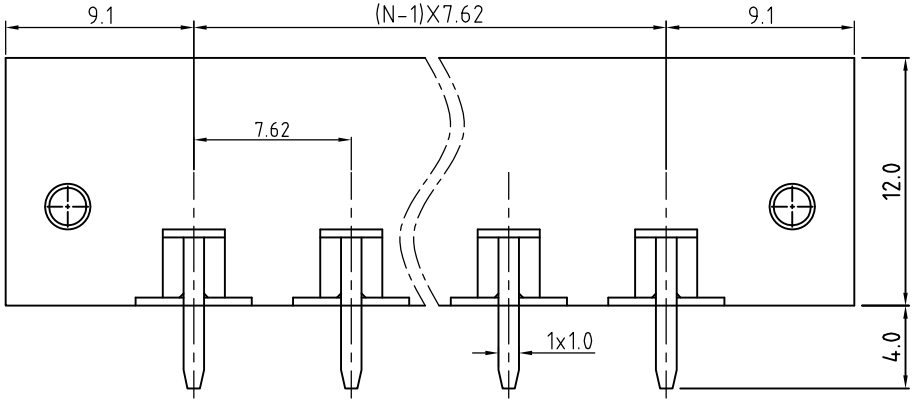

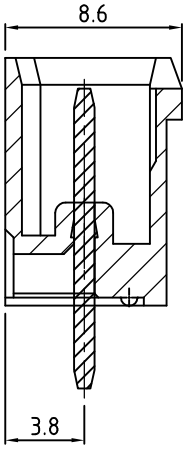

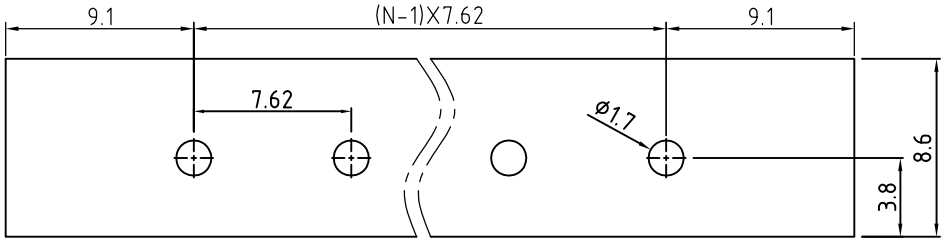

Technical Data:

Electrical

- Pitch: 7.62mm
- Voltage rating: 300V
- Current rating: 16 Amps
- Withstanding Voltage: 2500VAC(1min)

Mechanical:

- Operating temperature: -40°C to +105°C
- Soldering temperature:
- Temperature= 250°C±10°C /5 seconds max
- Safety approval:
- RoHS Compliance

Part No.:

OSTOQXX0550

No. of Poles		COLOR
02	2 Poles	0: Black
03	3 Poles	2: Red
...	...	3: Orange
24	24 Poles	4: Yellow
		5: Green (Standard)
		6: Blue
		8: Grey

Nonstandard colors
Mins could apply

ITEM	NAME OF PART	MATERIAL	NOTES	Q"TY
3	Flange nut	Copper Alloy		2
2	Pin	Copper Alloy	Tin plated	1×N
1	Body	PA66-30%GF UL94V		1

DWG.		DATE	UNITS:	MM	SHEET: 1 OF 1	Tolerance
CHK.		DATE	SCALE:	NONE 4:1 (:)	REV.: A	X. ±0.50
APP.		DATE	TITLE:	OSTOQ SERIES 7.62MM WITH FLANGE VERTICAL		X.X ±0.30
						X.XX ±0.10
			PART NO.	OSTOQXX0550		X° ±1°
			DWG NO.	OSTOQXX0550.DWG		

ON-SHORE TECHNOLOGY, INC.

REV	SIGN	DESCRIPTION	CHK.	DATE
	⚠			