

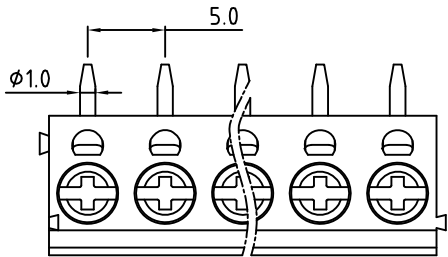


N=Number of contacts



P.C.B. LAYOUT

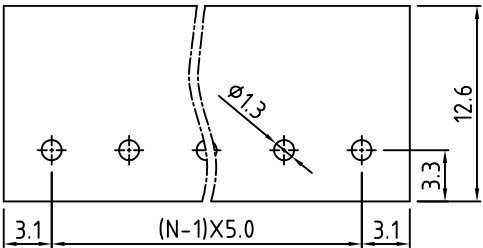

Technical Data:

Electrical

Pitch: 5.0mm

Voltage rating: 250V

Current rating: 15 Amps

Contact resistance: 20mΩ(max)

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Wire range: 14-24AWG

Wire strip length: 6-7mm

Mechanical:

Torque: 4.0kgf.cm/M2.5

Operating temperature: -40°C to +105°C

Soldering temperature:

Temperature= 250°C±10°C /5 seconds max

Safety approval: 

RoHS Compliance

Part No.:

OSTTBXX0161

No. of Poles

02 2 Poles

03 3 Poles

... ..

24 24 Poles

Nonstandard colors
Mins could apply

COLOR

0: Black

2: Red

3: Orange

4: Yellow

5: Green

6: Blue (Standard)

8: Grey

4	Screw	Steel / M2.5	Cr3+ plated	1xN
3	Wire guard	Stainless steel		1xN
2	Terminal	Copper Alloy	Tin plated	1xN
1	Body	PA66 UL94V-0		1
ITEM	NAME OF PART	MATERIAL	NOTES	Q"TY
DWG.	DATE	UNITS:	MM	SHEET: 1 OF 1
CHK.	DATE	SCALE:	NONE 3:1 (:)	REV.: A
APP.	DATE	TITLE:	OSTTB SERIES 5.0MM	X. ±0.50
			2- INTERLOCKS	X.X ±0.30
			PART NO. OSTTBXX0161	X° ±1°
			DWG NO. OSTTBXX0161.DWG	

REV	SIGN	DESCRIPTION	CHK.	DATE
-----	------	-------------	------	------



ON-SHORE TECHNOLOGY, INC.