




Transfer or duplication of this doucument as well as the utilisation or communication of its content are not permitted unless express consen is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

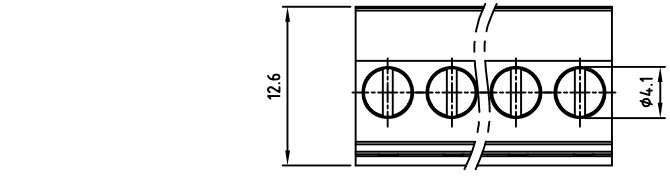




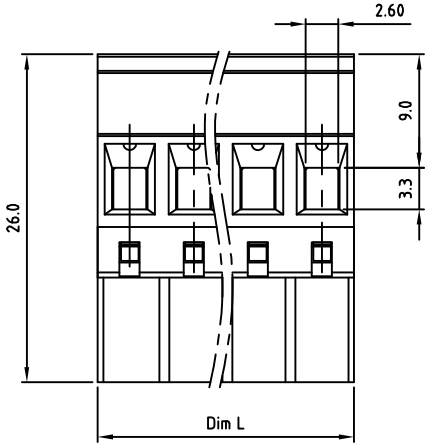


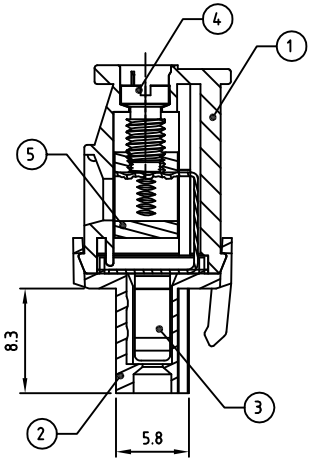





2p

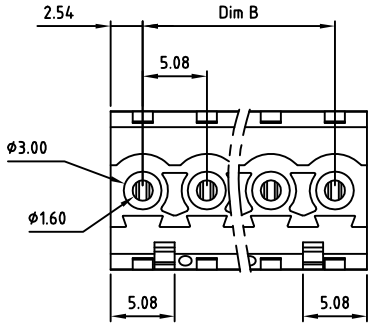

Technical data

1.Nominal voltage: 300V/15A
PITCH:5.08mm

2.Connection capacity:
AWG 30-12

3.Insulation Withstanding Voltage:
AC 1600V/MIN

4.Insulation Resistance:
1000MΩor more at DC500V

5.Tightening torque:
5kgf.cm (0.5N.m / 4.3 Lb-in)

6.Screw thread: M3

7.Stripping length: 6-7mm

8.Operating temperature range:-40°C ~ 115°C

9.Undimensioned Tolerances:

Dim.L=Px5.08
Dim.B=(P-1)x5.08
P= number of poles

	Dim B	Dim L
0-30mm	±0.15	±0.20
over 30mm-60mm	±0.20	±0.25
over 60mm-90mm	±0.25	±0.30
over 90mm	±0.30	±0.40

10.Safety approval:

11.RoHS Compliance

Part No.: OSTTSXX515B

No. of Poles	
02	2 Poles
03	3 Poles
...	...
24	24 Poles

COLOR	
0:	Black
2:	Red
3:	Orange
4:	Yellow
5:	Green (Standard)
6:	Blue
8:	Grey

Nonstandard colors
Mins could apply

ITEM	NAME OF PART	MATERIAL	NOTES	Q"TY
5	CAGE	BRASS	M3.0×0.5, Ni PLATED	P
4	SCREW	STEEL	M3.0×0.5, Zn Plated	P
3	WIRE GUARD	BRONZE (PhBz)	TIN PLATED	P
2	DOWN BODY	PA66 UL94V-0		1
1	UP BODY	PA66 UL94V-0		1

DWG.	WF. Zhang	DATE	2016.06.15	UNITS:	MM	SHEET: 1 OF 1	Tolerance
CHK.	WF. Zhang	DATE	2016.06.15	SCALE:	NONE 2.5:1 (:)	REV.: A	X. ±0.50
APP.		DATE		TITLE:	OSTTS 5.08 Series W/o Flange "-" Slot screw type		X.X ±0.30
							X.XX ±0.10
							X° ±1°
				PART NO.	OSTTSXX515B		
				DWG NO.	OSTTSXX515B.dwg		

SIGN	DESCRIPTION	CHK.	DATE
⚠			

ON-SHORE TECHNOLOGY, INC.