


Transfer or duplication of this doucument as well as the utilisation or communication of its content are not permitted unless express consen is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

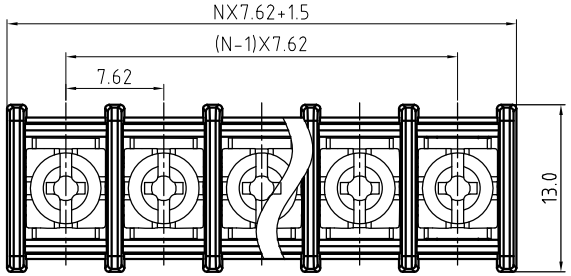


N=Number of contacts

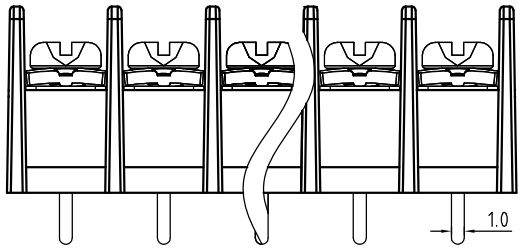



P.C.B LAYOUT

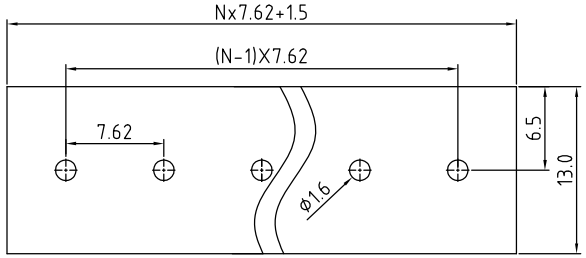

Technical Data:

Electrical

- Pitch: 7.62mm
- Voltage rating: 250 V
- Current rating: 15 Amps
- Contact resistance: 20mΩ(max)
- Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs
- Wire range: 16-22 AWG

Mechanical:

- Torque: 6.0kgf.cm/M3.0
- Operating temperature: -40°C to +105°C
- Soldering temperature
- Temperature= 250°C±10°C /5 seconds max
- Safety approval:
- RoHS Compliance

Part No.: OSTYK313XX030

No. of Poles

02 2 Poles
03 3 Poles
... ...
24 24 Poles

ITEM	NAME OF PART	MATERIAL	NOTES	Q"TY
3	Screw	Steel / M3.0	Ni plated	1×N
2	Terminal	Copper Alloy	Tin plated	1×N
1	Body	PA66+30%GF/PBT+30%GF		1

DWG.		DATE		UNITS:	MM	SHEET: 1 OF 1	Tolerance
CHK.		DATE		SCALE:	NONE 2.5:1 (:)	REV.: A	X. ±0.50
APP.		DATE		TITLE:	OSTYK-313 SERIES 7.62MM WITHOUT FLANGE		X.X ±0.30
							X.XX ±0.10
				PART NO.	OSTYK313XX030		X° ±1°
			ON-SHORE TECHNOLOGY, INC.	DWG NO.	OSTYK313XX030.DWG		

REV	SIGN	DESCRIPTION	CHK.	DATE
	⚠			