


Heyco® Original Strain Relief Bushings


Pigtail with Integral Nylon Spring, for Flat and Round Cables

WILL FIT THESE CABLES				PANEL DIMENSIONS						PART	DESC	PART DIMENSIONS				Mounting
UL Type	AWG/ Conductors	Approximate Size		A Mounting Hole Dia.		B To Prevent Rotation		Finished Fit Panel Thickness*		NO. Black		C HEAD LENGTH		D BODY LENGTH		Hole Plug
		in.	mm.	in.	mm.	in.	mm.	in.	mm.			in.	mm.	in.	mm.	PART NO.
For Flat Cables																
SPT-1	18/3	.12x.30	3,0x7,6	.500	12,7	.465	11,8	.062	1,6	**1541**	SR 4N-7	1.718	43,6	1.984	50,4	2491
SPT-2 & HPN	18/2	.15x.28	3,8x7,1													
For Round Cables																
SV & SVT	18/2	.250	6,4	.500	12,7	.450	11,4	.062	1,6	**1590**	SR 5N-7	1.703	43,3	1.984	50,4	2491
	18/3	.255	6,5	.500-.515	12,7-13,1											
HPD	18/2	.270	6,9	.500	12,7											
	16/2	.290	7,4	.500-.515	12,7-13,1											
Same as SR 5N-7 above except →								.125	3,2	**1593**	SR 5P-7	1.703	43,3	1.984	50,4	2491
SJ, SJO & SJT	18/2	.300	7,6	.625	15,9	.550	14,0	.062	1,6	**1596**	SR 6N-7	1.718	43,6	2.109	53,6	2497
Same as SR 6N-7 above except →								.125	3,2	**1602**	SR 6P-7	1.718	43,6	2.109	53,6	2497
SJ, SJO & SJT	16/2	.315	8,0	.625	15,9	.550	14,0	.062	1,6	**1599**	SR 6N3-7	1.718	43,6	2.109	53,6	2497
	18/3	.320	8,1													
	14/2	.350	8,9													
	16/3	.355	9,0													
	18/4	.360	9,1													
Same as SR 6N3-7 above except →								.125	3,2	**1605**	SR 6P3-7	1.718	43,6	2.109	53,6	2497
										1604	SR 6P3-7S**					
SJT	18/4	.360	9,1	.750	19,0	.660	16,8	.125	3,2	**1611**	SR 7P-7	2.156	54,9	2.598	66,0	2503
SJT & SJTO	14/3	.370	9,4													
S & ST	18/2	.390	9,9													
	18/3	.405	10,3													
	16/2	.405	10,3													
	16/3	.430	10,9	.750-.781	19,0-19,8											

Standard color black. Consult Heyco for white and other colors.
*Maximum Panel Thickness. Part has additional clearance. Consult Heyco for your Custom Finished Fit Panel Thickness.
**For use in split housings only: Larger locking step on body and key, for additional pull out resistance.



MOUNTING HOLE

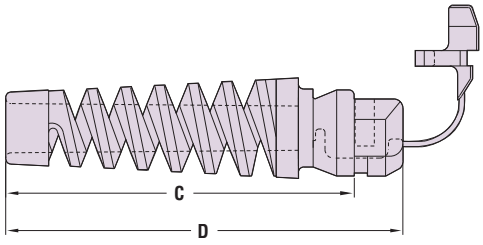

- **Integral nylon spring eases the cable into a lazy bend**; prevents sharp bending and assures longest cable and product life.
- Adds reliability, longevity, and safety. Will pass CSA's 50,000 cycle vacuum cleaner test (C22.2 No. 67).
- Protects the lifeline of your electric/ electronic products by absorbing the forces of pull, push, twist, and flex.
- Securely anchors, insulates, and protects cables at panel entry points.
- Not recommended for applications where the power supply cord is subject to whipping or jump rope type motion.
- See page 4-38 for corresponding **Mounting Hole Plugs** which can be used to fill blank/unused Mounting Holes and thus allow for a single panel design for multiple applications.
- Consult Heyco for other wire types and sizes.
- See pages 4-27 & 4-28 for SR assembly tools.
- For Double D Mounting Hole Punches, see page 4-30.

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E15331
	Certified by the Canadian Standards Association File 8919
Flammability Rating	94V-2
Temperature Range	-.04°F (-18°C) to 221°F (105°C)

Quick Specs