Panasonic

2018

CATALOG

Inductors



2018.10 | industrial.panasonic.com/

Panasonic

Inductors CONTENTS


Classification	Product Item	Type · Series	Part Number	Page
Power Inductors (SMD)	Power Choke Coils	PCC- M0530M/M0540M M0630M/M0645M M0754M/M0750M/M0854M M0850M/M1054M/M1050M M1050ML/M1060ML (MC) (Automotive Grade)	ETQ P3M□□□Y□□ ETQ P4M□□□Y□□ ETQ P5M□□□Y□□ ETQ P6M□□□Y□□	2
		PCC- M1050MS(MC) (Automotive Grade)	ETQ P5M□□□YSC	16
		PCC- M1280MF (MC) (Automotive Grade)	ETQ P8M□□□JFA	19
		PCC- M0530M-LP/M0630M-LP M0840M-LP/M1040M-LP (MC) (Automotive Grade)	ETQ P3M□□□KV□ ETQ P4M□□□KV□	24
		PCC- M0648M-LE M0748M-LE (MC) (Automotive Grade)	ETQ P4M□□□KFN ETQ P4M□□□KFM	36
		PCC- M0530M-H/M0630M-H (MC) (Automotive Grade)	ETQ P3M□□□HF□	41
		PCC-D1413H (DUST) (Automotive Grade)	ETQ PDH240DTV	45
		Soldering Conditions (PCC for automotive use)		48
		Safety Precautions (PCC for automotive use)		49
		PCC-M0730L (MC) for consumer use	ETQ P3L	51
		PCC-M0740L (MC) Low DCR Type for consumer use	ETQ P4L	53
		PCC-M1040L (MC) for consumer use	ETQ P4L	55
		PCC-M1040L (MC) Low DCR Type for consumer use	ETQ P4L	57
		PCC-M1250L (MC) for consumer use	ETQ P5L	59
		Packaging Methods · Soldering Conditions (PCC for consumer use)		61
		Safety Precautions (PCC for consumer use)		63
	Power Inductors / Wire Wound type	Selection Guide		64
		Magnetic Shielded Type (Magnetic Adhesive Type)	ELL VEG, VFG-C, VGG, VGG-C	65
			ELL 4FG-A, 4GG, 4LG-A	68
			ELL 6GG, 6PG	71
		Magnetic Shielded Type (Ring Core Type)	ELL 6RH, 6SH, 6UH	73
			ELL 8TP	76
			ELL ATP	78
			ELL CTP	80
		Soldering Conditions · Safety Precautions		82
	Voltage Step-up Coils	Chip	ELT 3KN	84
Power Inductors (THD)	Choke Coils Pin terminal	Common page		89
		Regular Type	ELC 09D, 11D, 12D, 16B, 18B	91
		Magnetic Shield Type	ELC 10E-L, 12E-L, 15E-L, 18E-L	96
		Taping/Safety Precautions		100

All products in this catalog comply with the RoHS Directive.

The RoHS Directive is “the Directive (2011/65/EU) on the Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment “ and its revisions.

Power Choke Coil (Automotive Grade)

Series: **PCC-M0530M (MC) PCC-M0540M (MC)**
PCC-M0630M (MC) PCC-M0645M (MC)
PCC-M0754M (MC) PCC-M0750M (MC)
PCC-M0854M (MC) PCC-M0850M (MC)
PCC-M1054M (MC) PCC-M1050M (MC)
PCC-M1050ML (MC) PCC-M1060ML (MC)




High heat resistance and high reliability
Using metal composite core (MC)

Industrial Property : patents 21 (Registered 2/Pending 19)

Features

- High heat resistance : Operation up to 150 °C including self-heating
- High-reliability : High vibration resistance as result of newly developed integral construction; under severe reliability conditions of automotive and other strenuous applications
- High bias current : Excellent inductance stability using ferrous alloy magnetic material (Fig.1)
- Temp. stability : Excellent inductance stability over broad temp. range (Fig.1)
- Low audible (buzz) noise : New metal composite core technology
- High efficiency : Low R_{DC} of winding and low eddy-current loss of the core
- Shielded construction
- AEC-Q200 Automotive qualified
- RoHS compliant

● Fig.1 Inductance v.s. DC current, Temp.
ETQP5M470YFM(reference)



Recommended Applications

- Noise filter for various drive circuitry requiring high temp. operation and peak current handling capability
- Boost-Converter, Buck-Converter DC/DC

Standard Packing Quantity (Minimum Quantity/Packing Unit)

- 1,000 pcs./box (2 reel) : PCC-M0645M, M0754M, M0750M, M0854M, M0850M, M1054M, M1050M, M1050ML, M1060ML
- 2,000 pcs./box (2 reel) : PCC-M0530M, M0540M, M0630M

Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11	12
E	T	Q	P		M				Y	F	
Product Code			Classification	Height	Winding	Inductance			Core	Suffix	Size

Inductance:
4R7→ 4.7 µH
220→ 22 µH
101→ 100 µH

Size:

P	□ 5 mm size
N	□ 6 mm size
M	□ 7 mm size
K	□ 8 mm size
C	□10 mm size

Temperature rating

Operating temperature range		Tc : -40 °C to +150 °C(Including self-temperature rise)
Storage condition	After PWB mounting	
	Before PWB mounting	Ta : -5 °C to +35 °C 85%RH max.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

1. Series PCC-M0530M/PCC-M0540M (ETQP3M□□□YFP/ETQP4M□□□YFP)


Standard Parts

Series	Part No.	Inductance *1		DCR (at 20 °C) (mΩ)		Rated Current (Typ. : A)		
		L0 (μH)	Tolerance (%)	Typ. (max.)	Tolerance (%)	ΔT=40K		ΔL=–30%
						(*2)	(*3)	(*4)
PCC-M0530M [5.5×5.0×3.0(mm)]	ETQP3M2R2YFP	2.2	±20	22.6 (24.8)	±10	4.8	5.8	10.9
	ETQP3M3R3YFP	3.3		31.3 (34.4)		4.1	5.0	8.6
PCC-M0540M [5.5×5.0×4.0(mm)]	ETQP4M4R7YFP	4.7		36.0 (39.6)		4.0	4.8	7.7
	ETQP4M220YFP	22		163 (179)		1.9	2.3	3.1

(*1) Measured at 100 kHz.
(*2) DC current which causes temperature rise of 40 K. Parts are soldered by reflow on four-layer PWB (1.6 mm FR4) and measured at room temperature. See also (*5)
(*3) DC current which causes temperature rise of 40 K. Parts are soldered by reflow on multilayer PWB with high heat dissipation performance. Note: Heat radiation constant are approx. 52 K/W measured on 5.5×5.0×3.0 mm case size and approx. 48 K/W measured on 5.5×5.0×4.0 mm case size. See also (*5)
(*4) Saturation rated current : DC current which causes L(0) drop –30 %.
(*5) Within a suitable application, the part's temperature depends on circuit design and certain heat dissipation conditions. This should be double checked in a worst case operation mode.
In normal case, the max.standard operating temperature of +150 °C should not be exceeded.
For higher operating temperature conditions, please contact Panasonic representative in your area.


Performance Characteristics (Reference)

● Inductance vs DC Current

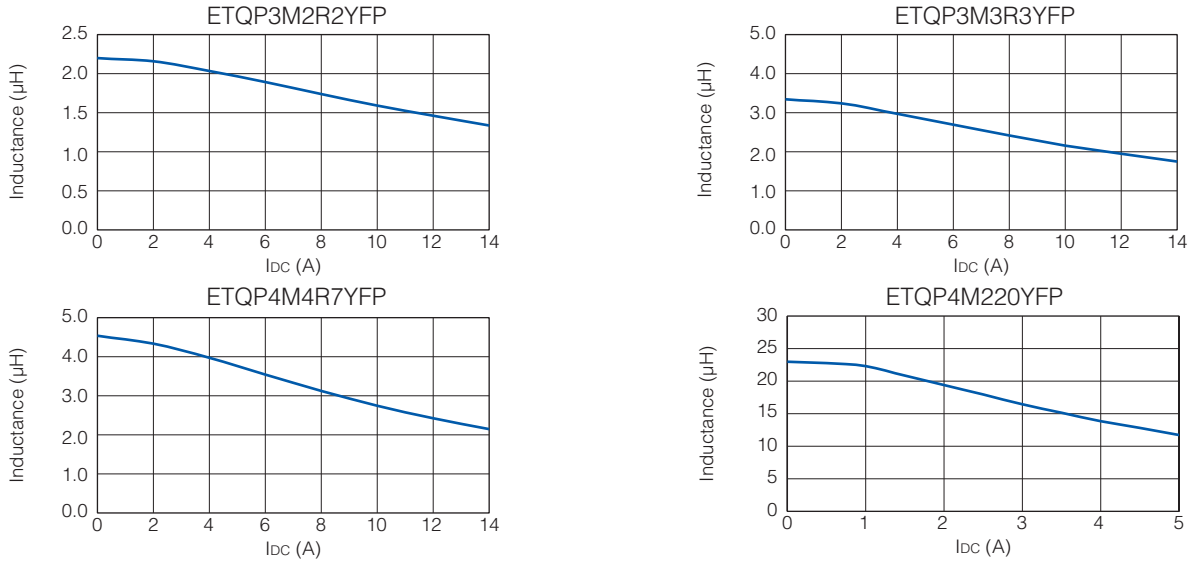

● Case Temperature vs DC Current

PWB condition A : Four-layer PWB (1.6 mm FR4), See also (*2)
PWB condition B : Multilayer PWB with high heat dissipation performance. See also (*3)

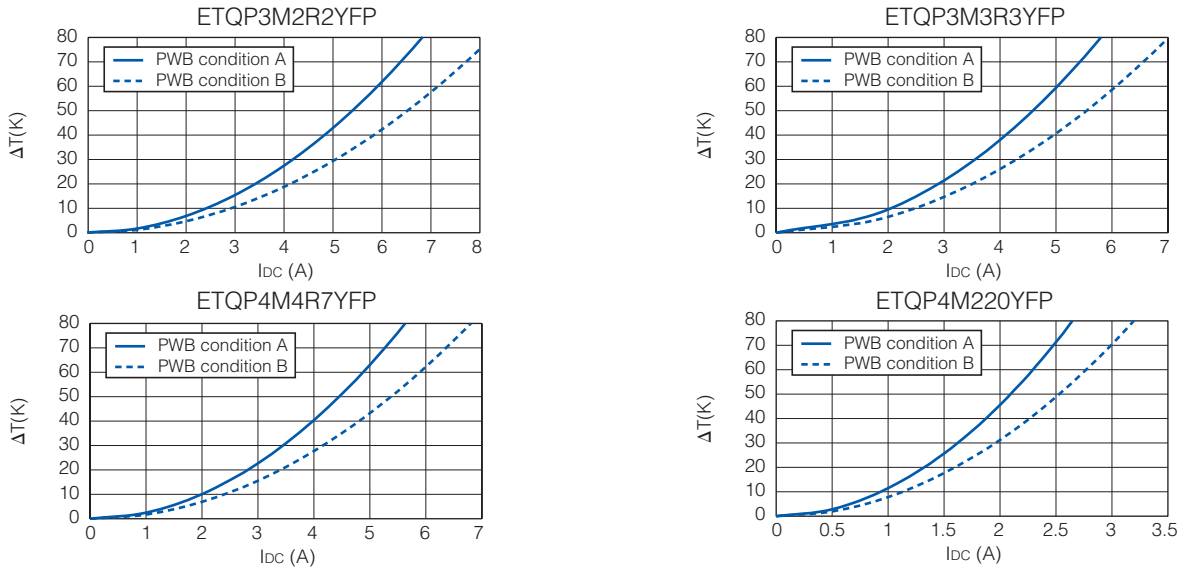

2. Series PCC-M0630M/PCC-M0645M (ETQP3M□□□YFN/ETQP4M□□□YFN)

Standard Parts


Series	Part No.	Inductance *1		DCR (at 20 °C) (mΩ)		Rated Current (Typ. : A)		
		L0 (μH)	Tolerance (%)	Typ. (max.)	Tolerance (%)	ΔT=40K (*2)	ΔT=40K (*3)	ΔL=–30% (*4)
PCC-M0630M [6.5×6.0×3.0(mm)]	ETQP3MR68YFN	0.68	±20	6.3 (6.9)	±10	9.8	12.0	24.0
	ETQP3M1R0YFN	1.0		7.9 (8.7)		8.8	10.7	20.0
PCC-M0645M [6.5×6.0×4.5(mm)]	ETQP4M6R8YFN	6.8		39.3 (43.2)		4.1	5.2	10.0
	ETQP4M100YFN	10		54.2 (59.6)		3.3	4.5	8.3
	ETQP4M220YFN	22		126(138.6)		2.3	2.9	6.0
	ETQP4M330YFN	33		172(189.2)		2.0	2.5	4.1
	ETQP4M470YFN	47		210 (231)		1.8	2.2	3.8

(*1) Measured at 100 kHz.
(*2) DC current which causes temperature rise of 40 K. Parts are soldered by reflow on four-layer PWB (1.6 mm FR4) and measured at room temperature. See also (*5)
(*3) DC current which causes temperature rise of 40 K. Partsare soldered by reflow on multilayer PWB with high heat dissipation performance. Note: Heat radiation constant are approx. 44 K/W measured on 6.5×6.0×3.0 mm case size and approx. 37 K/W measured on 6.5×6.0×4.5 mm case size. See also (*5)
(*4) Saturation rated current : DC current which causes L(0) drop –30 %.
(*5) Within a suitable application, the part's temperature depends on circuit design and certain heat dissipation conditions. This should be double checked in a worst case operation mode.
In normal case, the max.standard operating temperature of +150 °C should not be exceeded.
For higher operating temperature conditions, please contact Panasonic representative in your area.


Performance Characteristics (Reference)

● Inductance vs DC Current


ETQP3MR68YFN




ETQP3M1R0YFN




ETQP4M6R8YFN




ETQP4M100YFN




ETQP4M220YFN



ETQP4M300YFN




ETQP4M470YFN




● Case Temperature vs DC Current

PWB condition A : Four-layer PWB (1.6 mm FR4), See also (*2)
PWB condition B : Multilayer PWB with high heat dissipation performance. See also (*3)


ETQP3MR68YFN




ETQP3M1R0YFN




ETQP4M6R8YFN




ETQP4M100YFN




ETQP4M220YFN



ETQP4M300YFN



ETQP4M470YFN



3. Series PCC-M0754M/PCC-M0750M (ETQP5M□□□YFM/ETQP5M□□□YGM)

Standard Parts


Series	Part No.	Inductance *1		DCR (at 20 °C) (mΩ)		Rated Current (Typ. : A)		
		L0 (μH)	Tolerance (%)	Typ. (max.)	Tolerance (%)	△T=40K (*2)	△T=40K (*3)	△L=–30% (*4)
PCC-M0754M [7.5×7.0×5.4(mm)]	ETQP5M4R7YFM	4.7	±20	20(23)	±10	6.3	8.0	13.1
	ETQP5M6R8YFM	6.8		26.7(29.4)		5.5	6.9	12.1
	ETQP5M100YFM	10		37.6(41.3)		4.7	5.7	10.6
	ETQP5M220YFM	22		92(102)		3.0	3.7	5.8
	ETQP5M330YFM	33		120(132)		2.6	3.3	4.8
	ETQP5M470YFM	48		156(172)		2.3	2.9	4.1
PCC-M0750M [7.5×7.0×5.0(mm)]	ETQP5M101YGM	95		348(382.8)		1.4	1.9	3.1

(*1) Measured at 100 kHz.
(*2) DC current which causes temperature rise of 40 K. Parts are soldered by reflow on four-layer PWB (1.6 mm FR4) and measured at room temperature. See also (*5)
(*3) DC current which causes temperature rise of 40 K. Parts are soldered by reflow on multilayer PWB with high heat dissipation performance. Note: Heat radiation constant is approx. 31 K/W measured on 7.5×7.0×5.4 mm case size and approx. 29 K/W measured on 7.5×7.0×5.0 mm case size. See also (*5)
(*4) Saturation rated current : DC current which causes L(0) drop –30 %.
(*5) Within a suitable application, the part's temperature depends on circuit design and certain heat dissipation conditions. This should be double checked in a worst case operation mode.
In normal case, the max.standard operating temperature of +150 °C should not be exceeded.
For higher operating temperature conditions, please contact Panasonic representative in your area.


Performance Characteristics (Reference)

● Inductance vs DC Current


ETQP5M4R7YFM




ETQP5M6R8YFM




ETQP5M100YFM




ETQP5M220YFM




ETQP5M330YFM



ETQP5M470YFM




ETQP5M101YGM




● Case Temperature vs DC Current

PWB condition A : Four-layer PWB (1.6 mm FR4), See also (*2)
PWB condition B : Multilayer PWB with high heat dissipation performance. See also (*3)


ETQP5M4R7YFM




ETQP5M6R8YFM




ETQP5M100YFM




ETQP5M220YFM




ETQP5M330YFM



ETQP5M470YFM



ETQP5M101YGM



4. Series PCC-M0854M/PCC-M0850M (ETQP5M□□□YFK/ETQP5M□□□YGK)


Standard Parts

Series	Part No.	Inductance *1		DCR (at 20 °C) (mΩ)		Rated Current (Typ. : A)		
		L0 (μH)	Tolerance (%)	Typ. (max.)	Tolerance (%)	ΔT=40K (*2)	ΔT=40K (*3)	ΔL=–30% (*4)
PCC-M0854M [8.5×8.0×5.4(mm)]	ETQP5M2R5YFK	2.5	±20	7.6(8.4)	±10	11.9	14.0	20.1
	ETQP5M100YFK	10		33(37)		5.7	6.7	13.0
	ETQP5M150YFK	15		48.2(53.1)		4.7	5.5	7.2
	ETQP5M220YFK	22		63(70)		4.1	4.8	6.9
	ETQP5M470YFK	48		125(138)		2.9	3.4	5.4
PCC-M0850M [8.5×8.0×5.0(mm)]	ETQP5M101YGK	100		302(333)		1.7	2.1	3.0

(*1) Measured at 100 kHz.
(*2) DC current which causes temperature rise of 40 K. Parts are soldered by reflow on four-layer PWB (1.6 mm FR4) and measured at room temperature. See also (*5)
(*3) DC current which causes temperature rise of 40 K. Parts are soldered by reflow on multilayer PWB with high heat dissipation performance. Note: Heat radiation constant are approx. 27 K/W measured on 8.5×8.0×5.4 mm case size and approx. 29 K/W measured on 8.5×8.0×5.0 mm case size. See also (*5)
(*4) Saturation rated current : DC current which causes L(0) drop –30 %.
(*5) Within a suitable application, the part's temperature depends on circuit design and certain heat dissipation conditions. This should be double checked in a worst case operation mode.
In normal case, the max.standard operating temperature of + 150 °C should not be exceeded.
For higher operating temperature conditions, please contact Panasonic representative in your area.


Performance Characteristics (Reference)

● Inductance vs DC Current

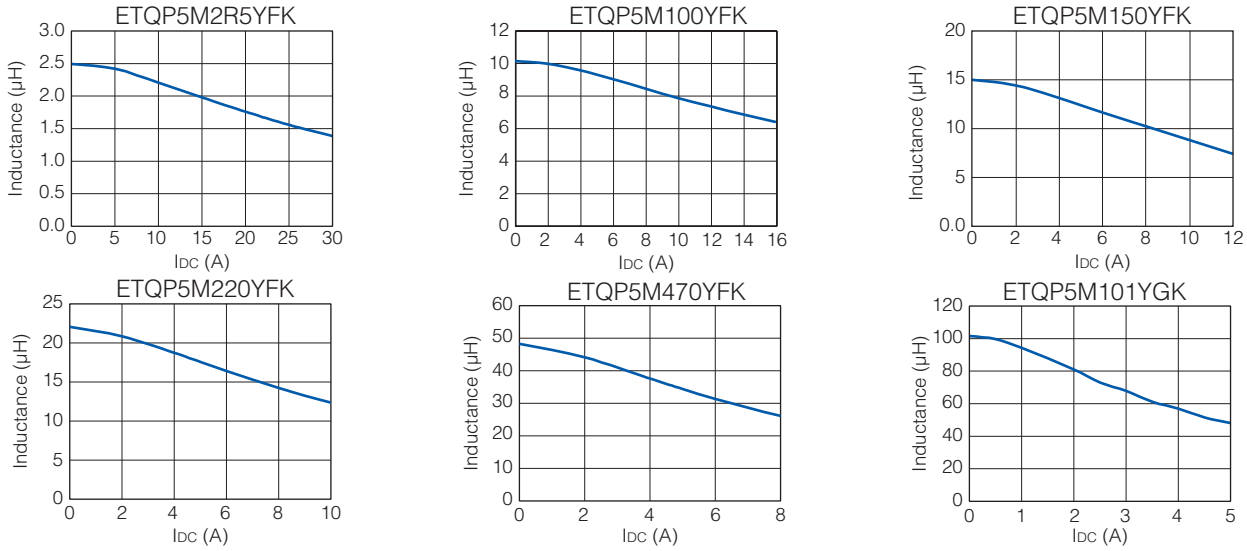

● Case Temperature vs DC Current

PWB condition A : Four-layer PWB (1.6 mm FR4), See also (*2)
PWB condition B : Multilayer PWB with high heat dissipation performance. See also (*3)

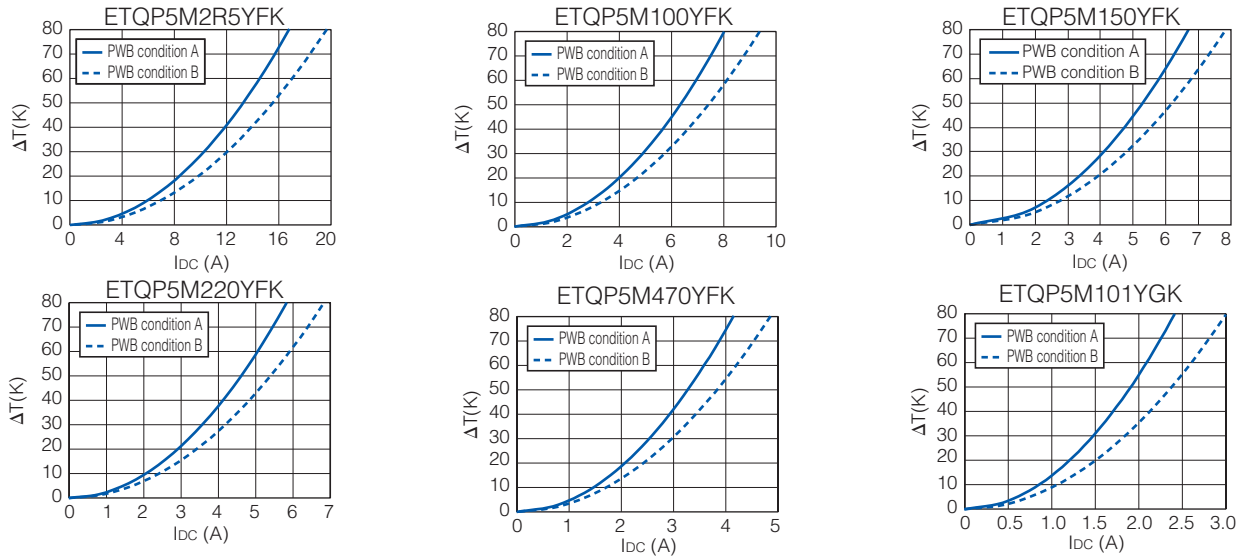

5. Series PCC-M1054M/PCC-M1050M (ETQP5M□□□YFC/ETQP5M□□□YGC)


Standard Parts


Series	Part No.	Inductance *1		DCR (at 20 °C) (mΩ)		Rated Current (Typ. : A)		
		L0 (μH)	Tolerance (%)	Typ. (max.)	Tolerance (%)	△T=40K (*2)	△T=40K (*3)	△L=−30% (*4)
PCC-M1054M [10.7×10.0×5.4(mm)]	ETQP5M1R5YFC	1.45	±20	3.8(4.2)	±10	17.9	21.4	35.1
	ETQP5M2R5YFC	2.5		5.3(5.9)		15.1	18.1	27.2
	ETQP5M3R3YFC	3.3		7.1(7.9)		13.1	15.7	22.7
	ETQP5M4R7YFC	4.7		10.2(11.3)		10.9	13.1	20.0
	ETQP5M100YFC	10		23.8(26.2)		7.1	8.5	10.7
	ETQP5M150YFC	15		35.6(39.16)		5.8	7.0	12.0
	ETQP5M220YFC	22		45(50)		5.2	6.2	8.8
	ETQP5M330YFC	32.5		68.5(75.4)		4.2	5.0	7.6
	ETQP5M470YFC	47		99(108.9)		3.5	4.2	6.8
	ETQP5M680YFC	66		136(149.6)		3.0	3.6	4.9
PCC-M1050M [10.7×10.0×5.0(mm)]	ETQP5M101YGC	97		208(229)		2.2	2.7	3.0


(*1) Measured at 100 kHz.
(*2) DC current which causes temperature rise of 40 K. Parts are soldered by reflow on four-layer PWB (1.6 mm FR4) and measured at room temperature. See also (*5)
(*3) DC current which causes temperature rise of 40 K. Parts are soldered by reflow on multilayer PWB with high heat dissipation performance. Note: Heat radiation constant are approx. 23 K/W measured on 10.7×10.0×5.4 mm case size and approx. 26 K/W measured on 10.7×10.0×5.0 mm case size. See also (*5)
(*4) Saturation rated current : Dc current which causes L(0) drop −30 %.
(*5) Within a suitable application, the part's temperature depends on circuit design and certain heat dissipation conditions. This should be double checked in a worst case operation mode.
In normal case, the max.standard operating temperature of +150 °C should not be exceeded.
For higher operating temperature conditions, please contact Panasonic representative in your area.


Performance Characteristics (Reference)


● Inductance vs DC Current































● Case Temperature vs DC Current

PWB condition A : Four-layer PWB (1.6 mm FR4), See also (*2)
PWB condition B : Multilayer PWB with high heat dissipation performance. See also (*3)


ETQP5M1R5YFC




ETQP5M2R5YFC




ETQP5M3R3YFC




ETQP5M4R7YFC




ETQP5M100YFC




ETQP5M150YFC




ETQP5M220YFC




ETQP5M330YFC




ETQP5M101YGC



ETQP5M470YFC



ETQP5M680YFC



6. Series PCC-M1050ML/PCC-M1060ML (ETQP5M□□□YLC/ETQP6M□□□YLC)

Standard Parts


Series	Part No.	Inductance *1		DCR (at 20 °C) (mΩ)		Rated Current (Typ. : A)		
		L0 (μH)	Tolerance (%)	Typ. (max.)	Tolerance (%)	△T=40K (*2)	△T=40K (*3)	△L=–30% (*4)
PCC-M1050ML [10.9×10.0×5.0(mm)]	ETQP5MR33YLC	0.33	±20	1.1(1.21)	±10	33.2	39.7	56.7
	ETQP5MR68YLC	0.68		1.75(1.93)		26.3	31.5	40.0
	ETQP5M1R0YLC	1.0		2.3(2.53)		23.0	27.5	37.8
	ETQP5M2R0YLC	2.0		4.6(5.06)		16.2	19.4	31.3
PCC-M1060ML [10.9×10.0×6.0(mm)]	ETQP6M1R5YLC	1.5		3.2(3.52)		19.5	23.3	32.0
	ETQP6M2R5YLC	2.5		4.55(5.0)		16.3	19.6	25.8
	ETQP6M3R3YLC	3.3		6.0(6.6)		14.2	17.0	26.3
	ETQP6M4R7YLC	4.7		8.7(9.57)		11.8	14.1	22.5

(*1) Measured at 100 kHz.
(*2) DC current which causes temperature rise of 40 K. Parts are soldered by reflow on four-layer PWB (1.6 mm FR4) and measured at room temperature. See also (*5)
(*3) DC current which causes temperature rise of 40 K. Parts are soldered by reflow on multilayer PWB with high heat dissipation performance. Note: Heat radiation constant are approx. 23 K/W measured on 10.9×10.0×5.0 mm case size and approx. 23 K/W measured on 10.9×10.0×6.0 mm case size. See also (*5)
(*4) Saturation rated current : Dc current which causes L(0) drop –30 %.
(*5) Within a suitable application, the part's temperature depends on circuit design and certain heat dissipation conditions. This should be double checked in a worst case operation mode.
In normal case, the max.standard operating temperature of +150 °C should not be exceeded.
For higher operating temperature conditions, please contact Panasonic representative in your area.


Performance Characteristics (Reference)

● Inductance vs DC Current


ETQP5MR33YLC

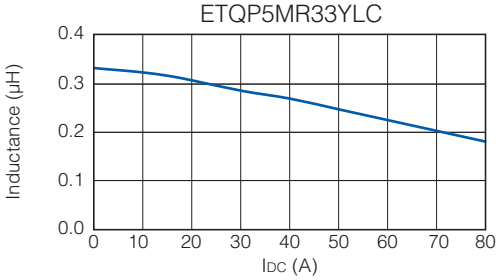


ETQP5MR68YLC

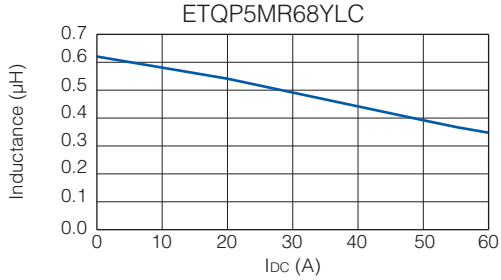


ETQP5M1R0YLC

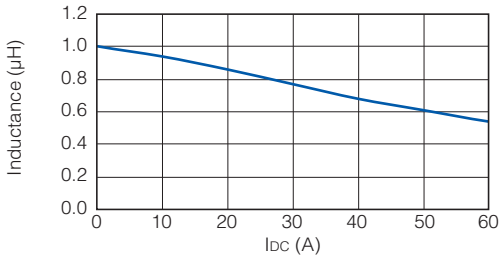


ETQP5M2R0YLC

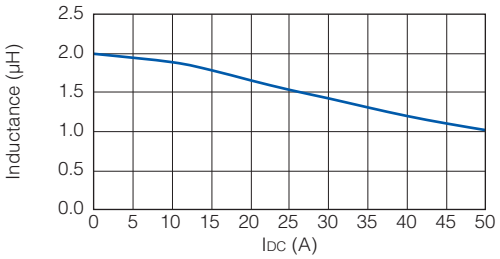


ETQP6M1R5YLC

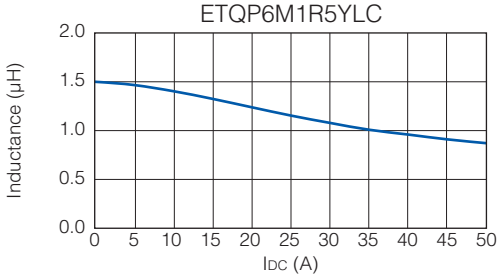


ETQP6M2R5YLC

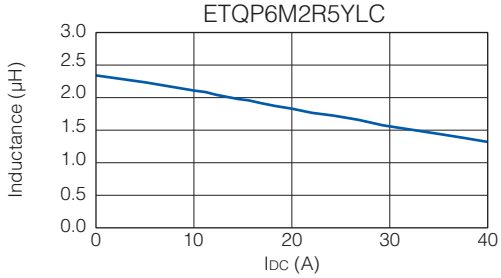

ETQP6M3R3YLC

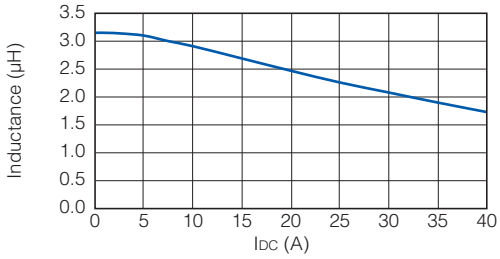


ETQP6M4R7YLC

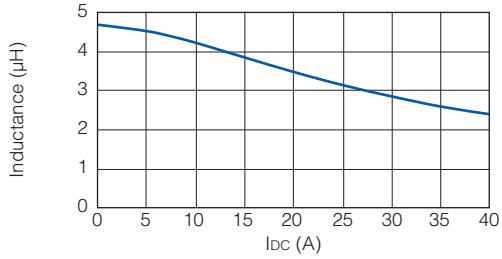


● Case Temperature vs DC Current

PWB condition A : Four-layer PWB (1.6 mm FR4), See also (*2)
PWB condition B : Multilayer PWB with high heat dissipation performance. See also (*3)


ETQP5MR33YLC

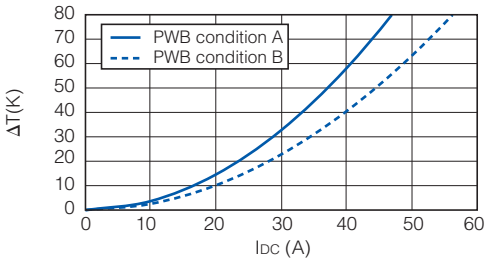


ETQP5MR68YLC

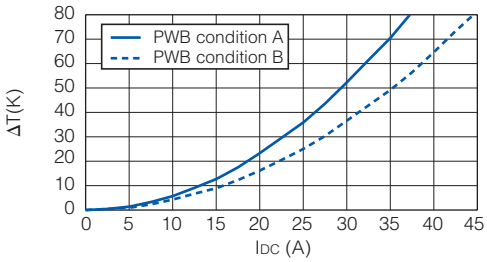


ETQP5M1R0YLC

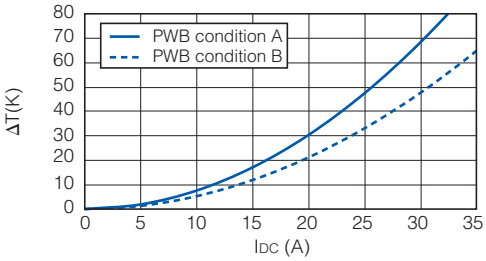


ETQP5M2R0YLC

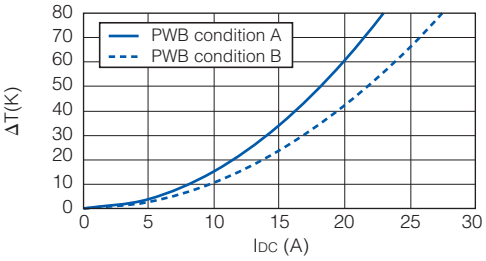


ETQP6M1R5YLC

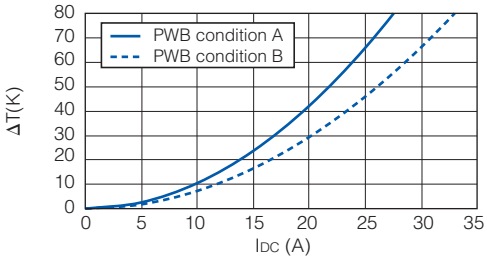


ETQP6M2R5YLC

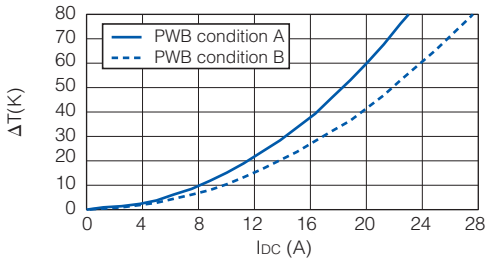

ETQP6M3R3YLC

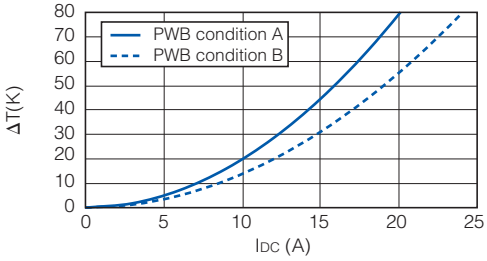


ETQP6M4R7YLC

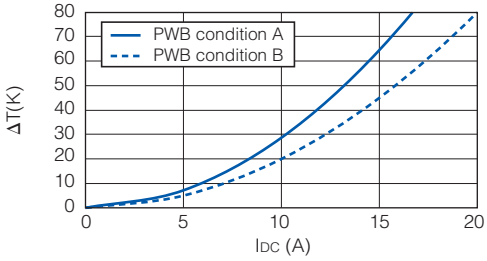

Dimensions in mm (not to scale)


Dimensional tolerance unless noted : ±0.5

Series PCC-M0530M
Series PCC-M0540M
(ETQP3M□□□YFP/ETQP4M□□□YFP)

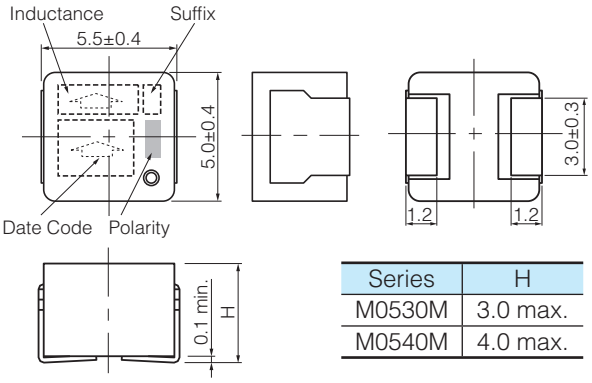


Series	H
M0530M	3.0 max.
M0540M	4.0 max.

Series PCC-M0630M
Series PCC-M0645M
(ETQP3M□□□YFN/ETQP4M□□□YFN)

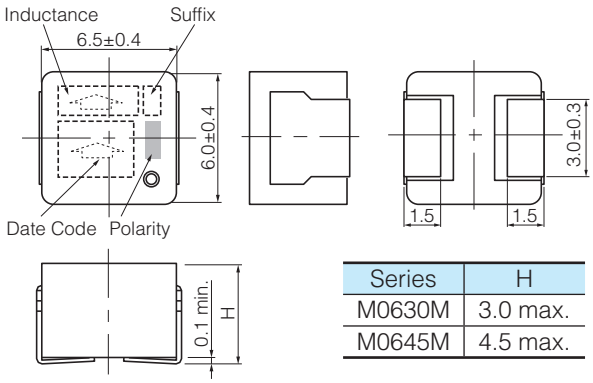


Series	H
M0630M	3.0 max.
M0645M	4.5 max.

Series PCC-M0754M
Series PCC-M0750M
(ETQP5M□□□YFM/YGM)

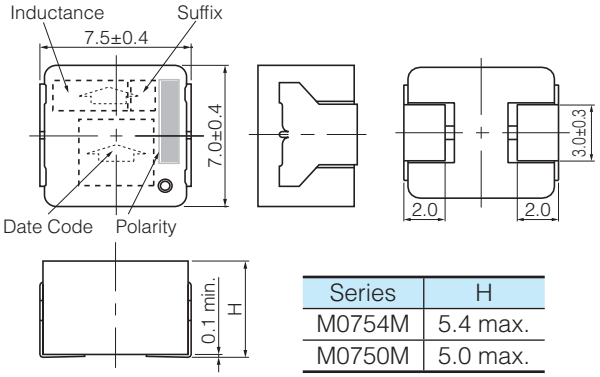


Series	H
M0754M	5.4 max.
M0750M	5.0 max.

Series PCC-M0854M
Series PCC-M0850M
(ETQP5M□□□YFK/YGK)

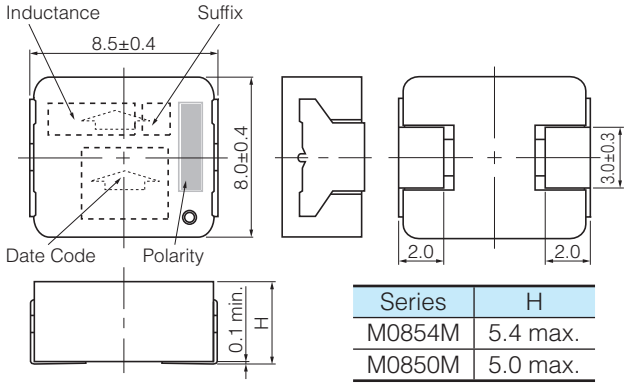


Series	H
M0854M	5.4 max.
M0850M	5.0 max.

Series PCC-M1054M
Series PCC-M1050M
(ETQP5M□□□YFC/YGC)

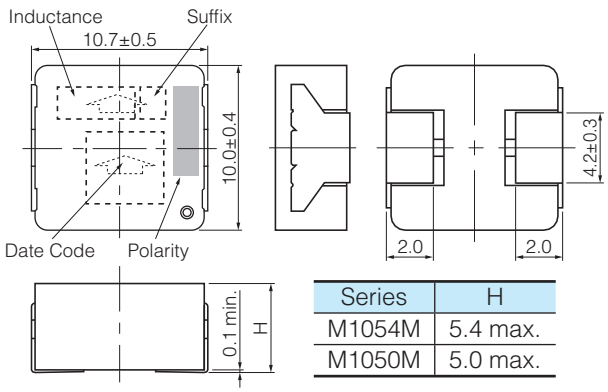

Series	H
M1054M	5.4 max.
M1050M	5.0 max.

Series PCC-M1050ML
Series PCC-M1060ML
(ETQP5M□□□YLC/ETQP6M□□□YLC)

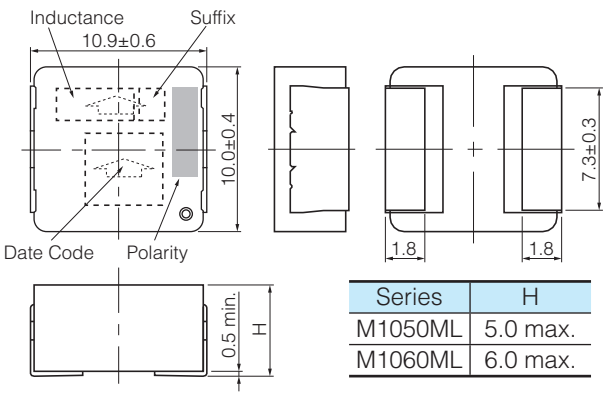


Series	H
M1050ML	5.0 max.
M1060ML	6.0 max.

Recommended Land Pattern in mm (not to scale)


Dimensional tolerance unless noted : ±0.5

Series PCC-M0530M
Series PCC-M0540M
(ETQP3M□□□YFP/ETQP4M□□□YFP)




Don't wire on the pattern on shaded portion the PWB.

Series PCC-M0630M
Series PCC-M0645M
(ETQP3M□□□YFN/ETQP4M□□□YFN)




The same as the left.

Series PCC-M0754M
Series PCC-M0750M
(ETQP5M□□□YFM/YGM)




The same as the left.

Series PCC-M0854M
Series PCC-M0850M
(ETQP5M□□□YFK/YGK)




Don't wire on the pattern on shaded portion the PWB.

Series PCC-M1054M
Series PCC-M1050M
(ETQP5M□□□YFC/YGC)



The same as the left.

Series PCC-M1050ML
Series PCC-M1060ML
(ETQP5M□□□YLC/ETQP6M□□□YLC)




The same as the left.

■ As for Soldering Conditions and Safety Precautions (Power Choke Coils (Automotive Grade)),

Please see Data Files


Packaging Methods (Taping)

● Embossed Carrier Tape Dimensions in mm (not to scale)

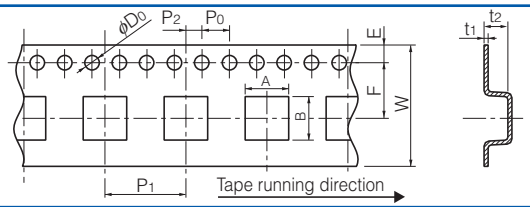

Series	A	B	W	E	F	P_1	P_2	P_0	ϕD_0	t_1	t_2
PCC-M0530M	5.6	6.1	16.0	1.75	7.5	12.0	2.0	4.0	1.5	0.4	3.3
PCC-M0540M											4.3
PCC-M0630M	7.1	6.6									3.3
PCC-M0645M											5.0
PCC-M0754M/M0750M	8.1	7.6									6.0
PCC-M0854M/M0850M	9.1	8.6									
PCC-M1054M/M1050M PCC-M1050ML/M1060ML	10.7	11.9	24.0		11.5	16.0				0.5	6.3


● Taping Reel Dimensions in mm (not to scale)



Standard Reel Dimensions

Series	A	B	C	D	E	W
PCC-M0530M/M0540M PCC-M0630M/M0645M PCC-M0754M/M0750M PCC-M0854M/M0850M	330	100	13	21	2	17.5
PCC-M1054M/M1050M PCC-M1050ML/M1060ML						25.5

Component Placement (Taping)

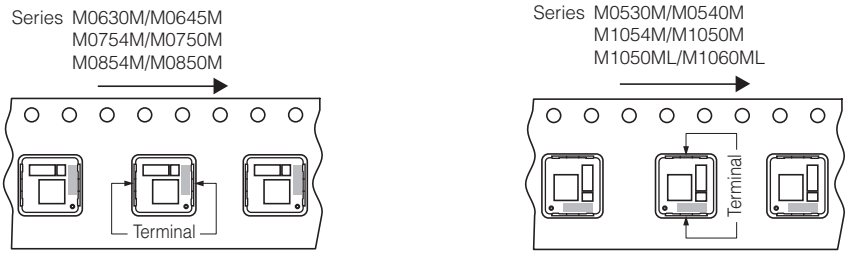

Standard Packing Quantity/Reel

Series	Part No.	Minimum Quantity / Packing Unit	Quantity per reel
PCC-M0530M	ETQP3M□□□YFP	2,000 pcs. / box (2 reel)	1,000 pcs.
PCC-M0540M	ETQP4M□□□YFP		
PCC-M0630M	ETQP3M□□□YFN		
PCC-M0645M	ETQP4M□□□YFN	1,000 pcs. / box (2 reel)	500 pcs.
PCC-M0754M	ETQP5M□□□YFM		
PCC-M0750M	ETQP5M□□□YGM		
PCC-M0854M	ETQP5M□□□YFK		
PCC-M0850M	ETQP5M□□□YGK		
PCC-M1054M	ETQP5M□□□YFC		
PCC-M1050M	ETQP5M□□□YGC		
PCC-M1050ML	ETQP5M□□□YLC		
PCC-M1060ML	ETQP6M□□□YLC		

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Power Choke Coil (Automotive Grade)

Series: PCC-M1050MS (MC)



High heat resistance and high reliability
Using metal composite core (MC)

Industrial Property : patents 18 (Registered 10/Pending 8)

Features

- The vibration-resistant structure achieves a vibration acceleration-resistance of 50 G or higher in 150 °C environments
- Reduce core loss in high frequency band (More than 2 MHz)
- High heat resistance : Operation up to 150 °C including self-heating
- SMD type
- High-reliability : High vibration resistance as result of newly developed integral construction; under severe reliability conditions of automotive and other strenuous applications
- High bias current : Excellent inductance stability using ferrous alloy magnetic material
- Temp. stability : Excellent inductance stability over broad temp. range
- Low audible (buzz) noise : New metal composite core technology
- High efficiency : Low R_{DC} of winding and low eddy-current loss of the core
- Shielded construction
- AEC-Q200 Automotive qualified
- RoHS compliant

Recommended Applications

- ECU placed in the engine itself, mechanical-electrical-integrated ECU
- Noise filter for various drive circuitry requiring high temp. operation and peak current handling capability
- Boost-Converter, Buck-Converter DC/DC

Standard Packing Quantity (Minimum Quantity/Packing Unit)

- 1,000 pcs./box (2 reel)

Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11	12
E	T	Q	P		M				Y	S	
Product Code			Classification	Height	Winding	Inductance			Core	Suffix	Size

R68 → 0.68 µH

C : □10 mm size

Temperature rating

Operating temperature range		Tc : -40 °C to +150 °C(Including self-temperature rise)
Storage condition	After PWB mounting	
	Before PWB mounting	Ta : -5 °C to +35 °C 85%RH max.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Standard Parts


Series	Part No.	Inductance *1		DCR (at 20 °C) (mΩ)		Rated Current (Typ. : A)		
		L0 (μH)	Tolerance (%)	Typ. (max.)	Tolerance (%)	ΔT=40K		ΔL=–30%
						(*2)	(*3)	(*4)
PCC-M1050MS [10.9×10.0×5.0(mm)]	ETQP5MR68YSC	0.68	±20	1.66 (1.83)	±10	27.0	32.3	40.0

(*1) Measured at 100 kHz.
(*2) DC current which causes temperature rise of 40 K. Parts are soldered by reflow on four-layer PWB (1.6 mm FR4) and measured at room temperature. See also (*5)
(*3) DC current which causes temperature rise of 40 K. Parts are soldered by reflow on multilayer PWB with high heat dissipation performance. Note: Heat radiation constant are approx. 20 K/W measured on 10.9×10.0×5.0 mm case size. See also (*5)
(*4) Saturation rated current : Dc current which causes L(0) drop –30 %.
(*5) Within a suitable application, the part's temperature depends on circuit design and certain heat dissipation conditions. This should be double checked in a worst case operation mode.
In normal case, the max.standard operating temperature of +150 °C should not be exceeded.
For higher operating temperature conditions, please contact Panasonic representative in your area.

Performance Characteristics (Reference)

● Inductance vs DC Current


ETQP5MR68YSC

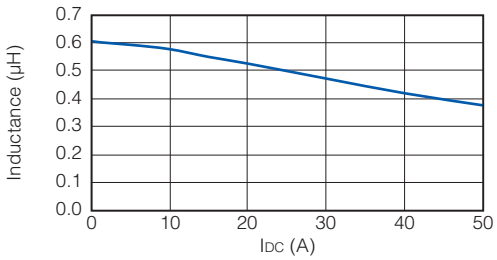

● Case Temperature vs DC Current

PWB condition A : Four-layer PWB (1.6 mm FR4), See also (*2)
PWB condition B : Multilayer PWB with high heat dissipation performance. See also (*3)


ETQP5MR68YSC

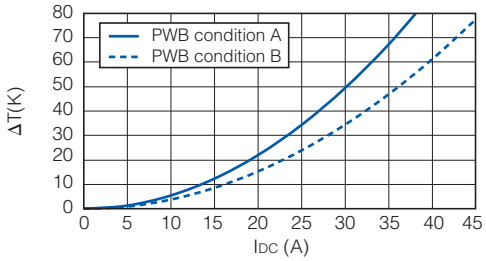

Dimensions in mm (not to scale)

Dimensional tolerance unless noted : ±0.5

Series PCC-M1050MS
(ETQR5M□□□YSC)

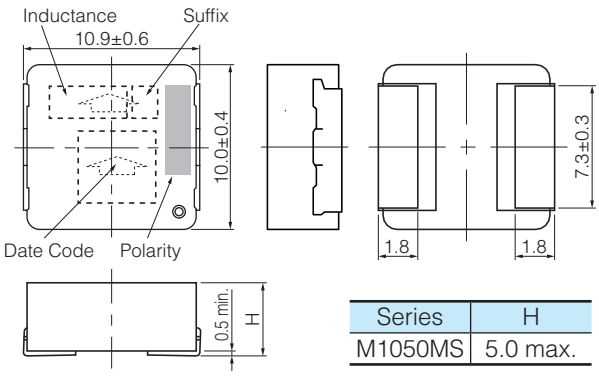


Series	H
M1050MS	5.0 max.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Recommended Land Pattern in mm (not to scale)

Dimensional tolerance unless noted : ±0.5

Series PCC-M1050MS
(ETQR5M□□□YSC)

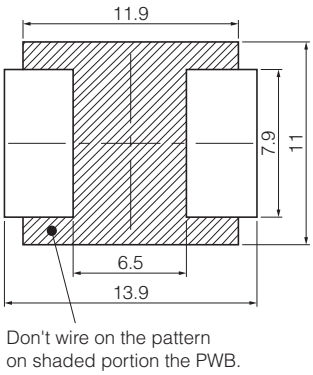


■ As for Soldering Conditions and Safety Precautions (Power Choke Coils (Automotive Grade)),

Please see Data Files


Packaging Methods (Taping)

● Embossed Carrier Tape Dimensions in mm (not to scale)

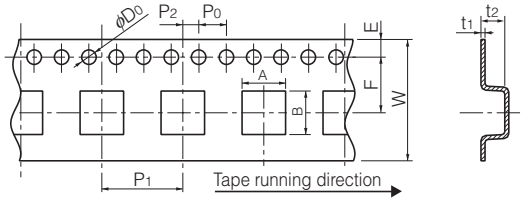

Series	A	B	W	E	F	P_1	P_2	P_0	ϕD_0	t_1	t_2
PCC-M1050MS	10.7	11.9	24.0	1.75	11.5	16.0	2.0	4.0	1.5	0.5	6.3


● Taping Reel Dimensions in mm (not to scale)



Standard Reel Dimensions

Series	A	B	C	D	E	W
PCC-M1050MS	330	100	13	21	2	25.5

Component Placement (Taping)



Standard Packing Quantity/Reel

Series	Part No.	Minimum Quantity / Packing Unit	Quantity per reel
PCC-M1050MS	ETQP5M□□□YSC	1,000 pcs. / box (2 reel)	500 pcs.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Power Choke Coil (Automotive Grade)

Series: PCC-M1280MF (MC)



High heat resistance and high reliability
Using metal composite core (MC)


Industrial Property : patents 3 (Registered 1/Pending 2)

Features

- High heat resistance : Operation up to 160 °C including self-heating
- Large current Power : 53 A (R33 type)
- High vibration resistance : 30G
- SMD type
- High-reliability : High vibration resistance as result of newly developed integral construction; under severe reliability conditions of automotive and other strenuous applications
- High bias current : Excellent inductance stability using ferrous alloy magnetic material (Fig.1)
- Temp. stability : Excellent inductance stability over broad temp. range
- Low audible (buzz) noise : New metal composite core technology
- High efficiency : Low R_{DC} of winding and low eddy-current loss of the core
- Shielded construction
- AEC-Q200 Automotive qualified
- RoHS compliant

● Fig.1 Inductance v.s. DC current

ETQR8MR33JFA(reference)

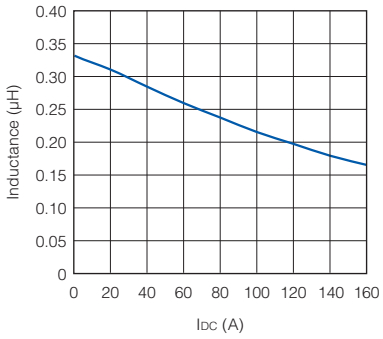

Recommended Applications

- Noise filter for various drive circuitry requiring high temp. operation and peak current handling capability
- Boost-Converter, Buck-Converter DC/DC

Standard Packing Quantity (Minimum Quantity/Packing Unit)

- 500 pcs./box (2 reel)

Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11	12
E	T	Q	P	8	M				J		
Product Code			Classification	Height	Winding	Inductance			Core	Suffix	Size

Inductance: R68→0.68µ H, 4R7→ 4.7µ H

Suffix: A

Size: □12 mm size

Temperature rating

Operating temperature range		Tc : –40 °C to +160 °C(Including self-temperature rise)
Storage condition	After PWB mounting	
	Before PWB mounting	Ta : –5 °C to +35 °C 85%RH max.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Standard Parts

Series	Part No.	Inductance *1		DCR (at 20 °C) (mΩ)		Rated Current (Typ. : A)		
		L0 (μH)	Tolerance (%)	Typ. (max.)	Tolerance (%)	△T=40K		△L=–30%
						(*2)	(*3)	(*4)
PCC-M1280MF [12.6×13.2×8.0(mm)]	▲ ETQP8MR33JFA	0.33	±20	0.70 (0.77)	±10	44.4	53.5	84.5
	ETQP8MR68JFA	0.68		1.10 (1.21)		35.4	42.6	56.9
	ETQP8M1R0JFA	1.0		1.36 (1.50)		31.8	38.3	44.4
	ETQP8M1R5JFA	1.5		1.80 (1.98)		27.7	33.3	29.9
	ETQP8M2R5JFA	2.5		2.60 (2.86)		23.0	27.7	32.1
PCC-M1280MF [12.6×13.1×8.0(mm)]	ETQP8M3R3JFA	3.3		3.60 (3.96)		19.6	23.6	27.6
	ETQP8M4R7JFA	4.7		4.90 (5.39)		16.8	20.2	24.7

▲ Under development

(*1) Measured at 100k Hz.

(*2) DC current which causes temperature rise of 40K. Parts are soldered by reflow on four-layer PWB (1.6 mm FR4) and measured at room temperature. See also (*5)

(*3) DC current which causes temperature rise of 40K. Parts are soldered by reflow on multilayer PWB with high heat dissipation performance. Note: Heat radiation constant are approx. 20 K/W measured. See also (*5)


(*4) Saturation rated current : DC current which causes L(0) drop –30 %.

(*5) Within a suitable application, the part's temperature depends on circuit design and certain heat dissipation conditions. This should be double checked in a worst case operation mode.
In normal case, the max.standard operating temperature of +160 °C should not be exceeded.
For higher operating temperature conditions, please contact Panasonic representative in your area.


Performance Characteristics (Reference)

● Inductance vs DC Current


▲ ETQP8MR33JFA

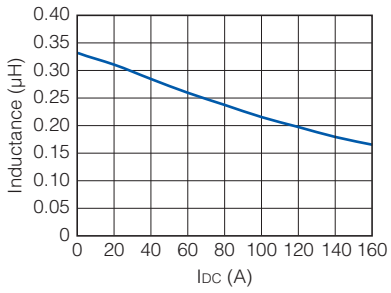


ETQP8MR68JFA

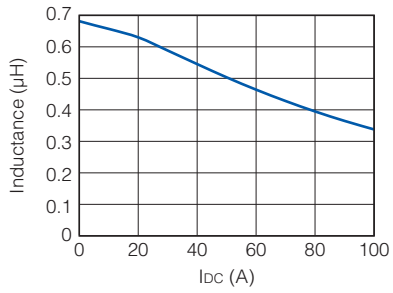


ETQP8M1R0JFA

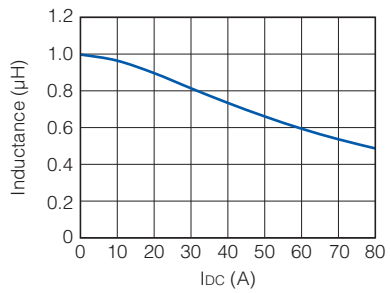


ETQP8M1R5JFA

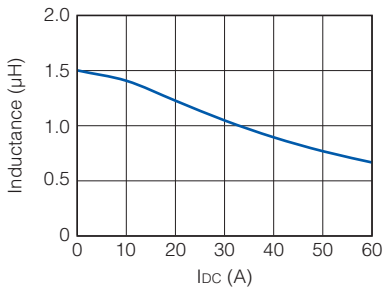


ETQP8M2R5JFA

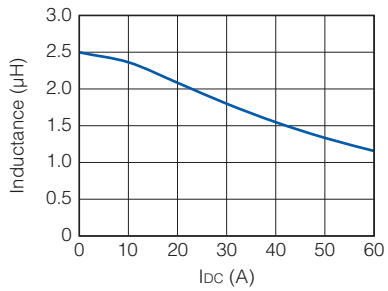

ETQP8M3R3JFA

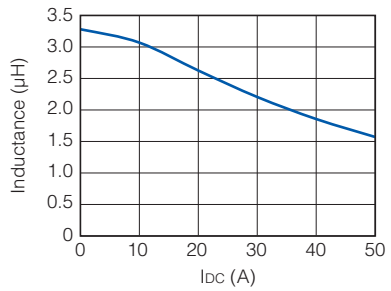

ETQP8M4R7JFA

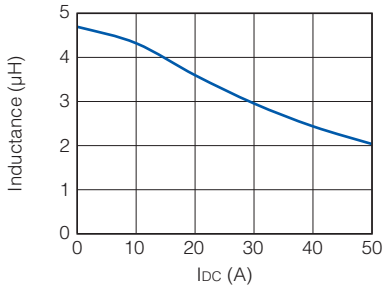


▲ Under development

Performance Characteristics (Reference)


● Case Temperature vs DC Current

PWB condition A : Four-layer PWB (1.6 mm FR4), See also (*2)
PWB condition B : Multilayer PWB with high heat dissipation performance. See also (*3)


▲ ETQP8MR33JFA

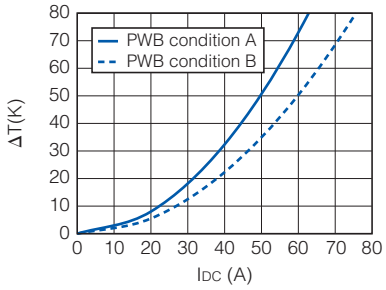


ETQP8MR68JFA

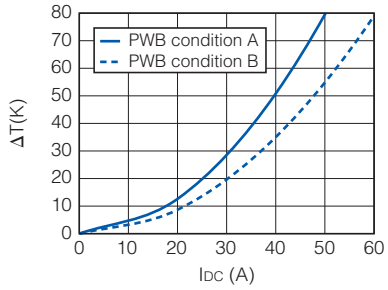


ETQP8M1R0JFA

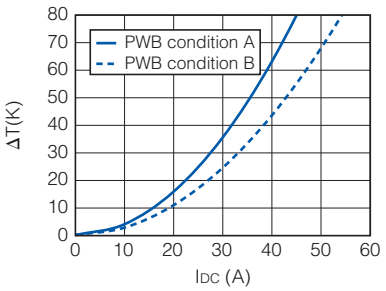


ETQP8M1R5JFA

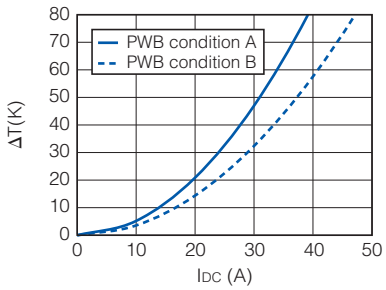


ETQP8M2R5JFA

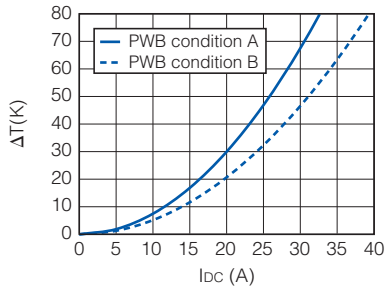

ETQP8M3R3JFA

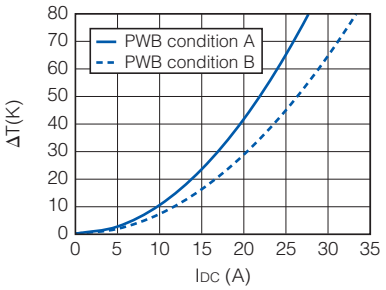

ETQP8M4R7JFA

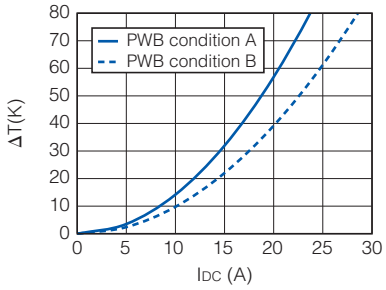



▲ Under development

Dimensions in mm (not to scale)

Dimensional tolerance unless noted : ±0.5

- ETQP8MR33JFA
- ETQP8MR68JFA
- ETQP8M1R0JFA
- ETQP8M1R5JFA
- ETQP8M2R5JFA
- ETQP8M3R3JFA
- ETQP8M4R7JFA

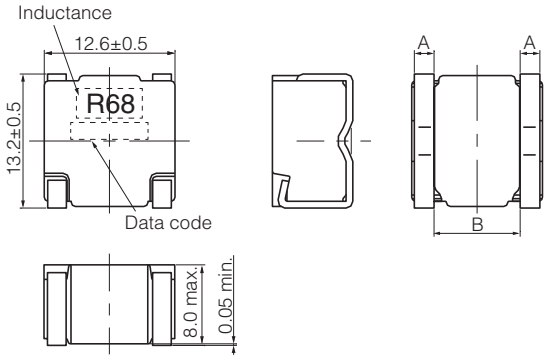

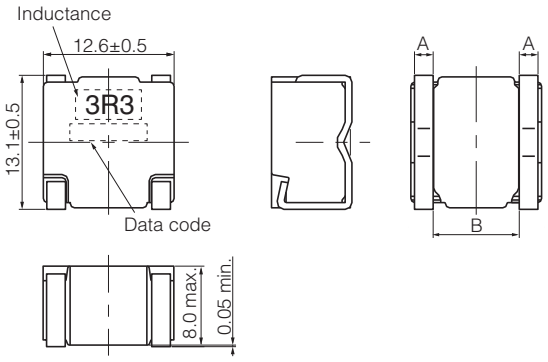


Part No.	A	B
ETQP8MR33JFA	2.25±0.2	7.3±1.0
ETQP8MR68JFA	2.1±0.4	8.0±1.0
ETQP8M1R0JFA	2.1±0.4	8.0±1.0
ETQP8M1R5JFA	2.1±0.4	8.0±1.0
ETQP8M2R5JFA	1.8±0.4	8.6±0.85

Part No.	A	B
ETQP8M3R3JFA	1.5±0.4	8.8±1.05
ETQP8M4R7JFA	1.25±0.4	9.0±1.25

Recommended Land Pattern in mm (not to scale)


Dimensional tolerance unless noted : ±0.5

- ETQP8MR33JFA

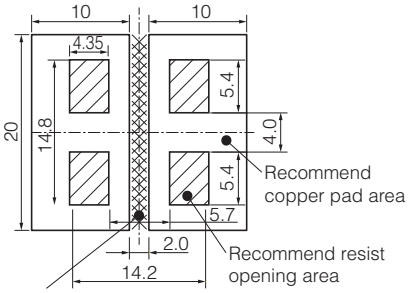


Don't wire this portion with PWB.

- ETQP8M4R7JFA

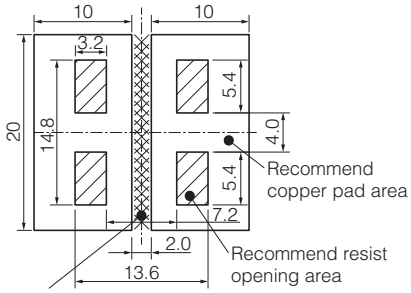


Don't wire this portion with PWB.

- ETQP8M3R3JFA

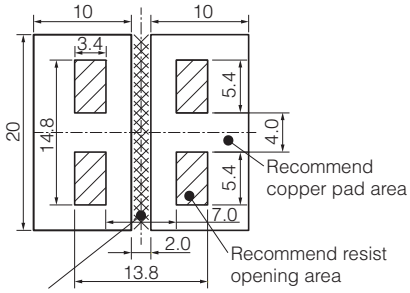


Don't wire this portion with PWB.

- ETQP8M2R5JFA

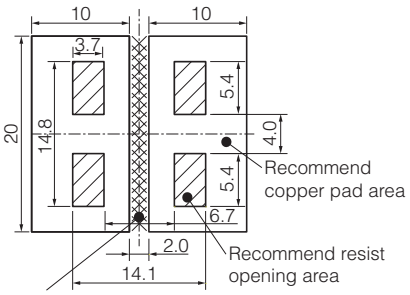

Don't wire this portion with PWB.

- ETQP8MR68JFA
- ETQP8M1R0JFA
- ETQP8M1R5JFA

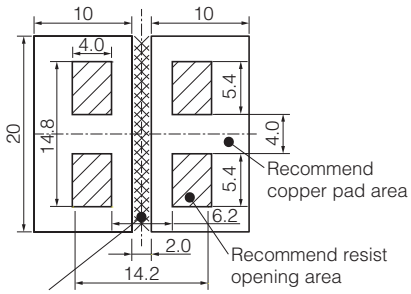


Don't wire this portion with PWB.

■ As for Soldering Conditions and Safety Precautions (Power Choke Coils (Automotive Grade)),


Please see Data Files

Packaging Methods (Taping)


● Embossed Carrier Tape Dimensions in mm (not to scale)

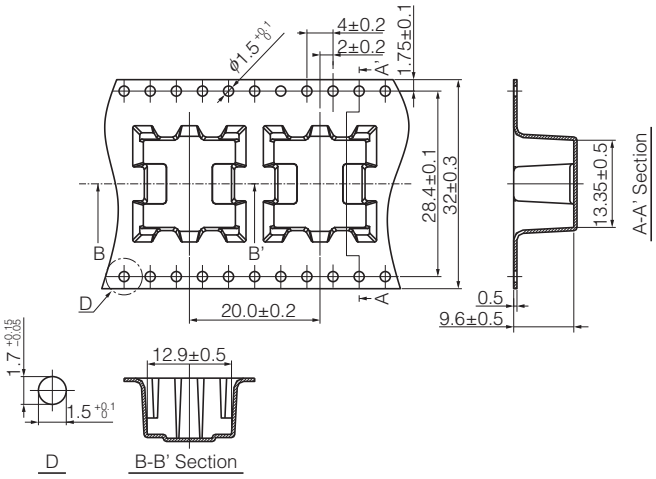

● Component Placement (Taping)

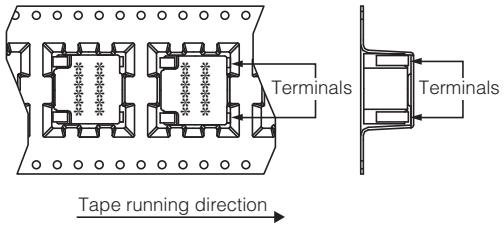

● Taping Reel Dimensions in mm (not to scale)

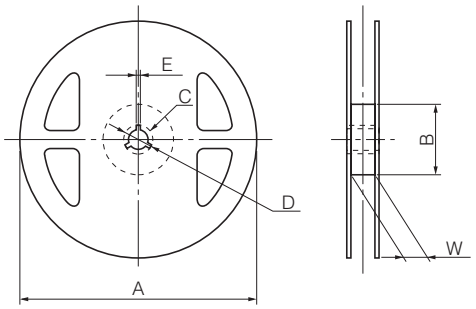

Standard Reel Dimensions

Series	A	B	C	D	E	W
PCC-M1280MF	330	(100)	13	21	2	33.5

Power Choke Coil (Automotive Grade)

Series: **PCC-M0530M-LP(MC)**
PCC-M0630M-LP(MC)
PCC-M0840M-LP(MC)
PCC-M1040M-LP(MC)



High heat resistance and high reliability
Using metal composite core (MC)


Industrial Property : patents 3 (Registered 2/Pending 1)

Features

- High heat resistance : Operation up to 155 °C including self-heating
- Low profile : 3 mm max. height (PCC-M0530M-LP, PCC-M0630M-LP)
  4 mm max. height (PCC-M0840M-LP, PCC-M1040M-LP)
- SMD type
- High-reliability : High vibration resistance as result of newly developed integral construction; under severe reliability conditions of automotive and other strenuous applications
- High bias current : Excellent inductance stability using ferrous alloy magnetic material (Fig.1)
- Temp. stability : Excellent inductance stability over broad temp. range
- Low audible (buzz) noise : A gapless structure achieved with metal composite core
- High efficiency : Low DC resistance of winding and low eddy-current loss of the core
- Shielded construction
- AEC-Q200 Automotive qualified
- RoHS compliant

● Fig.1 Inductance v.s. DC current

ETQP4M4R7KVC(reference)

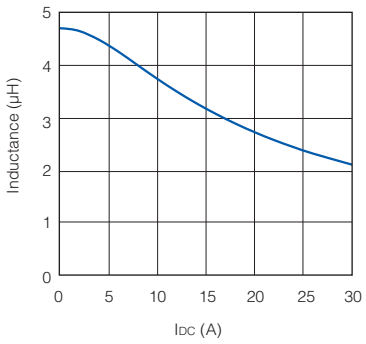

Recommended Applications

- Noise filter for various drive circuitry requiring high temp. operation and peak current handling capability
- Boost-Converter, Buck-Converter DC/DC

Standard Packing Quantity (Minimum Quantity/Packing Unit)

- 4,000 pcs./box (2 reel) : PCC-M0530M-LP, PCC-M0630M-LP
- 1,000 pcs./box (2 reel) : PCC-M0840M-LP, PCC-M1040M-LP

Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11	12
E	T	Q	P		M				K	V	
Product Code			Classification	Height	Winding	Inductance			Core	Suffix	Size

Inductance	
4R7→	4.7 µH
220→	22 µH
R68→	0.68 µH

Size	
P	□ 5 mm size
N	□ 6 mm size
K	□ 8 mm size
C	□10 mm size

Temperature rating

Operating temperature range		Tc : –55 °C to +155 °C(Including self-temperature rise)
Storage condition	After PWB mounting	
	Before PWB mounting	Ta : –5 °C to +35 °C 85%RH max.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

1. Series PCC-M0530M-LP (ETQP3M□□□KVP)

Standard Parts


Series	Part No.	Inductance *1		DCR (at 20 °C) (mΩ)		Rated Current (Typ. : A)		
		L0 (μH)	Tolerance (%)	Typ. (max.)	Tolerance (%)	△T=40K (*2)	△T=40K (*3)	△L=–30% (*4)
PCC-M0530M-LP [5.5×5.0×3.0(mm)]	ETQP3M100KVP	10.00	±20	96 (105.6)	±10	2.4	2.9	4.2
	ETQP3M6R8KVP	6.80		65.7 (72.27)		2.9	3.5	6.1
	ETQP3M4R7KVP	4.70		45.6 (50.16)		3.4	4.1	6.7
	ETQP3M3R3KVP	3.30		27.3 (30.03)		4.4	5.4	8.0
	ETQP3M2R2KVP	2.20		20 (22)		5.2	6.3	10.1
	ETQP3M1R5KVP	1.50		12 (13.2)		6.7	8.1	12.0
	ETQP3M1R0KVP	1.00		9.6 (10.56)		7.5	9.0	14.1
	ETQP3MR68KVP	0.68		7.6 (8.36)		8.4	10.2	15.9

(*1) Measured at 100k Hz.
(*2) DC current which causes temperature rise of 40K. Parts are soldered by reflow on four-layer PWB (1.6 mm FR4) and measured at room temperature. See also (*5)
(*3) DC current which causes temperature rise of 40K. Parts are soldered by reflow on multilayer PWB with high heat dissipation performance. Note: Heat radiation constant are approx. 51 K/W measured on 5.5×5.0×3.0 mm case size. See also (*5)
(*4) Saturation rated current : DC current which causes L(0) drop –30 %.
(*5) Within a suitable application, the part's temperature depends on circuit design and certain heat dissipation conditions. This should be double checked in a worst case operation mode.
In normal case, the max.standard operating temperature of +155 °C should not be exceeded.
For higher operating temperature conditions, please contact Panasonic representative in your area.


Performance Characteristics (Reference)

● Inductance vs DC Current


ETQP3M100KVP

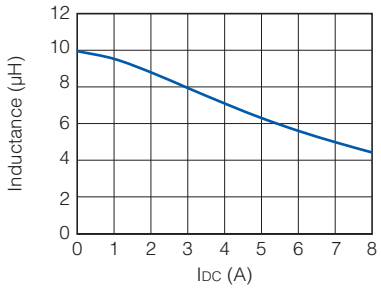


ETQP3M6R8KVP

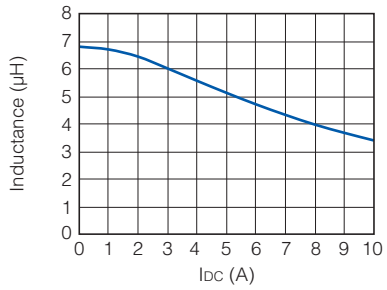


ETQP3M4R7KVP

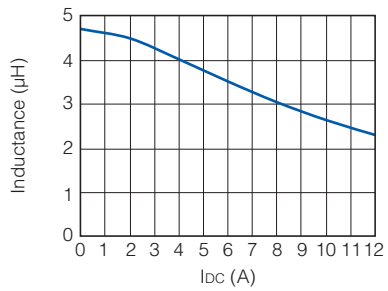


ETQP3M3R3KVP

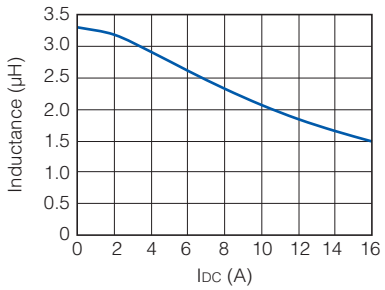


ETQP3M2R2KVP

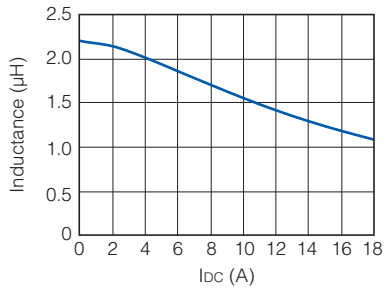


ETQP3M1R5KVP

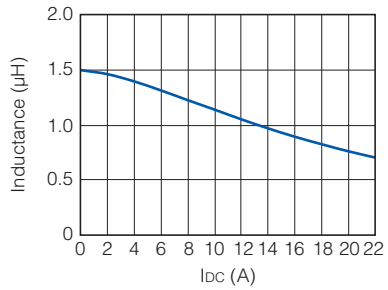

ETQP3M1R0KVP

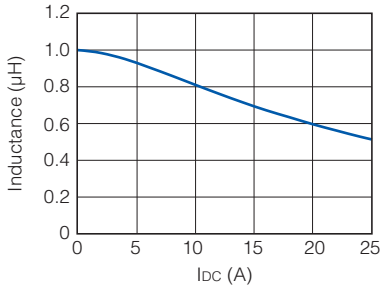

ETQP3MR68KVP

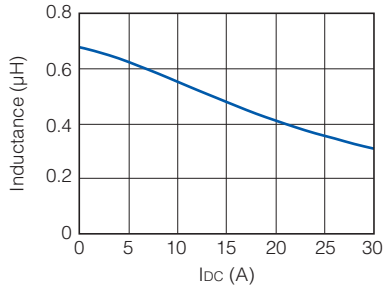


Performance Characteristics (Reference)


● Case Temperature vs DC Current

PWB condition A : Four-layer PWB (1.6 mm FR4), See also (*2)
PWB condition B : Multilayer PWB with high heat dissipation performance. See also (*3)


ETQP3M100KVP

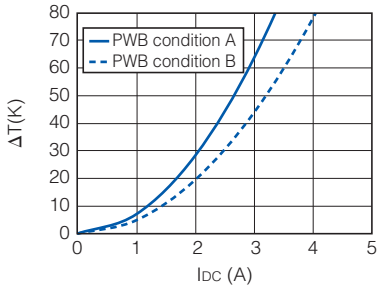


ETQP3M6R8KVP

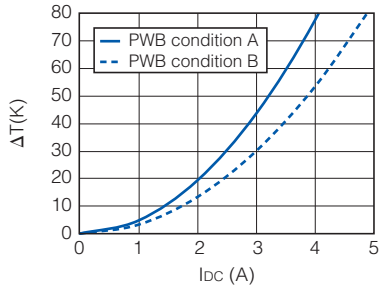


ETQP3M4R7KVP

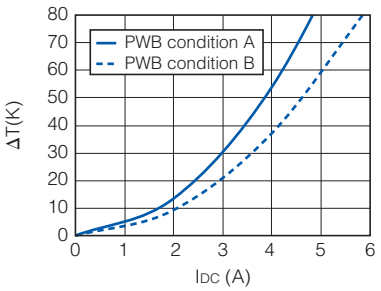


ETQP3M3R3KVP

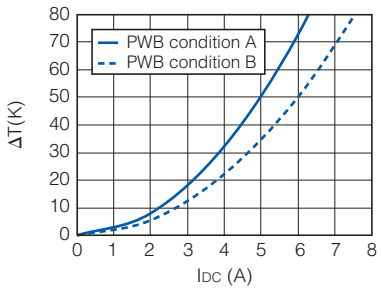


ETQP3M2R2KVP

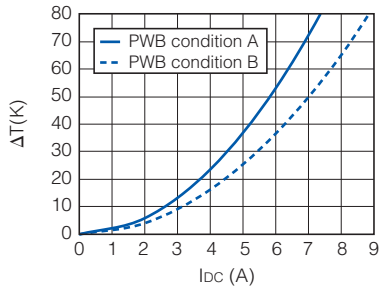


ETQP3M1R5KVP

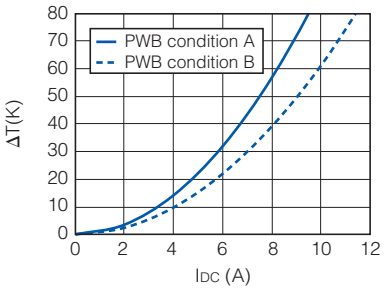

ETQP3M1R0KVP

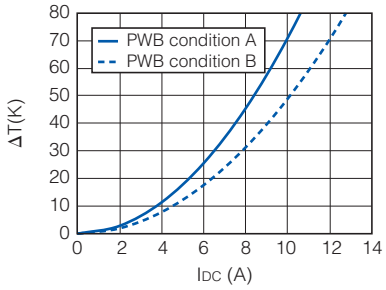

ETQP3MR68KVP

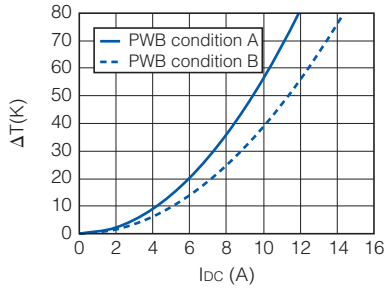

2. Series PCC-M0630M-LP (ETQP3M□□□KVN)

Standard Parts


Series	Part No.	Inductance *1		DCR (at 20 °C) (mΩ)		Rated Current (Typ. : A)		
		L0 (μH)	Tolerance (%)	Typ. (max.)	Tolerance (%)	ΔT=40K (*2)	ΔT=40K (*3)	ΔL=–30% (*4)
PCC-M0630M-LP [6.4×6.0×3.0(mm)]	ETQP3M330KVN	33.00	±20	206 (226.6)	±10	1.7	2.1	3.0
	ETQP3M220KVN	22.00		128 (140.8)		2.2	2.7	4.3
	ETQP3M150KVN	15.00		99.2 (109.12)		2.5	3.0	5.1
	ETQP3M100KVN	10.00		71 (78.1)		2.9	3.6	5.8
	ETQP3M6R8KVN	6.80		45.6 (50.16)		3.6	4.5	8.1
	ETQP3M4R7KVN	4.70		29 (31.9)		4.6	5.6	9.8
	ETQP3M3R3KVN	3.30		24.1 (26.51)		5.0	6.1	11.5
	ETQP3M2R2KVN	2.20		14.5 (15.95)		6.5	7.9	12.8
	ETQP3M1R5KVN	1.50		11 (12.1)		7.4	9.1	14.2
	ETQP3M1R0KVN	1.00		6.2 (6.82)		9.9	12.1	16.0
	ETQP3MR68KVN	0.68		5.2 (5.72)		10.8	13.2	20.2

(*1) Measured at 100k Hz.
(*2) DC current which causes temperature rise of 40K. Parts are soldered by reflow on four-layer PWB (1.6 mm FR4) and measured at room temperature. See also (*5)
(*3) DC current which causes temperature rise of 40K. Parts are soldered by reflow on multilayer PWB with high heat dissipation performance. Note: Heat radiation constant are approx. 44 K/W measured on 6.5×6.0×3.0 mm case size. See also (*5)
(*4) Saturation rated current : DC current which causes L(0) drop –30 %.
(*5) Within a suitable application, the part's temperature depends on circuit design and certain heat dissipation conditions. This should be double checked in a worst case operation mode.
In normal case, the max.standard operating temperature of +155 °C should not be exceeded.
For higher operating temperature conditions, please contact Panasonic representative in your area.


Performance Characteristics (Reference)

● Inductance vs DC Current


ETQP3M330KVN




ETQP3M220KVN




ETQP3M150KVN




ETQP3M100KVN




ETQP3M6R8KVN




ETQP3M4R7KVN




ETQP3M3R3KVN




ETQP3M2R2KVN




ETQP3M1R5KVN



ETQP3M1R0KVN



ETQP3MR68KVN




Performance Characteristics (Reference)


● Case Temperature vs DC Current

PWB condition A : Four-layer PWB (1.6 mm FR4), See also (*2)
PWB condition B : Multilayer PWB with high heat dissipation performance. See also (*3)


ETQP3M330KVN




ETQP3M220KVN




ETQP3M150KVN




ETQP3M100KVN




ETQP3M6R8KVN




ETQP3M4R7KVN




ETQP3M3R3KVN




ETQP3M2R2KVN




ETQP3M1R5KVN



ETQP3M1R0KVN



ETQP3MR68KVN



3. Series PCC-M0840M-LP (ETQP4M□□□KVK)

Standard Parts


Series	Part No.	Inductance *1		DCR (at 20 °C) (mΩ)		Rated Current (Typ. : A)		
		L0 (μH)	Tolerance (%)	Typ. (max.)	Tolerance (%)	ΔT=40K (*2)	ΔT=40K (*3)	ΔL=–30% (*4)
PCC-M0840M-LP [8.5×8.0×4.0(mm)]	ETQP4M330KVK	33.00	±20	118 (129.8)	±10	2.6	3.1	5.3
	ETQP4M220KVK	22.00		78.4 (86.24)		3.2	3.8	6.7
	ETQP4M150KVK	15.00		55 (60.5)		3.8	4.5	7.7
	ETQP4M100KVK	10.00		41.6 (45.76)		4.4	5.2	9.1
	ETQP4M6R8KVK	6.80		23.5 (25.85)		5.9	6.9	11.0
	ETQP4M4R7KVK	4.70		16.1 (17.71)		7.1	8.3	15.1
	ETQP4M3R3KVK	3.30		14.1 (15.51)		7.6	8.9	17.4
	ETQP4M2R2KVK	2.20		8.5 (9.35)		9.8	11.4	20.4
	ETQP4M1R5KVK	1.50		4.9 (5.39)		12.8	15.1	22.5
	ETQP4M1R0KVK	1.00		3.7 (4.07)		14.8	17.3	24.4
	ETQP4MR68KVK	0.68		2.92 (3.21)		16.6	19.5	29.0

(*1) Measured at 100k Hz.
(*2) DC current which causes temperature rise of 40K. Parts are soldered by reflow on four-layer PWB (1.6 mm FR4) and measured at room temperature. See also (*5)
(*3) DC current which causes temperature rise of 40K. Parts are soldered by reflow on multilayer PWB with high heat dissipation performance. Note: Heat radiation constant are approx. 36 K/W measured on 8.5×8.0×4.0 mm case size. See also (*5)
(*4) Saturation rated current : DC current which causes L(0) drop –30 %.
(*5) Within a suitable application, the part's temperature depends on circuit design and certain heat dissipation conditions. This should be double checked in a worst case operation mode.
In normal case, the max.standard operating temperature of +155 °C should not be exceeded.
For higher operating temperature conditions, please contact Panasonic representative in your area.


Performance Characteristics (Reference)

● Inductance vs DC Current


ETQP4M330KVK




ETQP4M220KVK




ETQP4M150KVK




ETQP4M100KVK




ETQP4M6R8KVK




ETQP4M4R7KVK




ETQP4M3R3KVK




ETQP4M2R2KVK




ETQP4M1R5KVK



ETQP4M1R0KVK



ETQP4MR68KVK




Performance Characteristics (Reference)


● Case Temperature vs DC Current

PWB condition A : Four-layer PWB (1.6 mm FR4), See also (*2)
PWB condition B : Multilayer PWB with high heat dissipation performance. See also (*3)


ETQP4M330KVK




ETQP4M220KVK




ETQP4M150KVK




ETQP4M100KVK




ETQP4M6R8KVK




ETQP4M4R7KVK




ETQP4M3R3KVK




ETQP4M2R2KVK




ETQP4M1R5KVK



ETQP4M1R0KVK



ETQP4MR68KVK



4. Series PCC-M1040M-LP (ETQP4M□□□KVC)

Standard Parts


Series	Part No.	Inductance *1		DCR (at 20 °C) (mΩ)		Rated Current (Typ. : A)		
		L0 (μH)	Tolerance (%)	Typ. (max.)	Tolerance (%)	ΔT=40K (*2)	ΔT=40K (*3)	ΔL=–30% (*4)
PCC-M1040M-LP [10.7×10.0×4.0(mm)]	ETQP4M470KVC	47.00	±20	132 (145.2)	±10	2.8	3.4	4.7
	ETQP4M330KVC	33.00		84.6 (93.06)		3.4	4.2	5.6
	ETQP4M220KVC	22.00		60 (66)		4.1	5.0	7.4
	ETQP4M150KVC	15.00		37 (40.7)		5.2	6.3	9.2
	ETQP4M100KVC	10.00		25.4 (27.94)		6.3	7.6	10.8
	ETQP4M6R8KVC	6.80		18.5 (20.35)		7.4	8.9	12.1
	▲ETQP4M4R7KVC	4.70		11.8 (12.98)		9.2	11.2	13.9
	ETQP4M3R3KVC	3.30		9.4 (10.34)		10.3	12.6	17.1
	ETQP4M2R2KVC	2.20		6.8 (7.48)		12.1	14.8	21.0
	ETQP4M1R5KVC	1.50		4.9 (5.39)		14.3	17.4	25.0
	ETQP4M1R0KVC	1.00		2.6 (2.86)		19.6	23.9	34.6

(*1) Measured at 100k Hz.
(*2) DC current which causes temperature rise of 40K. Parts are soldered by reflow on four-layer PWB (1.6 mm FR4) and measured at room temperature. See also (*5)
(*3) DC current which causes temperature rise of 40K. Parts are soldered by reflow on multilayer PWB with high heat dissipation performance. Note: Heat radiation constant are approx. 27 K/W measured on 10.7×10.0×4.0 mm case size. See also (*5)
(*4) Saturation rated current : DC current which causes L(0) drop –30 %.
(*5) Within a suitable application, the part's temperature depends on circuit design and certain heat dissipation conditions. This should be double checked in a worst case operation mode.
In normal case, the max.standard operating temperature of +155 °C should not be exceeded.
For higher operating temperature conditions, please contact Panasonic representative in your area.
▲ Under development (Start of mass production: the 2nd half of 2018) Please contact us for customized part no.


Performance Characteristics (Reference)

● Inductance vs DC Current


ETQP4M470KVC




ETQP4M330KVC




ETQP4M220KVC




ETQP4M150KVC




ETQP4M100KVC




ETQP4M6R8KVC




▲ETQP4M4R7KVC




ETQP4M3R3KVC




ETQP4M2R2KVC



ETQP4M1R5KVC



ETQP4M1R0KVC




▲ Under development

Performance Characteristics (Reference)


● Case Temperature vs DC Current

PWB condition A : Four-layer PWB (1.6 mm FR4), See also (*2)
PWB condition B : Multilayer PWB with high heat dissipation performance. See also (*3)


ETQP4M470KVC




ETQP4M330KVC




ETQP4M220KVC




ETQP4M150KVC




ETQP4M100KVC




ETQP4M6R8KVC




▲ETQP4M4R7KVC




ETQP4M3R3KVC




ETQP4M2R2KVC



ETQP4M1R5KVC



ETQP4M1R0KVC




▲ Under development


Dimensions in mm (not to scale)

Dimensional tolerance unless noted : ±0.5


Series PCC-M0530M-LP
(ETQP3M□□□KVP)

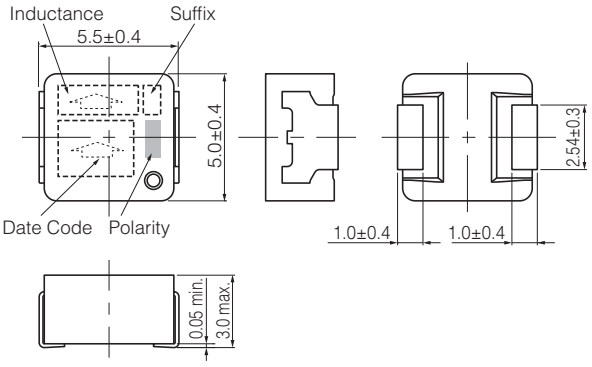


Series PCC-M0630M-LP
(ETQP3M□□□KVN)

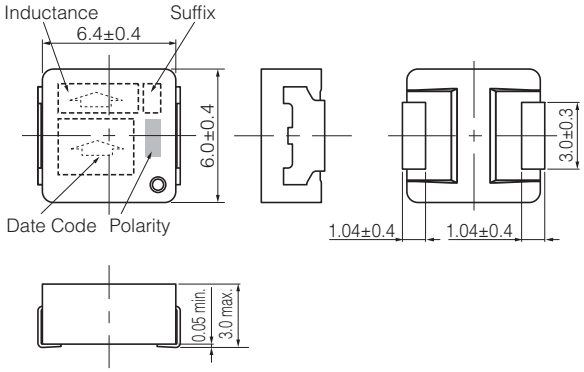


Series PCC-M0840M-LP
(ETQP4M□□□KVK)

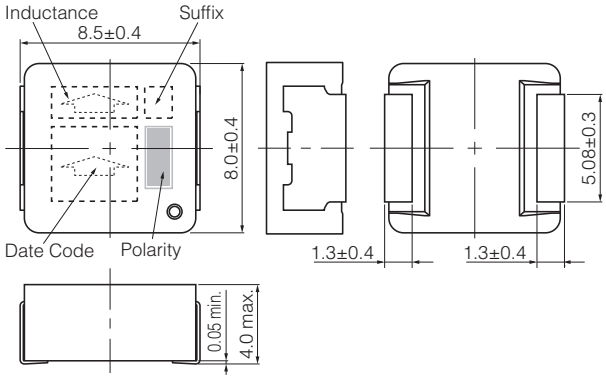

Series PCC-M1040M-LP
(ETQP4M□□□*KVC)
* Exemption "1R0"

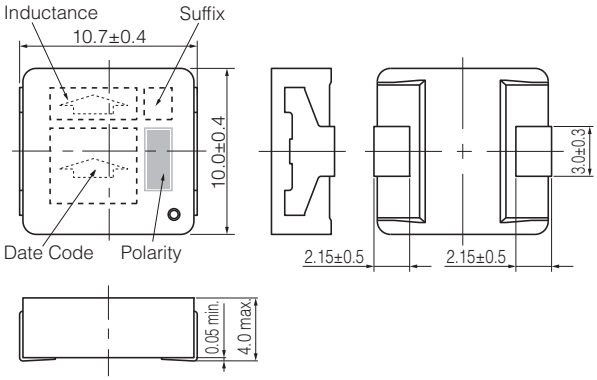


Series PCC-M1040M-LP
(ETQP4M1R0KVC)

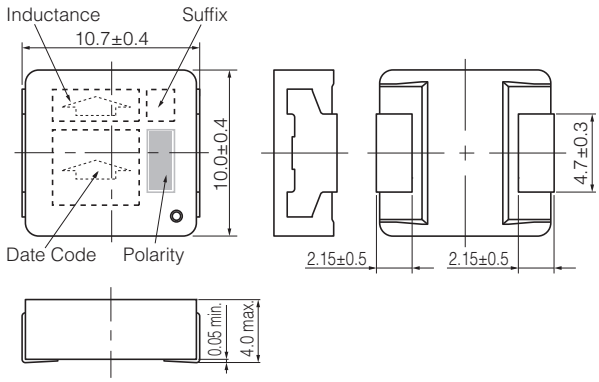

Recommended Land Pattern in mm (not to scale)


Dimensional tolerance unless noted : ±0.5

Series PCC-M0530M-LP
(ETQP3M□□□KVP)




Don't wire on the pattern
on shaded portion the PWB.

Series PCC-M0630M-LP
(ETQP3M□□□KVN)




The same as the left.

Series PCC-M0840M-LP
(ETQP4M□□□KVK)




The same as the left.

Series PCC-M1040M-LP
(ETQP4M□□□*KVC)
✻ Exemption "1R0"



Don't wire on the pattern
on shaded portion the PWB.

Series PCC-M1040M-LP
(ETQP4M1R0KVC)




The same as the left.

■ As for Soldering Conditions and Safety Precautions (Power Choke Coils (Automotive Grade)),

Please see Data Files


Packaging Methods (Taping)

● Embossed Carrier Tape Dimensions in mm (not to scale)

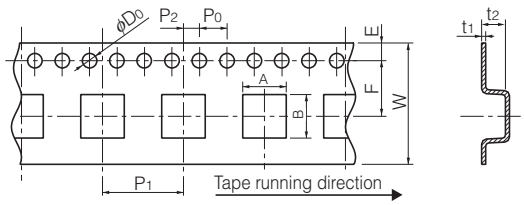


Series	A	B	W	E	F	P_1	P_2	P_0	ϕD_0	t_1	t_2
PCC-M0530M-LP	5.6	6.1	16	1.75	7.5	8	2	4	1.5	0.3	3.3
PCC-M0630M-LP	6.5	7.1	16	1.75	7.5	8	2	4	1.5	0.3	3.3
PCC-M0840M-LP	8.63	9.1	16	1.75	7.5	12	2	4	1.5	0.4	6.0
PCC-M1040M-LP	10.65	11.75	24	1.75	11.5	16	2	4	1.5	0.5	6.35

● Taping Reel Dimensions in mm (not to scale)



Series	A	B	C	D	E	W
PCC-M0530M-LP PCC-M0630M-LP PCC-M0840M-LP	330	(100)	13	21	2	17.5
PCC-M1040M-LP						25.5

Component Placement (Taping)

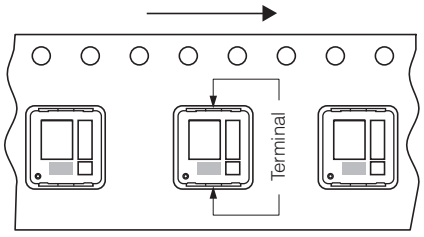

Series M0530M-LP
M0630M-LP
M0840M-LP
M1040M-LP

Standard Packing Quantity/Reel

Series	Part No.	Minimum Quantity / Packing Unit	Quantity per reel
PCC-M0530M-LP	ETQP3M□□□KVP	4,000 pcs. / box (2 reel)	2,000 pcs.
PCC-M0630M-LP	ETQP3M□□□KVN	4,000 pcs. / box (2 reel)	2,000 pcs.
PCC-M0840M-LP	ETQP4M□□□KVK	1,000 pcs. / box (2 reel)	500 pcs.
PCC-M1040M-LP	ETQP4M□□□KVC	1,000 pcs. / box (2 reel)	500 pcs.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Power Choke Coil (Automotive Grade)

Series: **PCC-M0648M-LE(MC)**
PCC-M0748M-LE(MC)



High heat resistance and high reliability
Using metal composite core (MC)

Industrial Property : patents 3 (Registered 2/Pending 1)

Features

- Low loss (Low DC resistance)
- High heat resistance : Operation up to 150 °C including self-heating
- SMD type
- High-reliability : High vibration resistance as result of newly developed integral construction; under severe reliability conditions of automotive and other strenuous applications
- High bias current : Excellent inductance stability using ferrous alloy magnetic material
- Temp. stability : Excellent inductance stability over broad temp. range
- Low audible (buzz) noise : A gapless structure achieved with metal composite core
- High efficiency : Low DC resistance of winding and low eddy-current loss of the core
- Shielded construction
- AEC-Q200 Automotive qualified
- RoHS compliant

Recommended Applications

- Noise filter for various drive circuitry requiring high temp. operation and peak current handling capability
- Boost-Converter, Buck-Converter DC/DC

Standard Packing Quantity (Minimum Quantity/Packing Unit)

- 1,000 pcs./box (2 reel)

Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11	12
E	T	Q	P		M				K	F	
Product Code			Classification	Height	Winding	Inductance			Core	Suffix	Size

Inductance: 4R7→ 4.7 µH; 220→ 22 µH

Suffix	Size
N	□6 mm size
M	□7 mm size

Temperature rating

Operating temperature range		Tc : –40 °C to +150 °C(Including self-temperature rise)
Storage condition	After PWB mounting	
	Before PWB mounting	Ta : –5 °C to +35 °C 85%RH max.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

1. Series PCC-M0648M-LE (ETQP4M□□□KFN)


Standard Parts

Series	Part No.	Inductance *1		DCR (at 20 °C) (mΩ)		Rated Current (Typ. : A)		
		L0 (μH)	Tolerance (%)	Typ. (max.)	Tolerance (%)	ΔT=40K (*2)	ΔT=40K (*3)	ΔL=–30% (*4)
PCC-M0648M-LE [6.4×6.0×4.8(mm)]	ETQP4M3R3KFN	3.30	±20	13.10 (14.41)	±10	7.2	9.2	12.0
	ETQP4M4R7KFN	4.70		20.70 (22.77)		5.7	7.3	9.3
	ETQP4M100KFN	10.00		40.40 (44.44)		4.1	5.2	8.1
	ETQP4M150KFN	15.00		63.80 (70.18)		3.3	4.2	6.7

(*1) Measured at 100k Hz.
(*2) DC current which causes temperature rise of 40K. Parts are soldered by reflow on four-layer PWB (1.6 mm FR4) and measured at room temperature. See also (*5)
(*3) DC current which causes temperature rise of 40K. Parts are soldered by reflow on multilayer PWB with high heat dissipation performance. Note: Heat radiation constant are approx. 30 K/W measured on 6.4×6.0×4.8 mm case size. See also (*5)
(*4) Saturation rated current : DC current which causes L(0) drop –30 %.
(*5) Within a suitable application, the part's temperature depends on circuit design and certain heat dissipation conditions. This should be double checked in a worst case operation mode.
In normal case, the max.standard operating temperature of +150 °C should not be exceeded.
For higher operating temperature conditions, please contact Panasonic representative in your area.


Performance Characteristics (Reference)

● Inductance vs DC Current

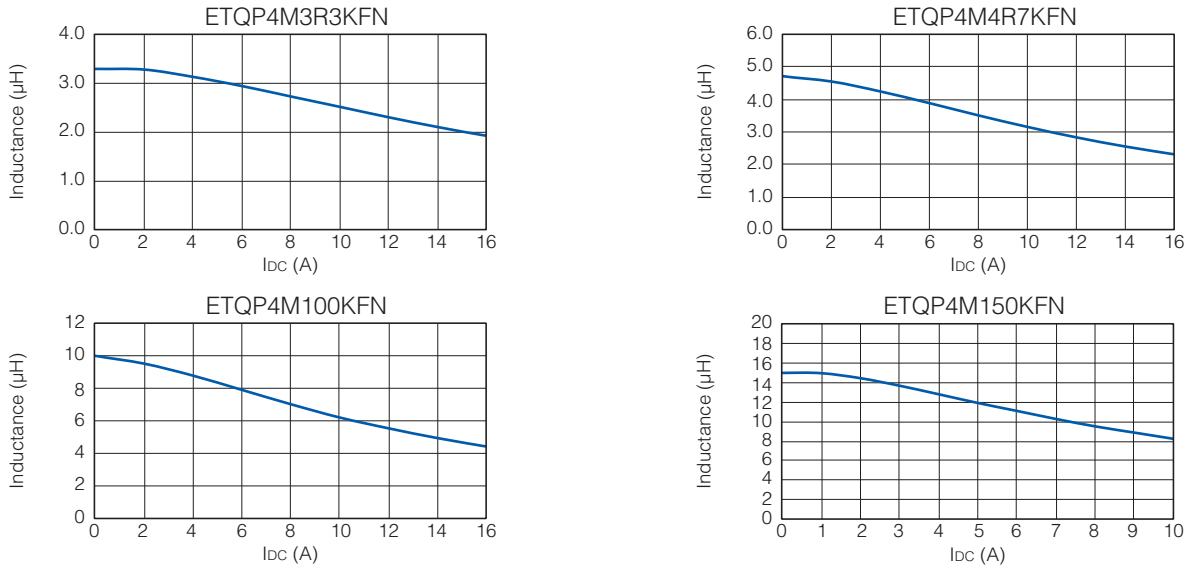

● Case Temperature vs DC Current

PWB condition A : Four-layer PWB (1.6 mm FR4), See also (*2)
PWB condition B : Multilayer PWB with high heat dissipation performance. See also (*3)

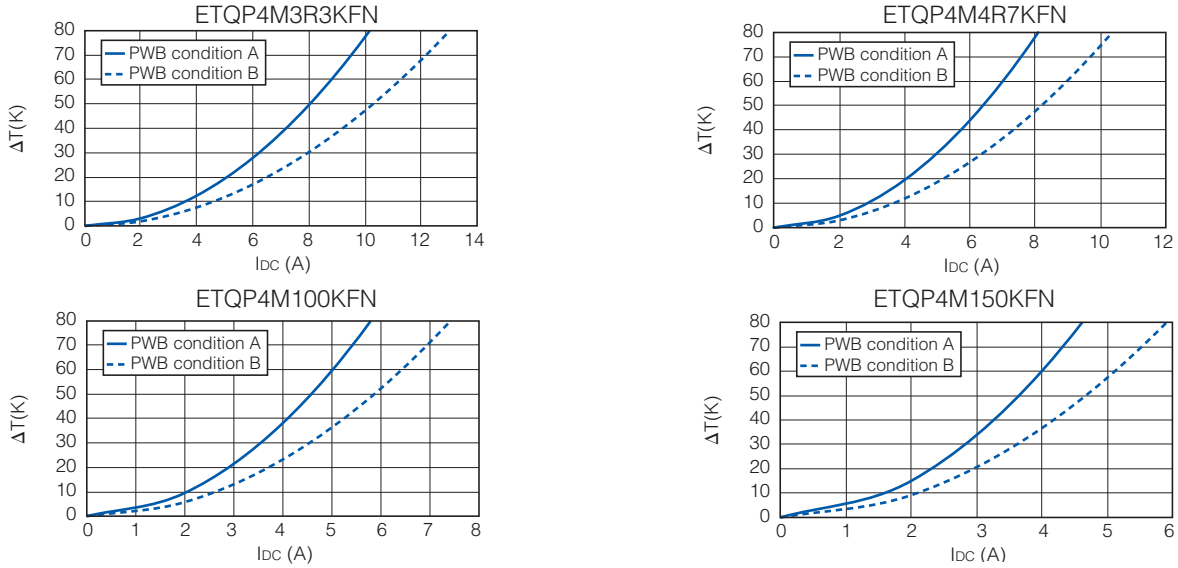

2. Series PCC-M0748M-LE (ETQP4M□□□KFM)


Standard Parts

Series	Part No.	Inductance *1		DCR (at 20 °C) (mΩ)		Rated Current (Typ. : A)		
		L0 (μH)	Tolerance (%)	Typ. (max.)	Tolerance (%)	ΔT=40K (*2)	ΔT=40K (*3)	ΔL=–30% (*4)
PCC-M0748M-LE [7.4×7.0×4.8(mm)]	ETQP4M4R7KFM	4.70	±20	16.80(18.48)	±10	6.5	8.8	10.7
	ETQP4M100KFM	10.00		36.00(39.60)		4.5	6.0	9.6
	ETQP4M220KFM	22.00		84.10(92.51)		2.9	3.9	4.6
	ETQP4M470KFM	47.00		148.60(163.46)		2.2	2.9	3.7

(*1) Measured at 100k Hz.
(*2) DC current which causes temperature rise of 40K. Parts are soldered by reflow on four-layer PWB (1.6 mm FR4) and measured at room temperature. See also (*5)
(*3) DC current which causes temperature rise of 40K. Parts are soldered by reflow on multilayer PWB with high heat dissipation performance. Note: Heat radiation constant are approx. 30 K/W measured on 7.4×7.0×4.8 mm case size. See also (*5)
(*4) Saturation rated current : DC current which causes L(0) drop –30 %.
(*5) Within a suitable application, the part's temperature depends on circuit design and certain heat dissipation conditions. This should be double checked in a worst case operation mode.
In normal case, the max.standard operating temperature of +150 °C should not be exceeded.
For higher operating temperature conditions, please contact Panasonic representative in your area.


Performance Characteristics (Reference)

● Inductance vs DC Current

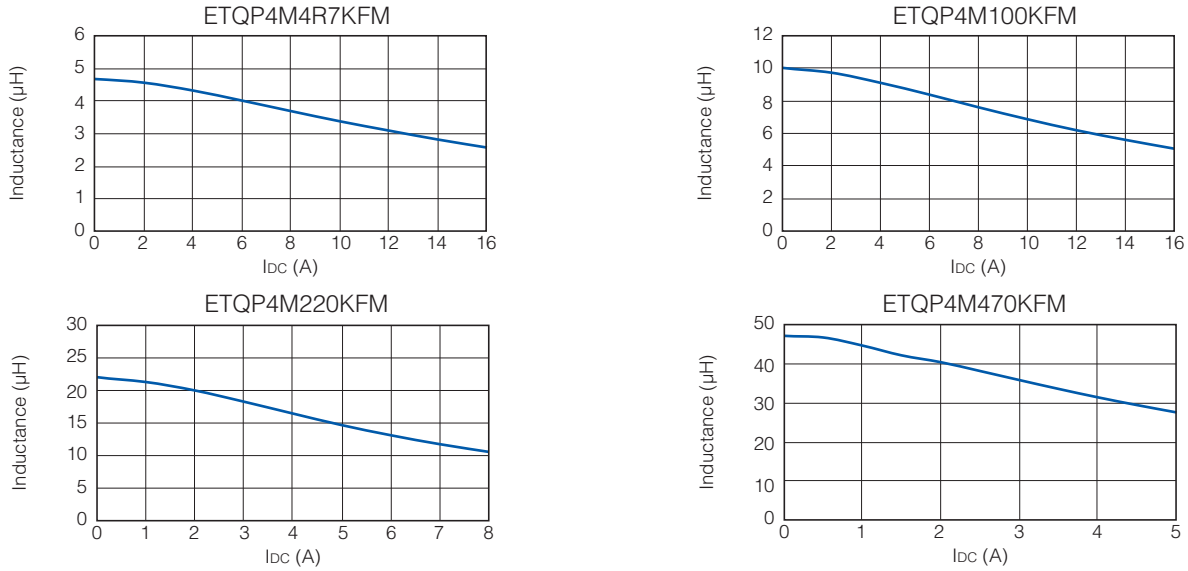

● Case Temperature vs DC Current


PWB condition A : Four-layer PWB (1.6 mm FR4), See also (*2)
PWB condition B : Multilayer PWB with high heat dissipation performance. See also (*3)

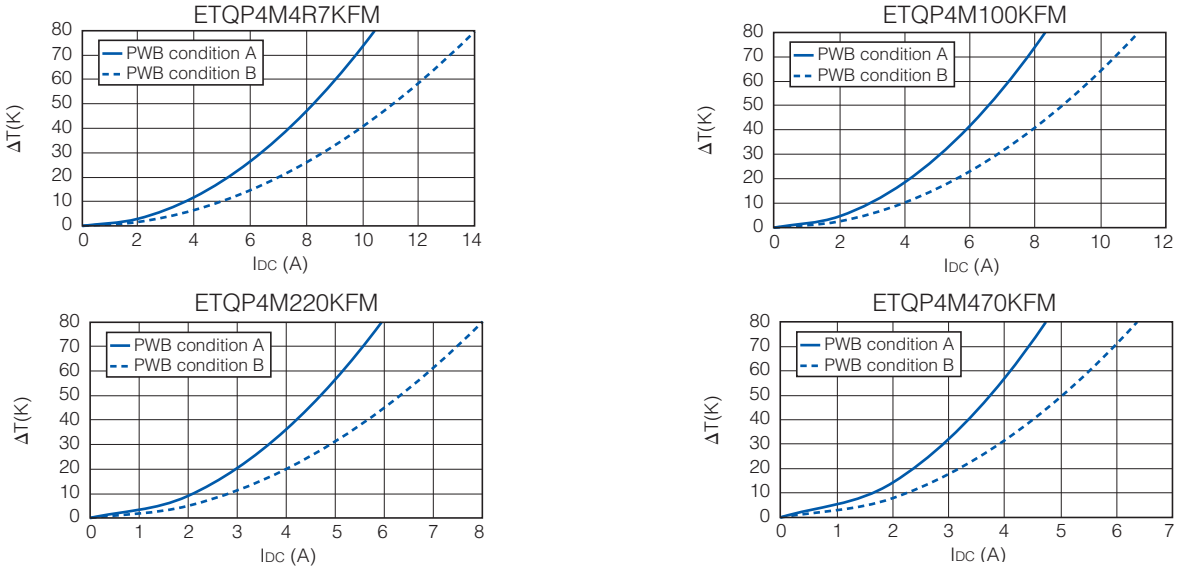


Dimensions in mm (not to scale)

Dimensional tolerance unless noted : ±0.5

Series PCC-M0648M-LE
(ETQP4M□□□KFN)

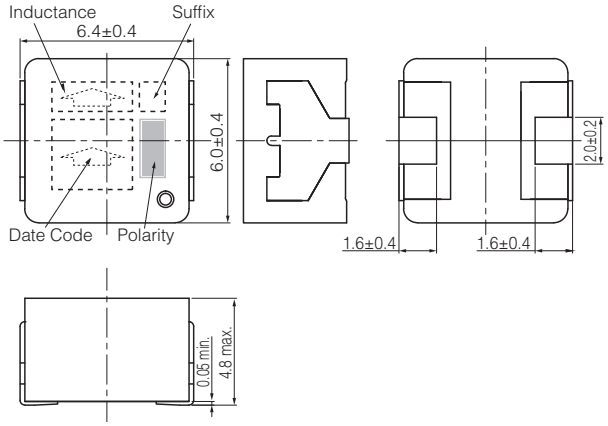


Series PCC-M0748M-LE
(ETQP4M□□□KFM)

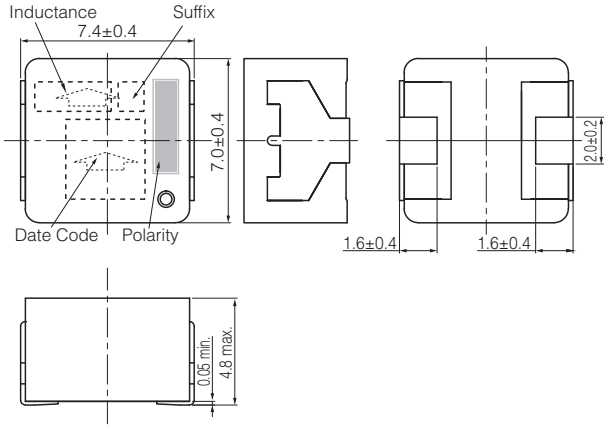

Recommended Land Pattern in mm (not to scale)


Dimensional tolerance unless noted : ±0.5

Series PCC-M0648M-LE
(ETQP4M□□□KFN)

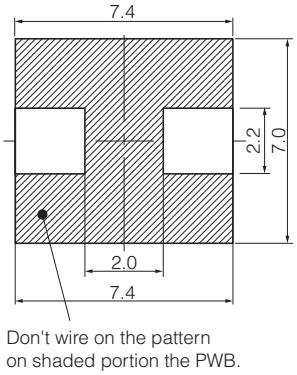

Don't wire on the pattern
on shaded portion the PWB.

Series PCC-M0748M-LE
(ETQP4M□□□KFM)

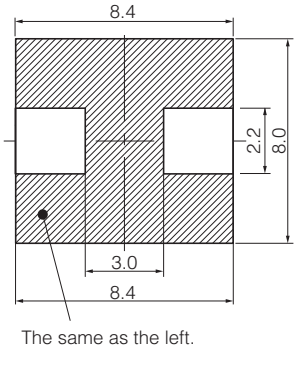


The same as the left.

■ As for Soldering Conditions and Safety Precautions (Power Choke Coils (Automotive Grade)),

Please see Data Files


Packaging Methods (Taping)

● Embossed Carrier Tape Dimensions in mm (not to scale)

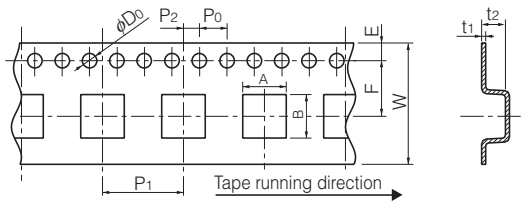


Series	A	B	W	E	F	P_1	P_2	P_0	ϕD_0	t_1	t_2
PCC-M0648M-LE	6.6	7.1	16	1.75	7.5	12	2	4	1.5	0.4	5.0
PCC-M0748M-LE	7.6	8.1	16	1.75	7.5	12	2	4	1.5	0.4	6.0

● Taping Reel Dimensions in mm (not to scale)



Series	A	B	C	D	E	W
PCC-M0648M-LE PCC-M0748M-LE	330	(100)	13	21	2	17.5

Component Placement (Taping)

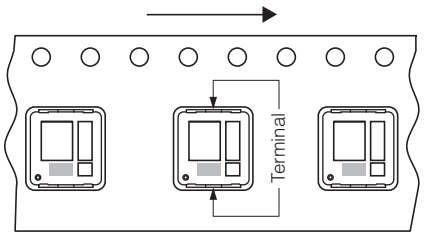

Series M0648M-LE
M0748M-LE

Standard Packing Quantity/Reel

Series	Part No.	Minimum Quantity / Packing Unit	Quantity per reel
PCC-M0648M-LE	ETQP4M□□□KFN	1,000 pcs. / box (2 reel)	500 pcs.
PCC-M0748M-LE	ETQP4M□□□KFM	1,000 pcs. / box (2 reel)	500 pcs.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Power Choke Coil (Automotive Grade)

Series: **PCC-M0530M-H(MC)**
PCC-M0630M-H(MC)



High heat resistance and high reliability
Using metal composite core (MC)

Features

- Reduce core loss in high frequency band (More than 2 MHz)
- High heat resistance : Operation up to 150 °C including self-heating
- Low profile : 3 mm max. height
- SMD type
- High-reliability : High vibration resistance as result of newly developed integral construction; under severe reliability conditions of automotive and other strenuous applications
- High bias current : Excellent inductance stability using ferrous alloy magnetic material
- Temp. stability : Excellent inductance stability over broad temp. range
- Low audible (buzz) noise : New metal composite core technology
- High efficiency : Low R_{DC} of winding and low eddy-current loss of the core
- Shielded construction
- AEC-Q200 Automotive qualified
- RoHS compliant

Recommended Applications

- Noise filter for various drive circuitry requiring high temp. operation and peak current handling capability
- Boost-Converter, Buck-Converter DC/DC

Standard Packing Quantity (Minimum Quantity/Packing Unit)

- 2,000 pcs./box (2 reel)

Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11	12
E	T	Q	P		M				H	F	

Product Code | Classification | Height | Winding | Inductance | Core | Suffix | Size

Inductance: 2R2→ 2.2 µH; 100→ 10 µH

Size: P = □ 5 mm size; N = □ 6 mm size

Temperature rating

Operating temperature range		Tc : –40 °C to +150 °C(Including self-temperature rise)
Storage condition	After PWB mounting	
	Before PWB mounting	Ta : –5 °C to +35 °C 85%RH max.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Standard Parts


Series	Part No.	Inductance *1		DCR (at 20 °C) (mΩ)		Rated Current (Typ. : A)		
		L0 (μH)	Tolerance (%)	Typ. (max.)	Tolerance (%)	ΔT=40K (*2)	ΔT=40K (*3)	ΔL=–30% (*4)
PCC-M0530M-H [5.5×5.0×3.0(mm)]	ETQP3M2R2HFP	2.2	±20	19.5 (21.45)	±20	5.2	6.3	9.0
PCC-M0630M-H [6.5×6.0×3.0(mm)]	ETQP3M100HFN	10.0		68.0 (74.8)		3.0	3.7	5.5
	ETQP3M220HFN	22.0		144.0 (158.4)		2.1	2.5	4.0

(*1) Measured at 100k Hz.
(*2) DC current which causes temperature rise of 40K. Parts are soldered by reflow on four-layer PWB (1.6 mm FR4) and measured at room temperature. See also (*5)
(*3) DC current which causes temperature rise of 40K. Parts are soldered by reflow on multilayer PWB with high heat dissipation performance. Note: Heat radiation constant are approx. 20 K/W measured. See also (*5)
(*4) Saturation rated current : DC current which causes L(0) drop –30 %.
(*5) Within a suitable application, the part's temperature depends on circuit design and certain heat dissipation conditions. This should be double checked in a worst case operation mode.
In normal case, the max.standard operating temperature of +150 °C should not be exceeded.
For higher operating temperature conditions, please contact Panasonic representative in your area.


Performance Characteristics (Reference)

● Inductance vs DC Current


ETQP3M2R2HFP

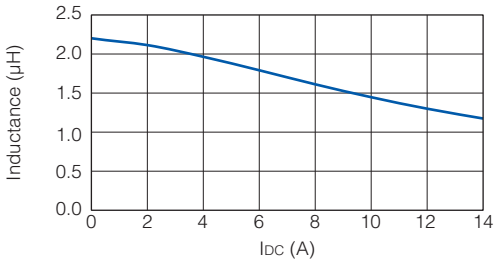

ETQP3M100HFN

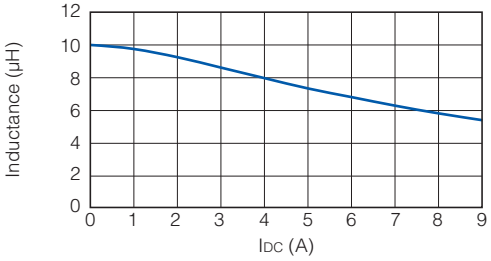


ETQP3M220HFN

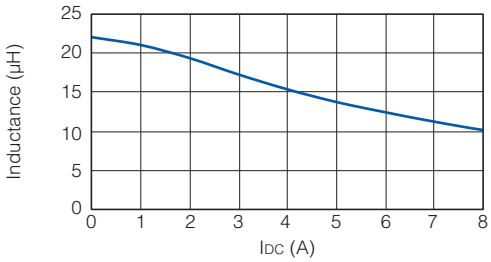


● Case Temperature vs DC Current

PWB condition A : Four-layer PWB (1.6 mm FR4), See also (*2)
PWB condition B : Multilayer PWB with high heat dissipation performance. See also (*3)


ETQP3M2R2HFP

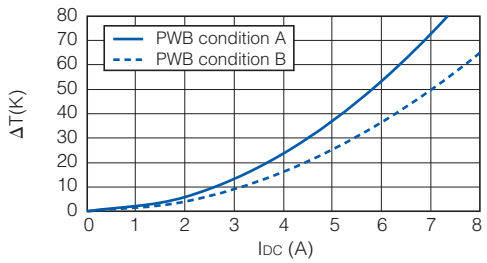

ETQP3M100HFN

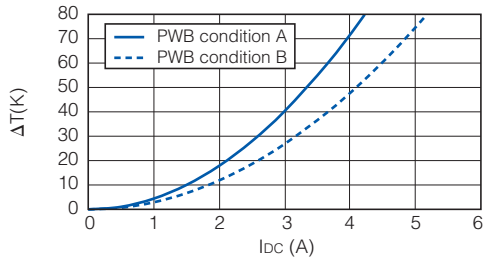


ETQP3M220HFN

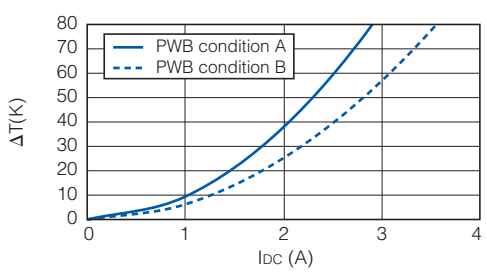


Dimensions in mm (not to scale)

Dimensional tolerance unless noted : ±0.5

Series PCC-M0530M-H
(ETQP3M□□□HFP)

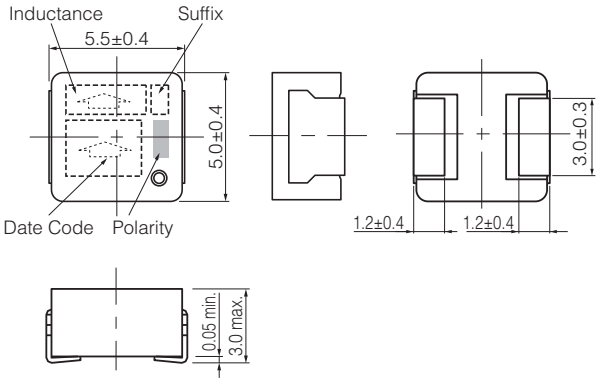


Series PCC-M0630M-H
(ETQP3M□□□HFN)

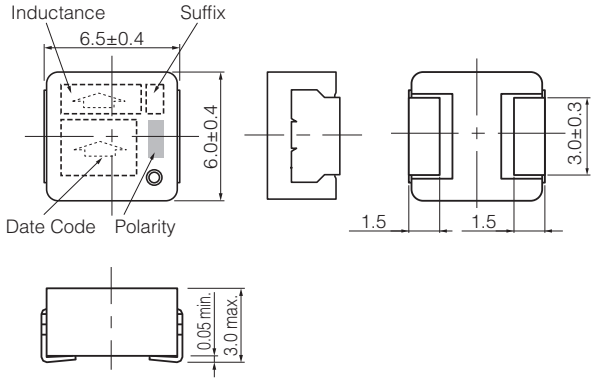

Recommended Land Pattern in mm (not to scale)


Dimensional tolerance unless noted : ±0.5

Series PCC-M0530M-H
(ETQP3M□□□HFP)



Don't wire on the pattern
on shaded portion the PWB.

Series PCC-M0630M-H
(ETQP3M□□□HFN)




The same as the left.

■ As for Soldering Conditions and Safety Precautions (Power Choke Coils (Automotive Grade)),

Please see Data Files


Packaging Methods (Taping)

● Embossed Carrier Tape Dimensions in mm (not to scale)

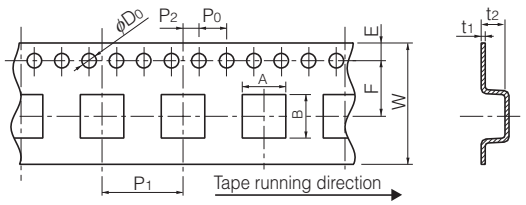


Series	A	B	W	E	F	P_1	P_2	P_0	ϕD_0	t_1	t_2
PCC-M0530M-H	5.6	6.1	16	1.75	7.5	12	2	4	1.5	0.4	3.3
PCC-M0630M-H	7.1	6.6	16	1.75	7.5	12	2	4	1.5	0.4	3.3

● Taping Reel Dimensions in mm (not to scale)



Series	A	B	C	D	E	W
PCC-M0530M-H PCC-M0630M-H	330	(100)	13	21	2	17.5

Component Placement (Taping)

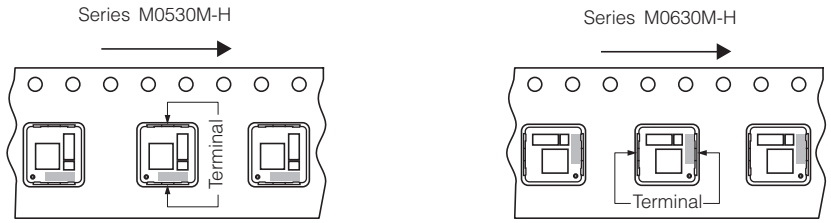


Standard Packing Quantity/Reel

Series	Part No.	Minimum Quantity / Packing Unit	Quantity per reel
PCC-M0530M-H	ETQP3M□□□HFP	2,000 pcs. / box (2 reel)	1,000 pcs.
PCC-M0630M-H	ETQP3M□□□HFN	2,000 pcs. / box (2 reel)	1,000 pcs.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Power Choke Coil (Automotive Grade)

Series : PCC-D1413H (DUST)



Realize high heat resistance, low loss and high reliability
with dust core (DUST)

Industrial Property : patents 5 (Pending)

Features

- High heat resistance : Operation up to 150 °C
- SMD and small package : L×W×T=14.7×13.2×13.1 mm
- High-reliability : High vibration resistance due to newly developed integral construction and severe reliability condition of automotive application is covered
- High bias current : Excellent inductance stability by using ferrous alloy magnetic material
- High Vibration proof : 5 Hz to 2 kHz/30 G
- High efficiency : Achieve by Low loss Dust core and Edgewise coil with rectangular wire
- AEC-Q200 qualified
- RoHS compliant

Recommended Applications

- Driver circuits of fuel injection systems in automotive, driver circuits of diesel common rail injection, step-up power supplies for motor driver-circuits

Standard Packing Quantity

- 600 pcs./10 tray

Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11	12
E	T	Q	P		H				D		
Product Code			Classification	Height	Winding	Inductance			Core	Suffix	Size

Temperature rating

Operating temperature range		Tc : -40 °C to +150 °C(Including self-temperature rise)
Storage condition	After PWB mounting	
	Before PWB mounting	Ta : -5 °C to +35 °C 85%RH max.

Standard Parts

Part No.	Inductance *1		DCR	ACR	Rated Current *3
	L0 at 0A (μH)	L1 at 10A (μH)	at 20 °C (mΩ)	at 20 kHz (mΩ)	△T=40K (A)
ETQPDH240DTV	36.0±30%	(24.0) *2	25.8 typ.	50.0 typ.	6.9


(*1) Measured at 100 kHz.
(*2) Reference Only.
(*3) DC current which causes temperature rise of 40 K. Parts are soldered by reflow on four-layer PWB (1.6 mm FR4) and measured at room temperature.

✻ Within a suitable application, the part's temperature depends on circuit design and certain heat dissipation conditions. This should be double checked in a worst case operation mode.
In normal case, the max. standard operating temperature of +150 °C should not be exceeded.
For higher operating temperature conditions, please contact Panasonic representative in your area.


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Performance Characteristics (Reference)

● Inductance vs DC Current

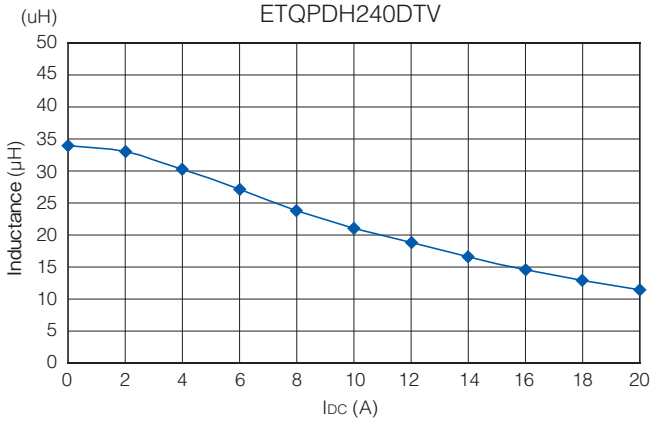


● Case Temperature vs DC Current

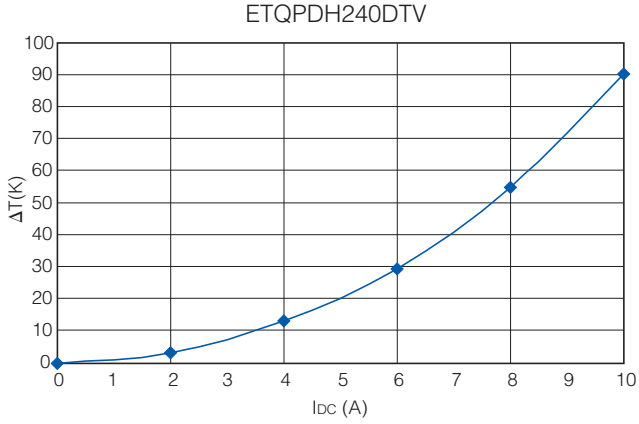


Dimensions in mm (not to scale)

Dimensional tolerance unless noted : ±0.5

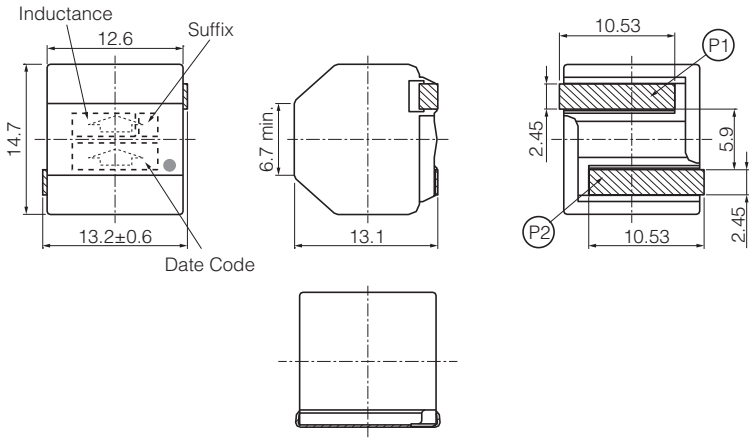


Connection



✻ None polar character

Recommended land patterns in mm (not to scale)

Dimensional tolerance unless noted : ±0.5

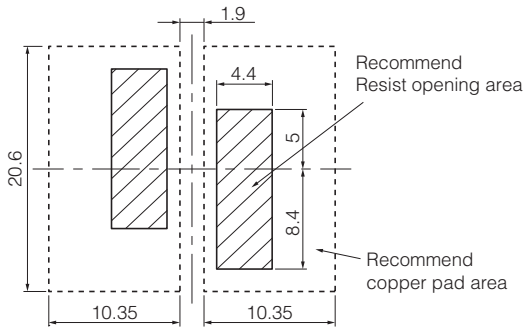


✻ Due to bigger part, Thermal Capacity is large and may occure PWB temperature differences during reflow process.
Recommended land pattern (Heat absorb) should be designed with reflow mountablity.

■ As for Soldering Conditions and Safety Precautions (Common precautions for Power Choke Coils (Automotive Grade)),

Please see Data Files

Packaging Methods (Tray)


● Blister Tray (mm) 60 pcs.

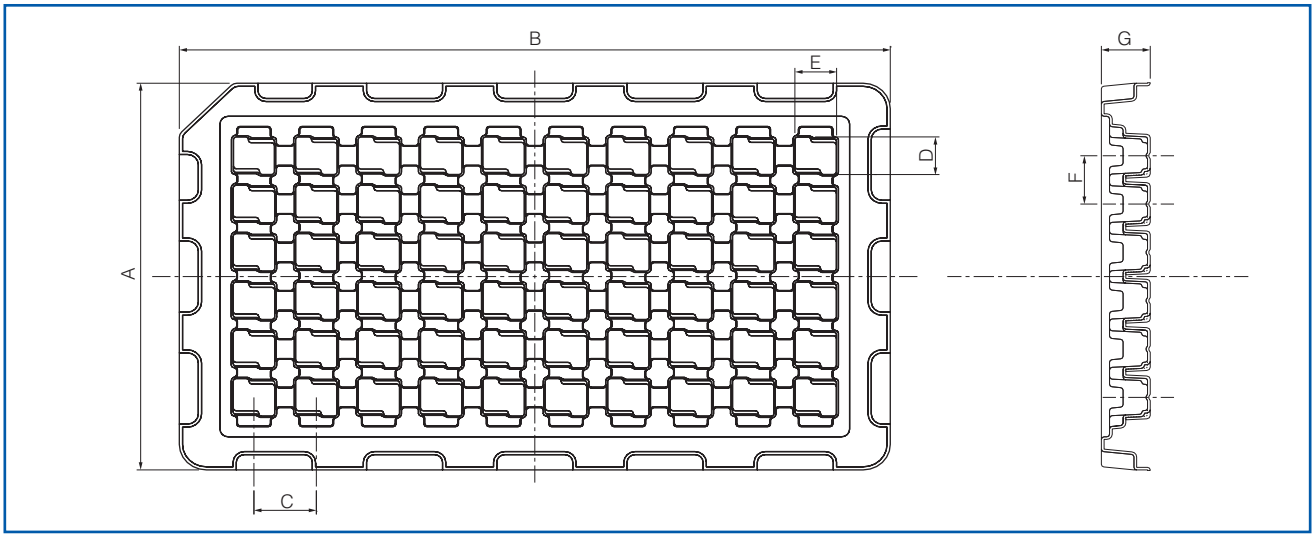

● Blister Tray Dimention

Part No.	A	B	C	D	E	F	G
ETQPDH240DTV	152	262	23	14.8	15.1	19	18

Component Placement (Tray)

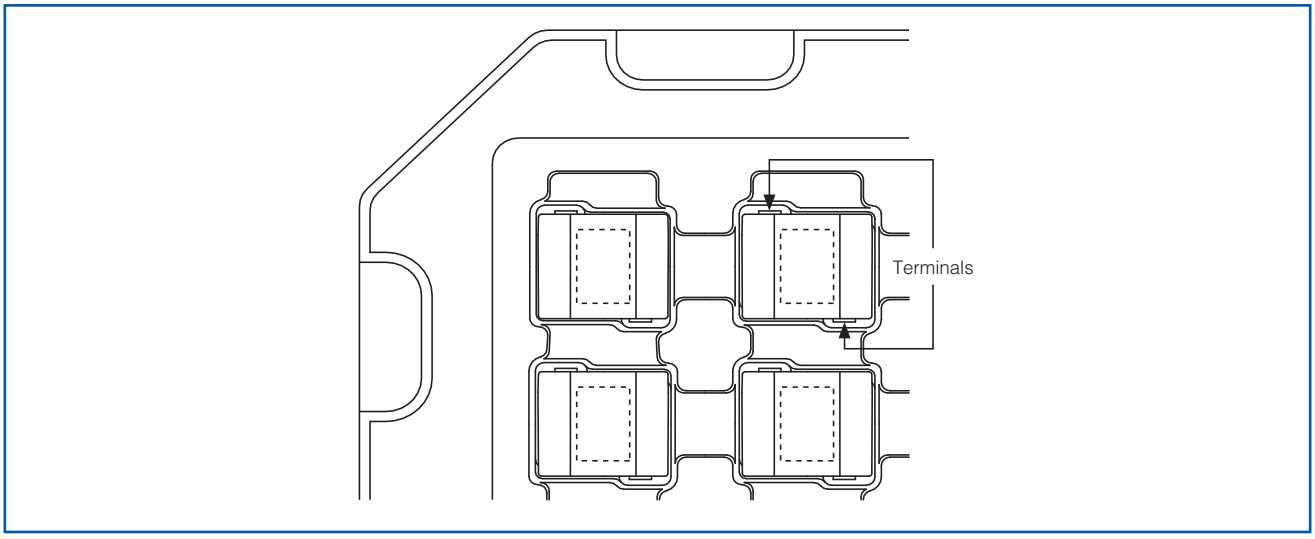


Standard Packing Quantity/Tray

Part No.	Quantity
ETQPDH240DTV	600 pcs. /10 tray (60 pcs. /1 tray)

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Soldering Conditions

Reflow soldering conditions

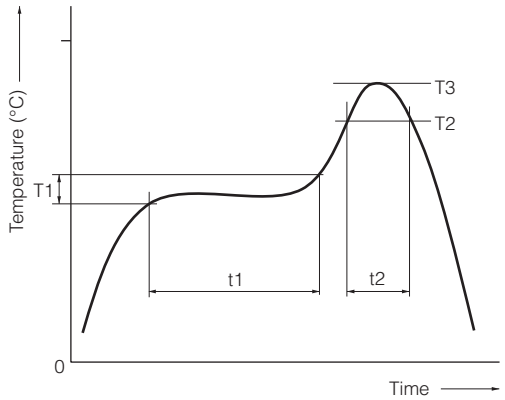

● Pb free solder recommended temperature profile
Power Choke Coils (Automotive Grade)

Series	Preheat		Soldering		Peak Temperature		Time of Reflow
	T1 [°C]	t1 [s]	T2 [°C]	t2 [s]	T3	T3 Limit	
PCC-M0530M/M0540M PCC-M0630M/M0645M PCC-M0754M/M0750M PCC-M0854M/M0850M PCC-M1054M/M1050M PCC-M1050ML/M1060ML PCC-M1050MS PCC-M1280MF PCC-M0530M-LP PCC-M0630M-LP PCC-M0840M-LP PCC-M1040M-LP PCC-M0648M-LE PCC-M0748M-LE PCC-M0530M-H PCC-M0630M-H PCC-D1413H	150 to 170	60 to 120	230 °C	30 to 40	250 °C, 5 s	260 °C, 10 s	2 times max.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

⚠ Safety Precautions
(Common precautions for Power Choke Coils (Automotive Grade) : Series DUST, Series MC)

- When using our products, no matter what sort of equipment they might be used for, be sure to make a written agreement on the specifications with us in advance. The design and specifications in this catalog are subject to change without prior notice.
- Do not use the products beyond the specifications described in this catalog.
- This catalog explains the quality and performance of the products as individual components. Before use, check and evaluate their operations when installed in your products.
- Install the following systems for a failsafe design to ensure safety if these products are to be used in equipment where a defect in these products may cause the loss of human life or other significant damage, such as damage to vehicles (automobile, train, vessel), traffic lights, medical equipment, aerospace equipment, electric heating appliances, combustion/gas equipment, rotating equipment, and disaster/crime prevention equipment.

✻ Systems equipped with a protection circuit and a protection device
✻ Systems equipped with a redundant circuit or other system to prevent an unsafe status in the event of a single fault

⚠ Precautions for use

1. Provision to abnormal condition
This power choke coil itself does not have any protective function in abnormal condition such as overload, short-circuit and open-circuit conditions, etc.
Therefore, it shall be confirmed as the end product that there is no risk of smoking, fire, dielectric withstand voltage, insulation resistance, etc. in abnormal conditions to provide protective devices and/or protection circuit in the end product.

2. Temperature rise
Temperature rise of power choke coil depends on the installation condition in end products. It shall be confirmed in the actual end product that temperature rise of power choke coil is in the limit of specified temperature class.

3. Dielectric strength
Dielectric withstanding test with higher voltage than specific value will damage Insulating material and shorten its life.


4. Water
This Power choke coil must not be used in wet condition by water, coffee or any liquid because insulation strength becomes very low in such condition.

5. Potting
If this power choke coil is potted in some compound, coating material of magnet wire might be occasionally damaged. Please ask us if you intend to pot this power choke coil.


6. Model
When this power choke coil is used in a similar or new product to the original one, it might be unable to satisfy the specifications due to difference of condition of usage.
Please ask us if you use this power choke coil in the manner such as above.

7. Drop
If the power choke coil receives mechanical stress such as drop, characteristics may become poor (due to damage on coil bobbin, etc.). Never use such stressed power choke coil.

8. Printed circuit board design
① Land pattern and Via which exceed Operating Voltage, should not be placed top layer PWB under the products for keeping isolation between inside coil and surface of PWB. **(Series DUST)**
② To the opposing part in this power choke coil bottom please install neither pattern nor the beer, etc. **(Series MC)**



③ Parts arranged around this power choke coil do not touch the surface of this power choke coil (Top side and side). (Series MC)

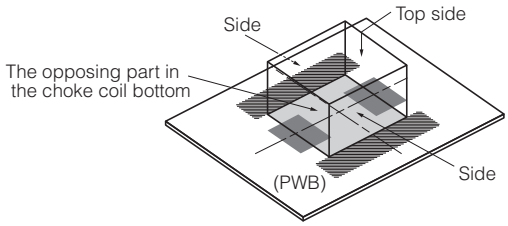

④ This power choke coil is different from the ferrite core-type that installs general concentration GAP.
It has the leakage magnetic bunch distribution of the choke coil to the vertical direction. Please be cautious when using parts and circuit compositions which are easily affected by the leakage flux.

9. Solvent (Series MC)

If this power choke coil is dipped in the cleaning agent, and the coating agent of the toluene and the xylene system, there is a possibility that the performance decreases greatly. Please ask us if you intend to pot this power choke coil.

10. Static electricity measures (Series MC)

① Circuit design
Please set up the ESD measures parts such as capacitors in the former steps of this power choke coil for static electricity when there is a possibility that static electricity is impressed to the choke coil on the circuit.
Moreover, please consult our company about such a case once.

② Treatment with single
Take countermeasures against static electricity when using single power choke coil. (process and equipment)
There is a possibility that the characteristic changes when the voltage of 200 V or more is impressed to this power choke coil. Please handle 200 V or less.

11. Other using emviroment

This power choke coil is not designed for the use in the following, special environment.
Therefore, please do not use it in the following special environment.

- Use in place where a lot of causticity gases such as sea breeze, Cl_2, H_2S, NH_3, SO_2, and No_x exist.
- Use in place where out-of-door exposure and direct sunshine strike.

12. Keeping environment


If this power choke coil is kept under following environment and condition, there is a possibility that the performance and soldering decreases greatly.

- Keep in place where a lot of causticity gases such as sea breeze, Cl_2, H_2S, NH_3, SO_2, and No_x exist.
- Keep in place where out-of-door exposure and direct sunshine strike.

<Package markings>
Package markings include the product number, quantity, and country of origin.
In principle, the country of origin should be indicated in English.

Power Choke Coil

Series : PCC-M0730L (MC)



Small mounting size
for multi-phase DC/DC converter circuits

Features

- Small type (8.7×7.0×H3.0 mm)
- High power (22 A)
- Low loss (R_{DC} :1.12 mΩ)
- Tighter DCR tolerance (±7 %)
- Suitable for high frequency circuit (up to 1 MHz)
- Low buzz noise due to its gap-less structure
- RoHS compliant

Recommended Applications

- Notebook PC power supply modules
- Servers, Routers, DC/DC converters for driving CPUs

Standard Packing Quantity (Minimum Quantity/Packing Unit)

- 3,000 pcs./box (2 reel)

Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11	12
E	T	Q	P	3	L						
Product Code			Classification	Size	Winding	Inductance			Core	Packaging	Suffix

Standard Parts


Part No.	Inductance (at 20 °C)*1			Rated current (A)*2	Rated current (ref) (A)*3	DC resistance (at 20 °C) (mΩ)
	L0 at 0A	L1*4				
	(μH)	(μH)	Measurement current (A)			
ETQP3LR24CFM	0.24±20 %	(0.19)	22	22	35	1.12±7 %

(∗1) Inductance is measured at 1.0 MHz.
(∗2) Rated current defines actual value of DC current, when temperature rise of coil becomes 40 K. (Method A)
(∗3) Rated current defines actual value of DC current, when temperature rise of coil becomes 40 K. (Method B)
(∗4) Reference only
(∗5) Method A (PANASONIC's standard measurement conditions),
Method B (high heat dissipation measurement) is different from Method A by the measurement methods.
In normal application condition, the part's temperature depends on circuit design and heat dissipation condition.
This condition shall be verified by the worst operational condition.


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Performance Characteristics (Reference)


Inductance vs DC Current

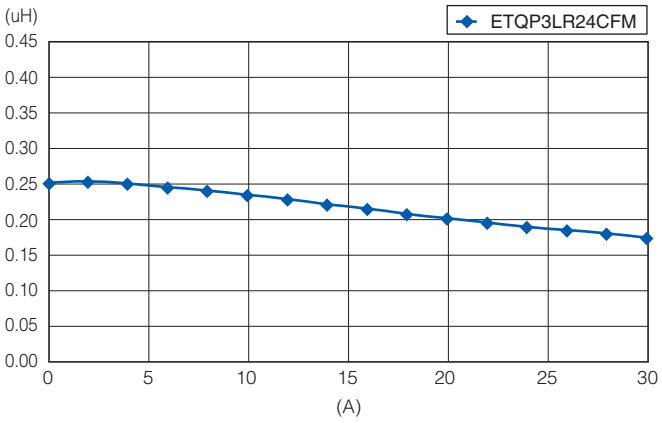


Case Temperature vs DC Current (Method A)

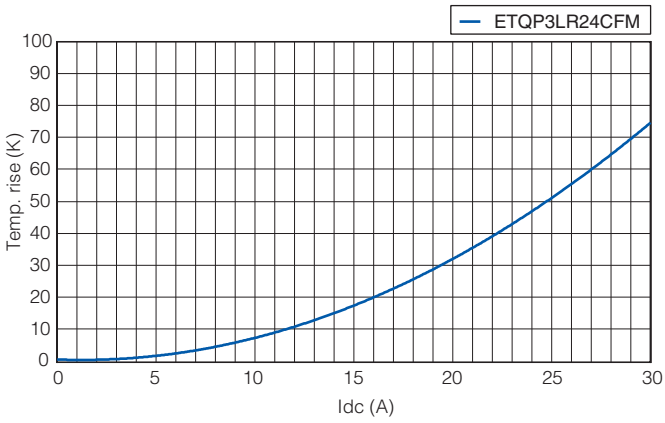


Dimensions in mm (not to scale)

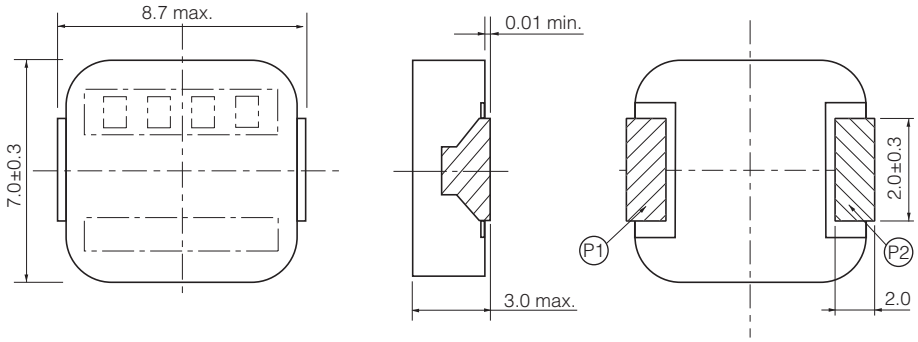

Connection



Recommended land patterns in mm (not to scale)



■ As for Packaging Methods, Soldering Conditions and Safety Precautions (Power Choke Coils for Consumer use),

Please see Data Files

Power Choke Coil

Series : PCC-M0740L (MC) Low DCR Type



Small mounting size
for multi-phase DC/DC converter circuits

Features

- Small type (8.7×7.0×H4.0 mm)
- High power (17 A to 24 A)
- Low loss (R_{DC} :1.0 to 1.5 mΩ)
- Tighter DCR tolerance (±7 %)
- Suitable for high frequency circuit (up to 1 MHz)
- Low buzz noise due to its gap-less structure
- RoHS compliant

Recommended Applications

- Notebook PC power supply modules
- Servers, Routers, DC/DC converters for driving CPUs

Standard Packing Quantity (Minimum Quantity/Packing Unit)

- 3,000 pcs./box (2 reel)

Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11	12
E	T	Q	P	4	L						
Product Code			Classification	Size	Winding	Inductance			Core	Packaging	Suffix

Standard Parts


Part No.	Inductance (at 20 °C)*1			Rated current (A)*2	Rated current (ref) (A)*3	DC resistance (at 20 °C) (mΩ)
	L0 at 0A	L1*4				
	(μH)	(μH)	Measurement current (A)			
ETQP4LR24AFM	0.24±20 %	(0.20)	24	24	35.5	1.00±7 %
ETQP4LR36AFM	0.36±20 %	(0.30)	20	20	31.0	1.35±7 %
ETQP4LR42AFM	0.42±20 %	(0.35)	17	17	28.5	1.50±7 %

(∗1) Inductance is measured at 1.0 MHz.
(∗2) Rated current defines actual value of DC current, when temperature rise of coil becomes 40 K. (Method A)
(∗3) Rated current defines actual value of DC current, when temperature rise of coil becomes 40 K. (Method B)
(∗4) Reference only
(∗5) Method A (PANASONIC's standard measurement conditions),
Method B (high heat dissipation measurement) is different from Method A by the measurement methods.
In normal application condition, the part's temperature depends on circuit design and heat dissipation condition. This condition shall be verified by the worst operational condition.


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Performance Characteristics (Reference)


Inductance vs DC Current

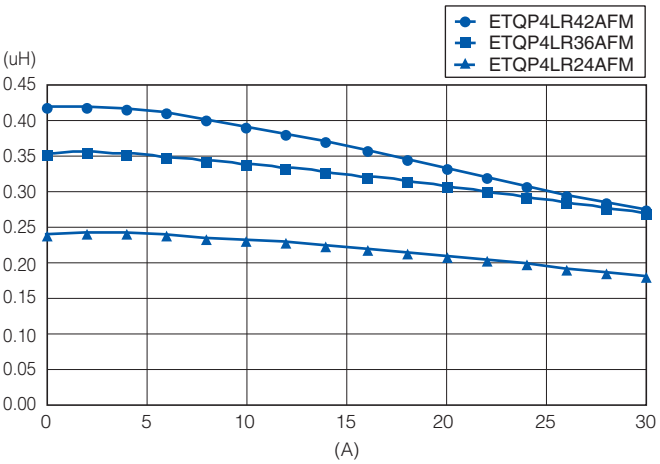

Case Temperature vs DC Current (Method A)

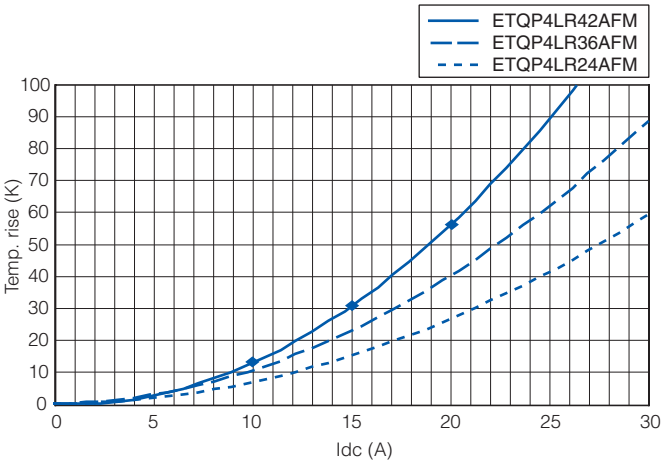


Dimensions in mm (not to scale)

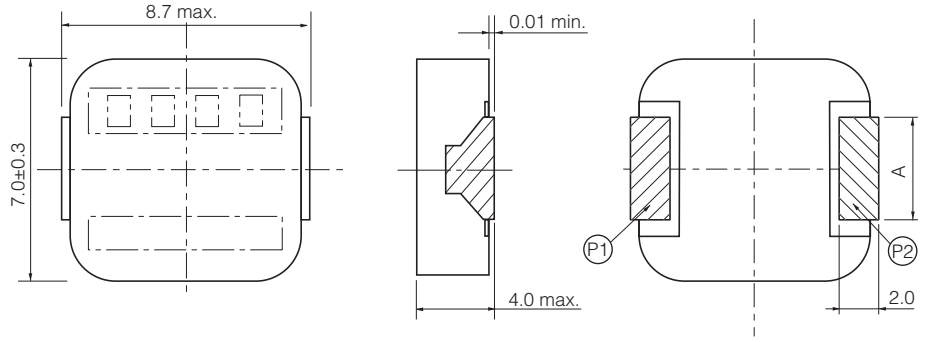


Part No.	A
ETQP4LR24AFM	3.0±0.3
ETQP4LR36AFM	2.0±0.3
ETQP4LR42AFM	

Connection



Recommended land patterns in mm (not to scale)



Part No.	B
ETQP4LR24AFM	3.6
ETQP4LR36AFM	2.6
ETQP4LR42AFM	

■ **As for Packaging Methods, Soldering Conditions and Safety Precautions (Power Choke Coils for Consumer use),**
Please see Data Files

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Power Choke Coil

Series : PCC-M1040L (MC)



Small mounting size
for multi-phase DC/DC converter circuits

Features

- Small type (11.5×10.0×H4.0 mm)
- High power (21 A to 28 A)
- Low loss (R_{DC} :0.7 to 1.56 mΩ)
- Tighter DCR tolerance (±5 % to ±10 %)
- Suitable for high frequency circuit (up to 1 MHz)
- Low buzz noise due to its gap-less structure
- RoHS compliant

Recommended Applications

- Servers, Routers, DC/DC converters for driving CPUs
- Notebook PC power supply modules

Standard Packing Quantity (Minimum Quantity/Packing Unit)

- 2,000 pcs./box (2 reel) : ETQP4LR36WFC, ETQP4LR56WFC, ETQP4LR45XFC
- 1,000 pcs./box (2 reel) : ETQP4LR19WFC

Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11	12
E	T	Q	P	4	L						
Product Code			Classification	Size	Winding	Inductance			Core	Packaging	Suffix

Standard Parts


Part No.	Inductance (at 20 °C)*1					Rated current (A)*2	Rated current (ref) (A)*3	DC resistance (at 20 °C) (mΩ)
	L0 at 0A	L1		L2 (Reference)*4				
	(μH)	(μH)	Measurement current (A)	(μH)	Measurement current (A)			
ETQP4LR19WFC	(0.20)	0.19±20 %	21	(0.17)	30	28	38	0.70±10 %
ETQP4LR36WFC	(0.37)	0.36±20 %	17	(0.34)	24	24	33	1.10± 5 %
ETQP4LR56WFC	(0.60)	0.56±20 %	15	(0.53)	21	21	28	1.56± 5 %
ETQP4LR45XFC	$0.45^{+20\%}_{-25\%}$	—	—	(0.38)	25	25	33	1.10± 5 %

(∗1) Inductance is measured at 100 kHz.
(∗2) Rated current defines actual value of DC current, when temperature rise of coil becomes 40 K. (Method A)
(∗3) Rated current defines actual value of DC current, when temperature rise of coil becomes 40 K. (Method B)
(∗4) Reference only
(∗5) Method A (PANASONIC's standard measurement conditions),
Method B (high heat dissipation measurement) is different from Method A by the measurement methods.
In normal application condition, the part's temperature depends on circuit design and heat dissipation condition. This condition shall be verified by the worst operational condition.


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Performance Characteristics (Reference)


Inductance vs DC Current

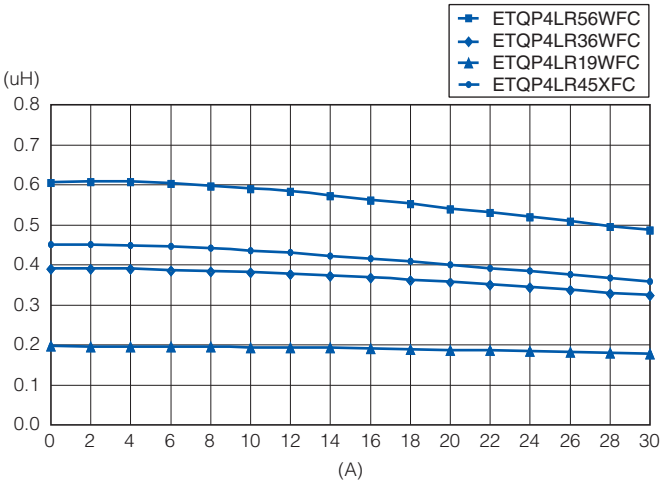


Case Temperature vs DC Current (Method A)

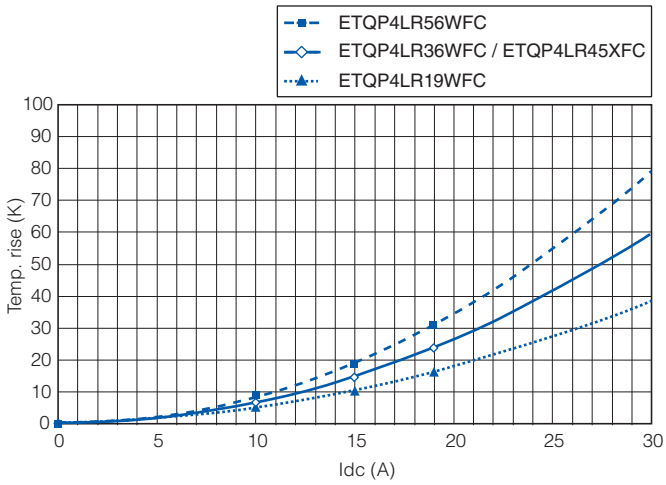


Dimensions in mm (not to scale)

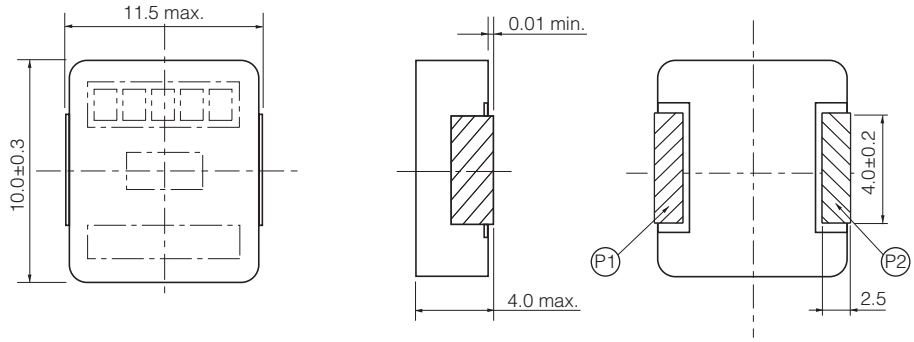

Connection



Recommended land patterns in mm (not to scale)



■ As for Packaging Methods, Soldering Conditions and Safety Precautions (Power Choke Coils for Consumer use),

Please see Data Files

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Power Choke Coil

Series : PCC-M1040L (MC) Low DCR Type



Small mounting size
for multi-phase DC/DC converter circuits

Features

- Small type (11.7×10.0×H4.0 mm)
- High power (21 A to 30 A)
- Low loss (R_{DC} :0.76 to 1.58 mΩ)
- Tighter DCR tolerance (±5 %)
- Suitable for high frequency circuit (up to 1 MHz)
- Low buzz noise due to its gap-less structure
- Shielded construction
- RoHS compliant

Recommended Applications

- Notebook PC power supply modules
- Servers, Routers, DC/DC converters for driving CPUs

Standard Packing Quantity (Minimum Quantity/Packing Unit)

- 2,000 pcs./box (2 reel)

Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11	12
E	T	Q	P	4	L						
Product Code			Classification	Size	Winding	Inductance			Core	Packaging	Suffix

Standard Parts


Part No.	Inductance (at 20 °C)*1			Rated current (A)*2	Rated current (ref) (A)*3	DC resistance (at 20 °C) (mΩ)
	L0 at 0A	L1*4				
	(μH)	(μH)	Measurement current (A)			
ETQP4LR36AFC	0.36±20 %	(0.29)	30	30	40	0.76±5 %
ETQP4LR68XFC	0.68±20 %	(0.59)	21	21	28	1.58±5 %

(∗1) Inductance is measured at 1.0 MHz.
(∗2) Rated current defines actual value of DC current, when temperature rise of coil becomes 40 K. (Method A)
(∗3) Rated current defines actual value of DC current, when temperature rise of coil becomes 40 K. (Method B)
(∗4) Reference only
(∗5) Method A (PANASONIC's standard measurement conditions),
Method B (high heat dissipation measurement) is different from Method A by the measurement methods.
In normal application condition, the part's temperature depends on circuit design and heat dissipation condition. This condition shall be verified by the worst operational condition.


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Performance Characteristics (Reference)


Inductance vs DC Current

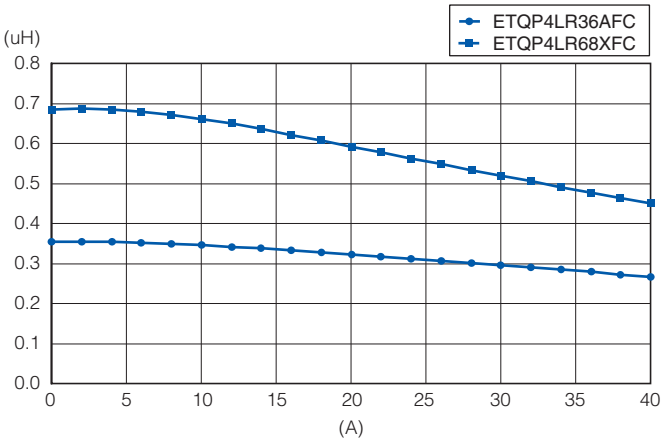


Case Temperature vs DC Current (Method A)

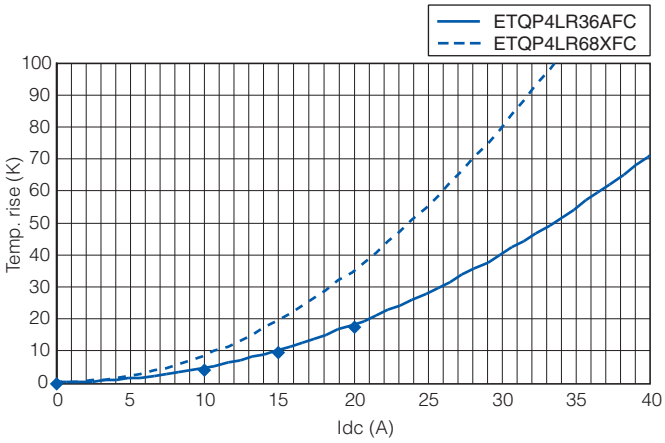


Dimensions in mm (not to scale)

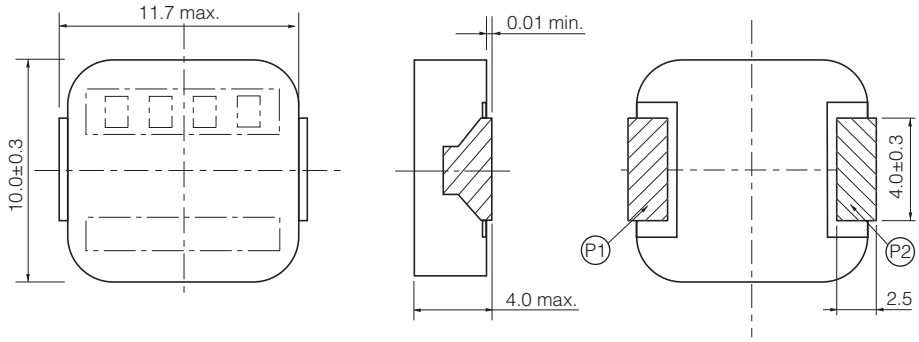

Connection



Recommended land patterns in mm (not to scale)



■ As for Packaging Methods, Soldering Conditions and Safety Precautions (Power Choke Coils for Consumer use),

Please see Data Files

Power Choke Coil

Series : PCC-M1250L (MC)



High power, Low loss, Low-profile

Features

- High power (25 A to 30 A)
- Low loss (R_{DC} :0.8 to 1.1 mΩ)
- Narrow R_{DC} tolerance (±5 % to ±7 %)
- Low profile (14.5×12.5×H5.0 mm)
- High frequency (up to 1 MHz)
- Low buzz noise due to its gap-less structure
- RoHS compliant

Recommended Applications

- Servers, Routers, DC/DC converters for driving CPUs
- Notebook PC power supply modules

Standard Packing Quantity (Minimum Quantity/Packing Unit)

- 1,000 pcs./box (2 reel)

Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11	12
E	T	Q	P	5	L						
Product Code			Classification	Size	Winding	Inductance			Core	Packaging	Suffix

Standard Parts


Part No.	Inductance (at 20 °C)*1				Rated current (A)*2	DC resistance (at 20 °C) (mΩ)
	L1		L2 (Reference)			
	(μH)	Measurement current (A)	(μH)	Measurement current (A)		
ETQP5LR50XFA	0.50±20 %	30	(0.46)	42	30	0.80±7 %
ETQP5LR60XFA	0.60±20 %	30	(0.54)	42	27	1.10±5 %

(*1) Inductance is measured at 100 kHz.
(*2) Rated current defines actual value of DC current, when temperature rise of coil becomes 40 K.


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Performance Characteristics (Reference)


Inductance vs DC Current

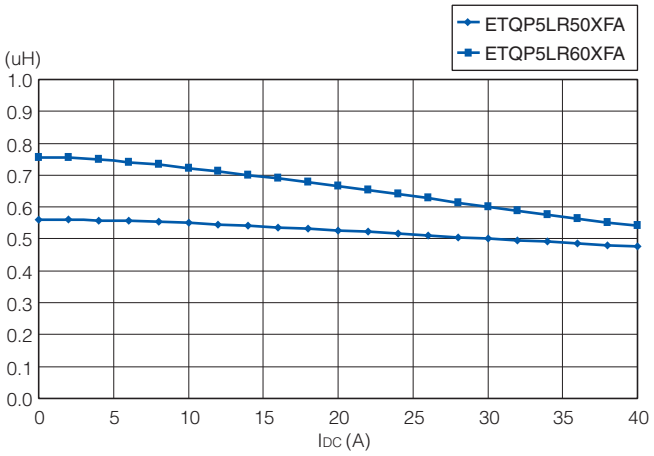


Case Temperature vs DC Current

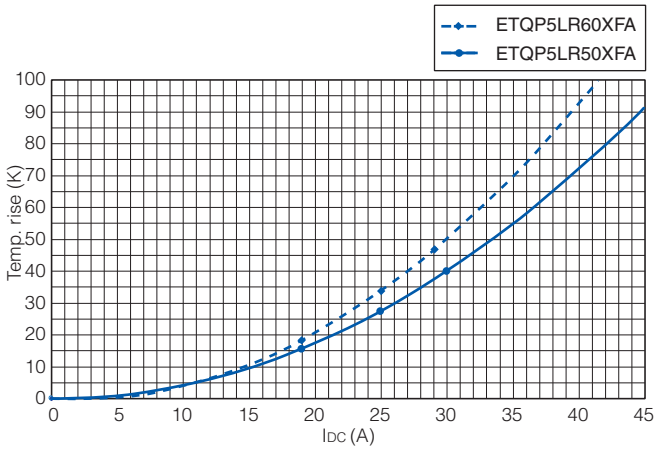


Dimensions in mm (not to scale)

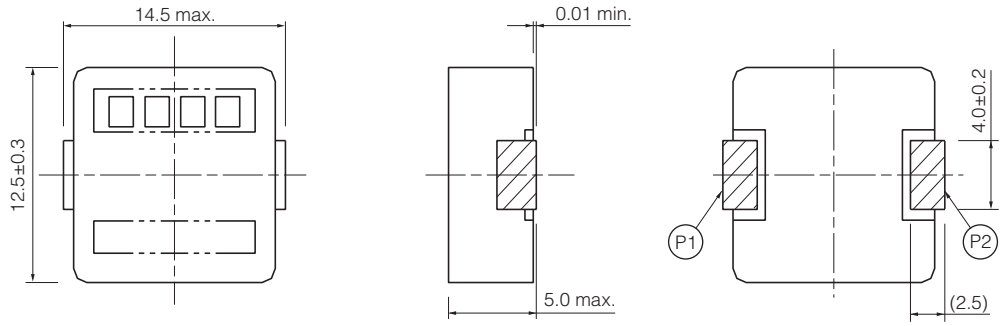

Connection




Recommended land patterns in mm (not to scale)

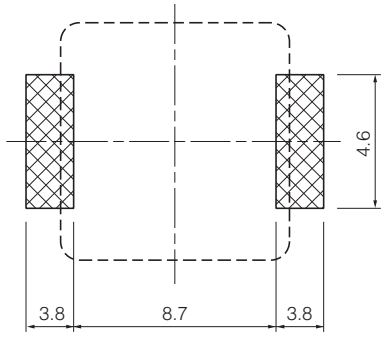

■ **As for Packaging Methods, Soldering Conditions and Safety Precautions (Power Choke Coils for Consumer use),**
Please see Data Files

Packaging Methods (Taping)


● Embossed Carrier Tape Dimensions in mm (not to scale)

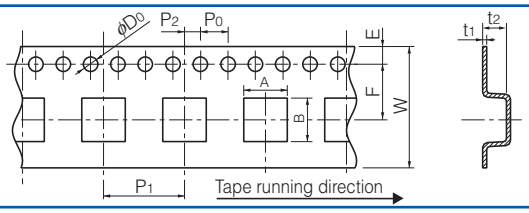

Power Choke Coils for consumer use

Series	A	B	W	E	F	P1	P2	P0	φD0	t1	t2
PCC-M0730L	7.6	8.9	16.0	1.75	7.5	12.0	2.0	4.0	1.5	0.4	4.2
PCC-M0740L	7.6	8.9									4.3
PCC-M1040L	10.6	11.8	24.0		11.5	16.0					5.2
PCC-M1250L	13.1	14.8									5.3

● Taping Reel Dimensions in mm (not to scale)




Power Choke Coils for consumer use

Series	A	B	C	D	E	W
PCC-M0730L/M0740L	380	80	13	21	2	17.5
PCC-M1040L						25.4
PCC-M1250L						

Standard Packing Quantity/Reel

● Power Choke Coils for consumer use



Standard Packing Quantity/Reel


● Power Choke Coils for consumer use

Series	Part No.	Minimum Quantity / Packing Unit	Quantity per reel
PCC-M0730L	ETQP3L□□□CFM	3,000 pcs. / box (2 reel)	1,500 pcs.
PCC-M0740L	ETQP4L□□□AFM		
PCC-M1040L	ETQP4L□□□WFC ETQP4L□□□XFC ETQP4L□□□AFC	2,000 pcs. / box (2 reel)	1,000 pcs.
PCC-M1040L	ETQP4LR19WFC	1,000 pcs. / box (2 reel)	500 pcs.
PCC-M1250L	ETQP5L□□□XFA		

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Soldering Conditions

Reflow soldering conditions

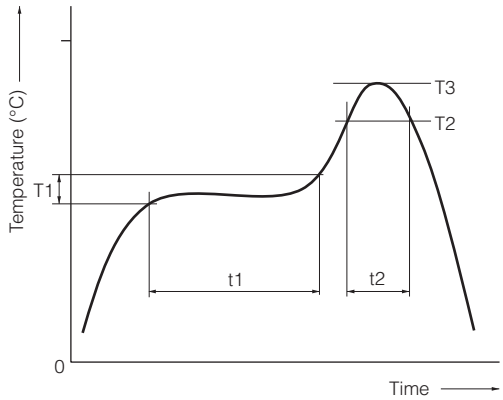

● Pb free solder recommended temperature profile
Power Choke Coils for consumer use

Series	Preheat		Soldering		Peak Temperature		Time of Reflow
	T1 [°C]	t1 [s]	T2 [°C]	t2 [s]	T3	T3 Limit	
PCC-M0730L PCC-M0740L PCC-M1040L PCC-M1250L	150 to 170	60 to 120	230 °C	30 to 40	250 °C, 5 s	260 °C, 10 s	2 times max.

⚠ Safety Precautions
(Common precautions for Power Choke Coils for consumer use)

- When using our products, no matter what sort of equipment they might be used for, be sure to make a written agreement on the specifications with us in advance. The design and specifications in this catalog are subject to change without prior notice.
- Do not use the products beyond the specifications described in this catalog.
- This catalog explains the quality and performance of the products as individual components. Before use, check and evaluate their operations when installed in your products.
- Install the following systems for a failsafe design to ensure safety if these products are to be used in equipment where a defect in these products may cause the loss of human life or other significant damage, such as damage to vehicles (automobile, train, vessel), traffic lights, medical equipment, aerospace equipment, electric heating appliances, combustion/gas equipment, rotating equipment, and disaster/crime prevention equipment.

✻ Systems equipped with a protection circuit and a protection device
✻ Systems equipped with a redundant circuit or other system to prevent an unsafe status in the event of a single fault

⚠ Precautions for use

1. Provision to abnormal condition
This power choke coil itself does not have any protective function in abnormal condition such as overload, short-circuit and open-circuit conditions, etc.
Therefore, it shall be confirmed as the end product that there is no risk of smoking, fire, dielectric withstand voltage, insulation resistance, etc. in abnormal conditions to provide protective devices and/or protection circuit in the end product.

2. Temperature rise
Temperature rise of power choke coil depends on the installation condition in end products. It shall be confirmed in the actual end product that temperature rise of power choke coil is in the limit of specified temperature class.

3. Dielectric strength
Dielectric withstanding test with higher voltage than specific value will damage Insulating material and shorten its life.

4. Water
This Power choke coil must not be used in wet condition by water, coffee or any liquid because insulation strength becomes very low in such condition.

5. Potting
If this power choke coil is potted in some compound, coating material of magnet wire might be occasionally damaged. Please ask us if you intend to pot this power choke coil.

6. Detergent
Please consult our company when using detergent for the power choke coil as reliability confirmation etc., is necessary.

7. Storage temperature
-5 °C to +35 °C

8. Operating temperature
Minimum temperature : -40 °C (Ambient temperature of the power choke coil)
Maximum temperature : 130 °C (Ambient temperature of the power choke coil plus the temperature rise)
100 °C (Only series : PCC-F126F(N6))

9. Model
When this power choke coil is used in a similar or new product to the original one, it might be unable to satisfy the specifications due to difference of condition of usage.
Please ask us if you use this power choke coil in the manner such as above.

10. Drop
If the power choke coil receives mechanical stress such as drop, characteristics may become poor (due to damage on coil bobbin, etc.). Never use such stressed power choke coil.

<Package markings>
Package markings include the product number, quantity, and country of origin.
In principle, the country of origin should be indicated in English.

Power Inductors /Wire Wound type · Selection Guide

No.	Dimensions (mm) External dimension (typ.)	Dimensions (mm) Height (max.)	Type	Appearance Magnetic shielded structure	Inductance [L] (μH)	Rated Current I dc (A)
1	3.0	1.0	ELLVEG		0.68 μH – 22 μH	0.33 to 1.80
2		1.2	ELLVFG-C		33 μH	0.28 to 1.50
3		1.5	ELLVGG		47 μH	0.27 to 1.80
4		1.5	ELLVGG-C		100 μH	0.18 to 1.40
5	3.8	1.2	ELL4FG-A		47 μH	0.29 to 1.90
6		1.4	ELL4GG		1.2 μH – 100 μH	0.25 to 1.90
7		1.8	ELL4LG-A		150 μH	0.22 to 1.90
8	6.0	1.6	ELL6GG		100 μH	0.30 to 2.50
9		2.0	ELL6PG		0.8 μH – 100 μH	0.38 to 2.80
10	6.0 × 6.4	2.8	ELL6RH		220 μH	0.20 to 3.00
11		3.3	ELL6SH		680 μH	0.16 to 3.40
12		5.0	ELL6UH		10 μH – 1000 μH	0.18 to 1.80
13	8.0	5.0	ELL8TP		0.8 μH – 1000 μH	0.25 to 9.00
14	10.0	4.5	ELLATP		1000 μH	0.31 to 8.00
15	12.0	4.5	ELLCTP		1.2 μH – 1000 μH	0.40 to 7.00

✻ Please see the pages of each product for details of the electrical characteristics.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Power Inductors / Wire Wound type

Series : **G**
Type : **ELLVEG**
ELLVFG-C
ELLVGG
ELLVGG-C



Type ELLVEG Type ELLVFG Type ELLVGG Type ELLVGG-C

Features

- Magnetic shielded structure
- Low DC resistance and large current capability
- Shock resistant
- RoHS compliant

Recommended Applications

- DSC, Tablet terminal, Portable game device, DC/DC converter circuit for cellular phone

Standard Packing Quantity

- 2,000 pcs./reel

■ As for Soldering Conditions and Safety Precautions,

Please see Data Files

Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11
E	L	L	V	G	G	1	0	0	M	
Product Code			Outer size	Height	Structure	Inductance			Tolerance	Design No.

ELL	Choke Coil (Magnetic shielded type)


E	1.0 max.
F	1.2 max.
G	1.5 max.

G	Series

2R2 → 2.2 µH
150 → 15 µH


M → ±20 %
N → ±30 %

Dimensions in mm (not to scale)

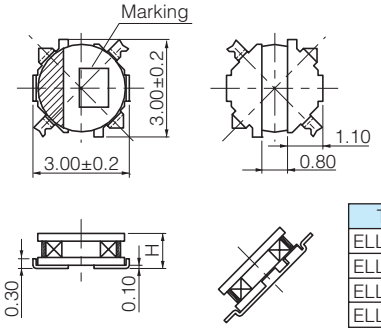

Type	H
ELLVEG	1.0 max.
ELLVFG-C	1.2 max.
ELLVGG	1.5 max.
ELLVGG-C	1.5 max.

Recommended land patterns in mm (not to scale)




Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.


Standard Parts

Series	Part No.	Inductance (100 kHz)		R_{DC} (at 20 °C)		Saturation Rated Current*1 (mA max.)	Temperature Rise Current*2 (mA max.)	Marking
		(μH)	Tol.	(mΩ)	Tol.			
Series VEG	ELLVEGR68N	0.68	±30 %	50	±20 %	1950	1800	7
	ELLVEG1R0N	1.0		61		1900	1600	A
	ELLVEG1R5N	1.5		74		1200	1400	C
	ELLVEG2R2N	2.2		110		1100	1250	D
	ELLVEG3R3N	3.3		210		1000	820	E
	ELLVEG4R7N	4.7		240		750	770	H
	ELLVEG6R8N	6.8		350		580	650	K
	ELLVEG100M	10.0	±20 %	480		520	600	M
	ELLVEG150M	15.0		710		430	490	O
	ELLVEG220M	22.0		1200		330	400	R
Series VFG-C	ELLVFG1R0NC	1.0	±30 %	50		1500	1700	a
	ELLVFG1R5NC	1.5		61		1300	1550	c
	ELLVFG2R2NC	2.2		87		1100	1400	d
	ELLVFG3R3NC	3.3		110		980	1250	e
	ELLVFG4R7NC	4.7		150		740	1050	h
	ELLVFG6R8NC	6.8		230		600	840	k
	ELLVFG100MC	10.0	±20 %	380		550	640	m
	ELLVFG150MC	15.0		540		500	480	o
	ELLVFG220MC	22.0		710		350	430	r
	ELLVFG330MC	33.0		1160		280	330	t
Series VGG	ELLVGG1R0N	1.0	±30 %	52		2200	1800	A
	ELLVGG1R2N	1.2		61		2000	1600	B
	ELLVGG1R6N	1.6		73		1800	1550	C
	ELLVGG2R2N	2.2		92		1600	1400	D
	ELLVGG3R3N	3.3		130		1350	1100	E
	ELLVGG3R9N	3.9		150		1300	1000	F
	ELLVGG4R7N	4.7		170		1200	980	H
	ELLVGG6R8N	6.8		230		1000	800	K
	ELLVGG100M	10.0	±20 %	280		800	730	M
	ELLVGG120M	12.0		480		690	580	N
	ELLVGG150M	15.0		640		600	490	O
	ELLVGG220M	22.0		800		500	460	R
	ELLVGG330M	33.0		1330		450	340	T
	ELLVGG470M	47.0		2100		350	270	V
Series VGG-C	ELLVGG1R0NC	1.0	±30 %	47		1400	2000	A
	ELLVGG2R2NC	2.2		79		1050	1500	D
	ELLVGG3R3NC	3.3		110		1000	1300	E
	ELLVGG4R7NC	4.7		130		900	1200	H
	ELLVGG6R8NC	6.8		180		700	1000	K
	ELLVGG100MC	10.0	±20 %	260		600	860	M
	ELLVGG120MC	12.0		280		550	730	N
	ELLVGG150MC	15.0		420		450	670	O
	ELLVGG220MC	22.0		530		410	600	R
	ELLVGG330MC	33.0		790		350	450	T
	ELLVGG470MC	47.0		1200		260	360	V
	ELLVGG101MC	100		2950		180	250	Z


*1 Saturation Rated Current : This DC current which causes a 30 % inductance reduction from its nominal value.
*2 Temperature Rise Current : This indicates the value of current when temperature rise dt/t= 40 °C (at 20 °C).

Embossed Carrier Tape Dimensions in mm (not to scale)

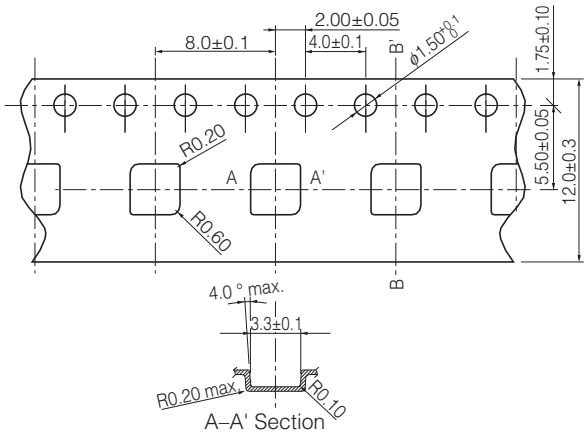




Type	t
ELLVEG	1.1±0.3
ELLVFG-C	1.3±0.3
ELLVGG	1.6±0.3
ELLVGG-C	1.6±0.3

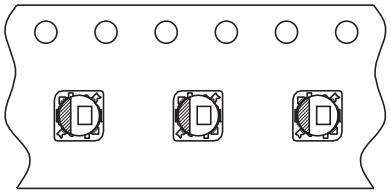

Quantity 2,000 pcs./reel



Power Inductors / Wire Wound type

Series : **G**
Type : **ELL4FG-A**
ELL4GG
ELL4LG-A


Type ELL4FG–A


Type ELL4GG


Type ELL4LG–A

Features

- Magnetic shielded structure
- Low DC resistance and large current capability
- Shock resistant
- RoHS compliant

Recommended Applications

- DSC, Tablet terminal, Portable game device, DC/DC converter circuit for cellular phone

Standard Packing Quantity

- 2,000 pcs./reel (ELL4FG-A/ELL4GG)
- 3,000 pcs./reel (ELL4LG-A)

■ As for Soldering Conditions and Safety Precautions,

Please see Data Files

Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11
E	L	L	4	F	G	1	0	0	M	
Product Code			Outer size	Height	Structure	Inductance			Tolerance	Design No.

ELL	Choke Coil (Magnetic shielded type)

F	1.2 max.
G	1.4 max.
L	1.8 max.

G	Series


2R2 → 2.2 µH
150 → 15 µH

M → ±20 %
N → ±30 %

F	A
G	—
L	A


Dimensions in mm (not to scale)

- ELL4FG-A
- ELL4LG-A

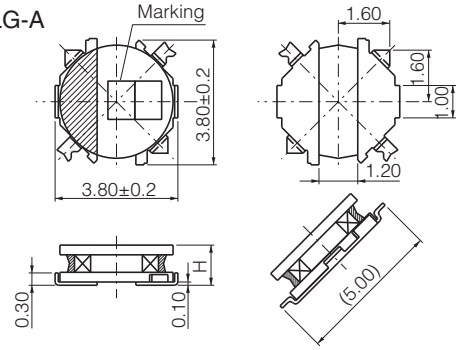


Type	H
ELL4FG-A	1.1±0.10 (1.20 max.)
ELL4LG-A	1.80 max.

- ELL4GG

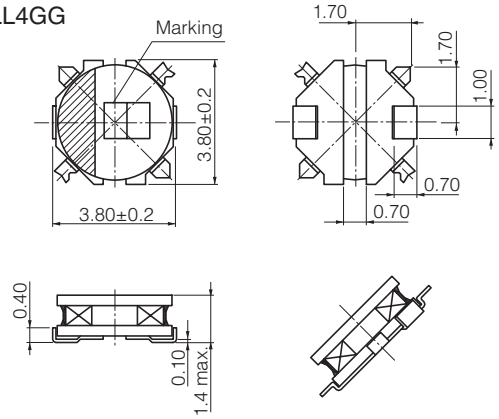


Recommended land patterns in mm (not to scale)

- ELL4FG-A
- ELL4LG-A



- ELL4GG

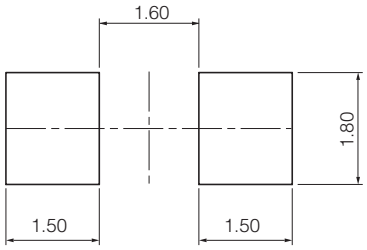


Standard Parts


Series	Part No.	Inductance (100 kHz)		RDC (at 20 °C)		Saturation Rated Current*1 (mA max.)	Temperature Rise Current*2 (mA max.)	Marking
		(μH)	Tol.	(mΩ)	Tol.			
Series 4FG-A	ELL4FG1R0NA	1.0	±30 %	45	±20 %	1900	1950	01
	ELL4FG1R5NA	1.5		60		1600	1700	06
	ELL4FG2R0NA	2.0		70		1300	1550	10
	ELL4FG3R3NA	3.3		110		1100	1220	16
	ELL4FG4R7NA	4.7		160		1000	1000	21
	ELL4FG6R8NA	6.8		220		800	860	26
	ELL4FG100MA	10.0	±20 %	290		700	750	31
	ELL4FG150MA	15.0		480		600	580	33
	ELL4FG220MA	22.0		620		420	500	36
	ELL4FG330MA	33.0		1060		360	400	39
	ELL4FG470MA	47.0		1600		290	330	51
Series 4GG	ELL4GG1R2N	1.2	±30 %	50	±20 %	2400	1900	03
	ELL4GG1R8N	1.8		71		1900	1550	09
	ELL4GG2R2N	2.2		88		1700	1400	11
	ELL4GG3R3N	3.3		110		1500	1200	16
	ELL4GG3R9N	3.9		120		1400	1150	19
	ELL4GG4R7N	4.7		160		1200	1000	21
	ELL4GG5R6N	5.6		170		1100	970	23
	ELL4GG6R8N	6.8		200		1050	930	26
	ELL4GG8R2N	8.2		220		1000	870	29
	ELL4GG100M	10.0	±20 %	250		900	770	31
	ELL4GG120M	12.0		380		800	650	32
	ELL4GG150M	15.0		500		700	580	33
	ELL4GG220M	22.0		640		600	500	36
	ELL4GG330M	33.0		980		450	400	39
	ELL4GG470M	47.0		1250		400	350	51
	ELL4GG101M	100.0		2400		290	250	56
Series 4LG-A	ELL4LG1R0NA	1.0	±30 %	43	±20 %	2200	1900	01
	ELL4LG1R5NA	1.5		48		1700	1800	06
	ELL4LG2R2NA	2.2		55		1500	1700	11
	ELL4LG2R7NA	2.7		63		1400	1550	13
	ELL4LG3R3NA	3.3		72		1300	1450	16
	ELL4LG4R7NA	4.7		90		1100	1300	21
	ELL4LG6R2NA	6.2		140		930	1100	25
	ELL4LG100MA	10.0	±20 %	200		800	950	31
	ELL4LG150MA	15.0		300		620	730	33
	ELL4LG220MA	22.0		390		550	640	36
	ELL4LG330MA	33.0		610		430	510	39
	ELL4LG470MA	47.0		920		360	410	51
	ELL4LG680MA	68.0		1300		270	350	53
	ELL4LG101MA	100.0		2200		250	260	56
	ELL4LG151MA	150.0		3000		220	220	59

*1 Saturation Rated Current : This DC current which causes a 30 % inductance reduction from its nominal value.
*2 Temperature Rise Current : This indicates the value of current when temperature rise dt/t= 40 °C (at 20 °C).


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Embossed Carrier Tape Dimensions in mm (not to scale)

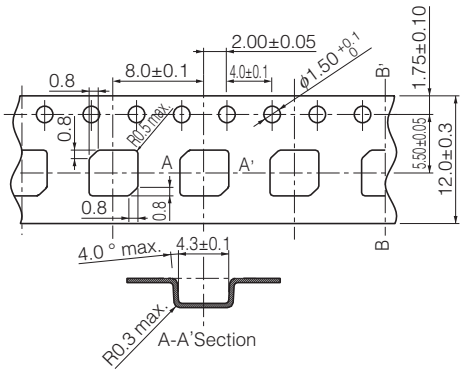



Type	t
ELL4FG-A	1.4±0.3
ELL4GG	1.6±0.3
ELL4LG-A	2.0±0.3

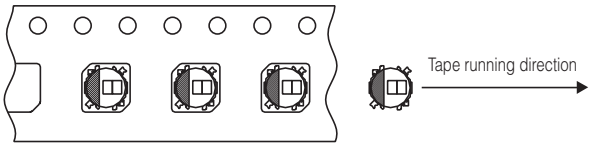

Quantity 2,000 pcs./reel (ELL4FG-A/ELL4GG)
Quantity 3,000 pcs./reel (ELL4LG-A)

Power Inductors / Wire Wound type

Series : **G**
Type : **ELL6GG**
ELL6PG



Features

- Magnetic shielded structure
- Low DC resistance and large current capability
- RoHS compliant

Recommended Applications

- DSC, Tablet terminal, Portable game device, DC/DC converter circuit for cellular phone

Standard Packing Quantity

- 1,000 pcs./reel

■ As for Soldering Conditions and Safety Precautions,

Please see Data Files

Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11
E	L	L	6	P	G	1	0	0	M	
Product Code			Outer size	Height	Structure	Inductance			Tolerance	Design No.

ELL	Choke Coil (Magnetic shielded type)


G	1.6 max.
P	2.0 max.

G	Series

2R2 → 2.2 µH
150 → 15 µH


M → ±20 %
N → ±30 %

Dimensions in mm (not to scale)

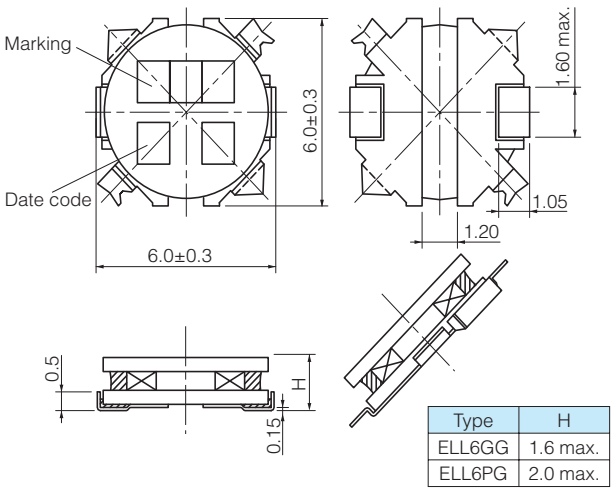

Type	H
ELL6GG	1.6 max.
ELL6PG	2.0 max.

Recommended land patterns in mm (not to scale)

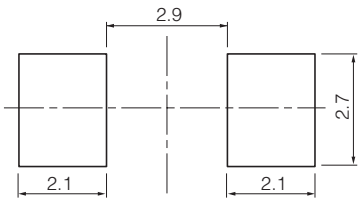


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Standard Parts

Series	Part No.	Inductance (100 kHz) (μH)	Tol.	RDC (at 20 °C) (mΩ)	Tol.	Saturation Rated Current*1 (mA max.)	Temperature Rise Current*2 (mA max.)	Marking
Series 6GG	ELL6GG1R0N	1.0	±30 %	27	±20 %	2500	2500	1R0
	ELL6GG1R5N	1.5		36		2300	2250	1R5
	ELL6GG2R2M	2.2	±20 %	45		1950	2000	2R2
	ELL6GG2R7M	2.7		54		1850	1800	2R7
	ELL6GG3R9M	3.9		60		1650	1700	3R9
	ELL6GG4R7M	4.7		70		1400	1550	4R7
	ELL6GG6R8M	6.8		110		1150	1300	6R8
	ELL6GG100M	10.0		170		900	1000	100
	ELL6GG150M	15.0		210		800	900	150
	ELL6GG220M	22.0		300		620	850	220
	ELL6GG330M	33.0		510		490	580	330
	ELL6GG470M	47.0		610		400	480	470
	ELL6GG680M	68.0		860		380	410	680
	ELL6GG101M	100.0		1480		300	350	101
Series 6PG	ELL6PGR08N	0.8	±30 %	24	±20 %	3800	2800	R08
	ELL6PG1R5N	1.5		30		2500	2500	1R5
	ELL6PG2R2N	2.2		37		2200	2200	2R2
	ELL6PG3R3N	3.3		44		1700	2000	3R3
	ELL6PG3R9N	3.9		51		1600	1900	3R9
	ELL6PG4R7N	4.7		58		1500	1750	4R7
	ELL6PG5R6N	5.6		65		1450	1650	5R6
	ELL6PG6R8N	6.8		70		1400	1600	6R8
	ELL6PG100M	10.0	±20 %	110		1300	1300	100
	ELL6PG120M	12.0		140		1100	1200	120
	ELL6PG150M	15.0		150		1000	1100	150
	ELL6PG220M	22.0		230		800	900	220
	ELL6PG270M	27.0		260		730	800	270
	ELL6PG330M	33.0		300		700	750	330
	ELL6PG470M	47.0		470		550	600	470
	ELL6PG560M	56.0		520		500	550	560
	ELL6PG680M	68.0		700		420	500	680
	ELL6PG820M	82.0		800		400	450	820
	ELL6PG101M	100.0		1000		380	400	101

*1 Saturation Rated Current : This DC current which causes a 30 % inductance reduction from its nominal value.
*2 Temperature Rise Current : This indicates the value of current when temperature rise dt/t= 40 °C (at 20 °C).

Embossed Carrier Tape Dimensions in mm (not to scale)

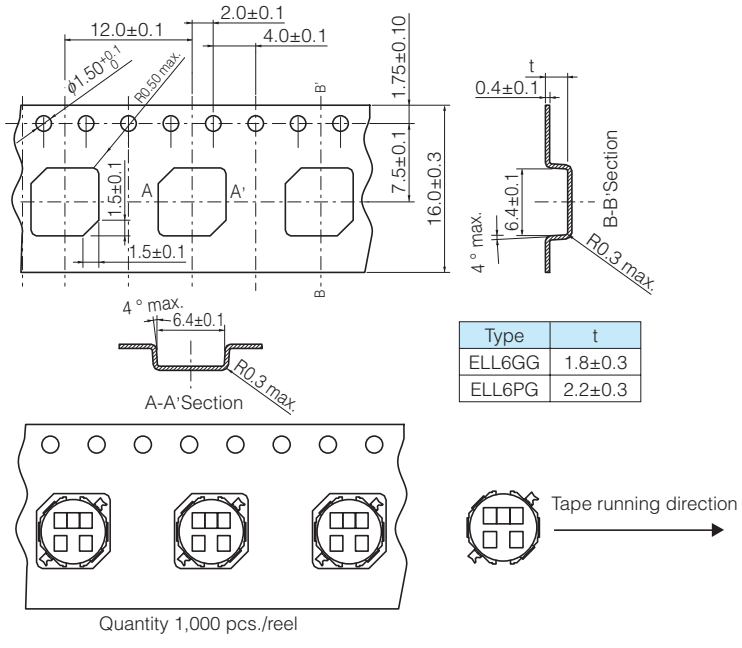


Type	t
ELL6GG	1.8±0.3
ELL6PG	2.2±0.3

Quantity 1,000 pcs./reel

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Power Inductors / Wire Wound type

Series : **H**
Type : **ELL6RH**
ELL6SH
ELL6UH

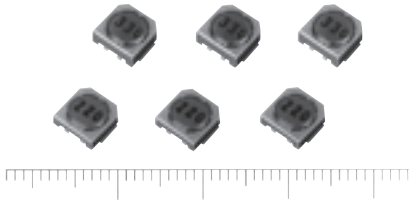

Features

- Thin (height 2.5 mm, 3.0 mm)
- Higher reliability in mounting by separating the user terminal and internal connection.
- Large current capability
- RoHS compliant

Recommended Applications

- Audiovisual equipment, Small portable device, DC/DC converter circuit for amusement machine

Cautionary Notes Regarding Usage in DC/DC converters

- Maximum Dissipation of 1 W.
- Maximum case temperature of 105 °C (Ambient & self-heating temperature)

Standard Packing Quantity

- 1,000 pcs./reel

■ As for Soldering Conditions and Safety Precautions,

Please see Data Files

Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11
E	L	L	6	S	H	2	2	0	M	
Product Code			Outer size	Height	Structure	Inductance			Tolerance	Design No.

ELL	Choke Coil (Magnetic shielded type)

R	2.8 max.
S	3.3 max.
U	5.0 max.


H	Series

2R2 → 2.2 µH
221 → 220 µH

M → ±20 %


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Dimensions in mm (not to scale)

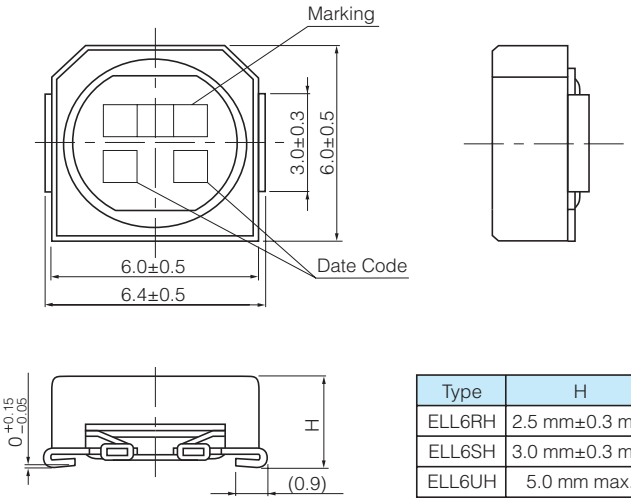


Type	H
ELL6RH	2.5 mm±0.3 mm
ELL6SH	3.0 mm±0.3 mm
ELL6UH	5.0 mm max.

Connections (Top view)



Recommended land patterns in mm (not to scale)



Standard Parts

Part No.	Inductance (μH) at 100 kHz Tol. ±20 %	RDC (mΩ) at 20 °C Tol. ±20 %		Rated Current* (mA) max.		Marking
		6RH	6SH	6RH	6SH	
ELL6□H1R0M	1.0	19	19	3000	3400	1R0
ELL6□H1R5M	1.5	24	24	2400	3200	1R5
ELL6□H2R0M	2.0	—	26	—	2600	2R0
ELL6□H2R2M	2.2	30	—	2300	—	2R2
ELL6□H2R7M	2.7	39	31	1800	2400	2R7
ELL6□H3R3M	3.3	44	34	1600	2200	3R3
ELL6□H4R7M	4.7	49	42	1580	2000	4R7
ELL6□H5R1M	5.1	56	—	1550	—	5R1
ELL6□H5R6M	5.6	—	49	—	1800	5R6
ELL6□H6R2M	6.2	62	—	1400	—	6R2
ELL6□H6R8M	6.8	—	52	—	1500	6R8
ELL6□H7R5M	7.5	80	—	1250	—	7R5
ELL6□H8R2M	8.2	87	61	1200	1400	8R2
ELL6□H100M	10.0	95	65	1100	1300	100
ELL6□H120M	12.0	130	71	1000	1200	120
ELL6□H150M	15.0	150	96	850	1100	150
ELL6□H180M	18.0	170	130	800	1000	180
ELL6□H220M	22.0	220	140	700	900	220
ELL6□H270M	27.0	260	160	650	800	270
ELL6□H330M	33.0	380	180	600	700	330
ELL6□H390M	39.0	410	240	550	650	390
ELL6□H470M	47.0	480	270	500	600	470
ELL6□H560M	56.0	540	290	450	550	560
ELL6□H680M	68.0	770	520	400	500	680
ELL6□H820M	82.0	870	600	350	450	820
ELL6□H101M	100.0	1000	680	300	400	101
ELL6□H121M	120.0	1500	750	280	370	121
ELL6□H151M	150.0	1800	860	250	350	151
ELL6□H181M	180.0	2000	1300	230	300	181
ELL6□H221M	220.0	2300	1400	200	280	221
ELL6□H271M	270.0	—	2400	—	260	271
ELL6□H331M	330.0	—	2700	—	240	331
ELL6□H391M	390.0	—	2800	—	210	391
ELL6□H471M	470.0	—	3200	—	200	471
ELL6□H561M	560.0	—	3700	—	180	561
ELL6□H681M	680.0	—	4300	—	160	681

* Current : This indicates the value of current when the inductance is 80% of nominal value or when the case temperature has risen 45 °C.


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Standard Parts


Part No.	Inductance (μH) at 100 kHz Tol. ±20 %	R_{DC} (mΩ) at 20 °C Tol. ±20 %	Rated Current* (mA) max.	Marking
ELL6UH100M	10.0	63	1800	100
ELL6UH120M	12.0	71	1700	120
ELL6UH150M	15.0	79	1600	150
ELL6UH180M	18.0	88	1400	180
ELL6UH220M	22.0	98	1300	220
ELL6UH270M	27.0	110	1200	270
ELL6UH330M	33.0	130	1100	330
ELL6UH390M	39.0	150	1000	390
ELL6UH470M	47.0	160	900	470
ELL6UH560M	56.0	210	800	560
ELL6UH680M	68.0	230	700	680
ELL6UH820M	82.0	260	650	820
ELL6UH101M	100.0	360	600	101
ELL6UH121M	120.0	480	580	121
ELL6UH151M	150.0	680	500	151
ELL6UH181M	180.0	750	470	181
ELL6UH221M	220.0	840	410	221
ELL6UH271M	270.0	1200	370	271
ELL6UH331M	330.0	1360	330	331
ELL6UH391M	390.0	1500	300	391
ELL6UH471M	470.0	1680	270	471
ELL6UH561M	560.0	2530	260	561
ELL6UH681M	680.0	2830	240	681
ELL6UH821M	820.0	3140	200	821
ELL6UH102M	1000.0	3670	180	102

✻ Current : This indicates the value of current when the inductance is 70% of nominal value or when the case temperature has risen 45 °C.

Embossed Carrier Tape Dimensions in mm (not to scale)

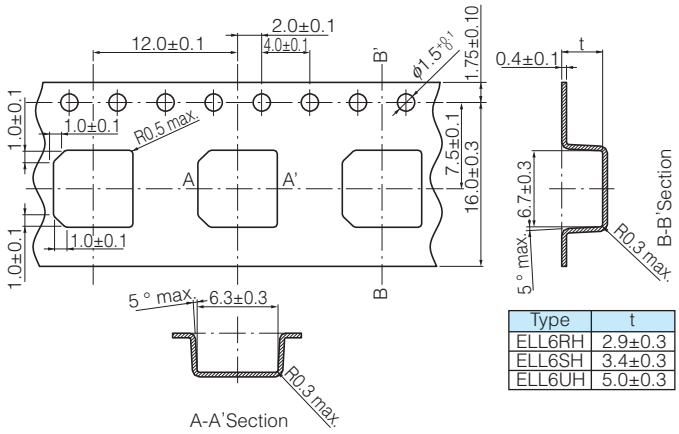


Type	t
ELL6RH	2.9±0.3
ELL6SH	3.4±0.3
ELL6UH	5.0±0.3

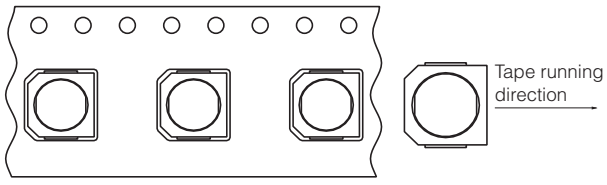

Quantity 1,000 pcs./reel

Power Inductors / Wire Wound type

Series : **P**
Type : **ELL8TP**



Features

- Magnetic shielded structure
- Low DC resistance and large current capability
- Available on tape and reel for automatic insertion
- RoHS compliant

Recommended Applications

- Audiovisual equipment, Appliance, Office automation equipment, Amusement machine, Power circuit for electric device

Standard Packing Quantity

- 500 pcs./reel

■ As for Soldering Conditions and Safety Precautions,


Please see Data Files

Explanation of Part Numbers


1	2	3	4	5	6	7	8	9	10	11
E	L	L	8	T	P	2	2	0	M	B
Product Code			Outer size	Height	Structure	Inductance			Tolerance	Design No.

ELL	Choke Coil (Magnetic shielded type)
T	5.0 max.
P	Series
4R7 → 4.7 µH 101 → 100 µH	
M → ±20 % N → ±30 %	

Dimensions in mm (not to scale)

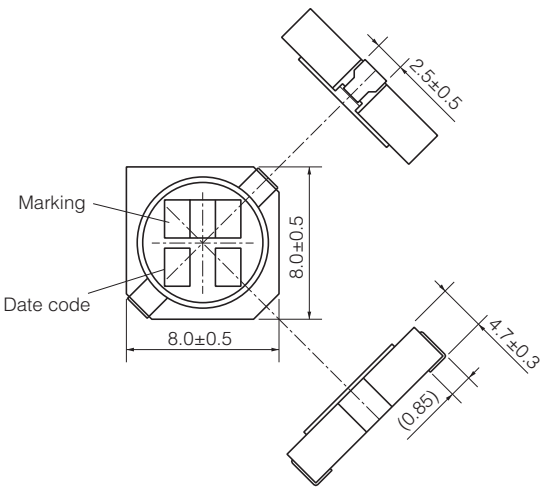

Recommended land patterns in mm (not to scale)

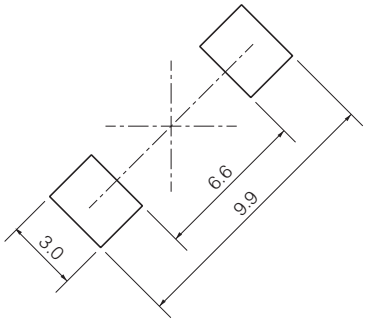


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.


Standard Parts

Part No.	Inductance (100 kHz)		RDC (at 20 °C)		Saturation Rated Current*1 (mA max.)	Temperature Rise Current*2 (mA max.)	Marking
	(μH)	Tol.	(mΩ)	Tol.			
ELL8TPR80NB	0.8	±30 %	3.6	±30 %	9500	9000	R80
ELL8TP1R2NB	1.2		4.7		8500	8000	1R2
ELL8TP2R5NB	2.5		7	±20 %	5500	6500	2R5
ELL8TP3R3NB	3.3		13		5000	4200	3R3
ELL8TP4R7NB	4.7		14		4000	4000	4R7
ELL8TP6R8NB	6.8		18		3500	3500	6R8
ELL8TP100MB	10.0	±20 %	25		3000	3000	100
ELL8TP150MB	15.0		44		2300	2300	150
ELL8TP220MB	22.0		55		2200	2000	220
ELL8TP330MB	33.0		84		1600	1600	330
ELL8TP470MB	47.0		100		1400	1500	470
ELL8TP680MB	68.0		140		1000	1300	680
ELL8TP101MB	100.0		190		900	1100	101
ELL8TP151MB	150.0		340		700	800	151
ELL8TP221MB	220.0		480		550	700	221
ELL8TP331MB	330.0		700		450	570	331
ELL8TP471MB	470.0		1000		400	480	471
ELL8TP681MB	680.0		1300		300	430	681
ELL8TP102MB	1000.0		2100		250	330	102

*1 Saturation Rated Current : This DC current which causes a 30% inductance reduction from its nominal value.
*2 Temperature Rise Current : This indicates the value of current when temperature rise dt/t= 40 °C (at 20 °C).

Embossed Carrier Tape Dimensions in mm (not to scale)

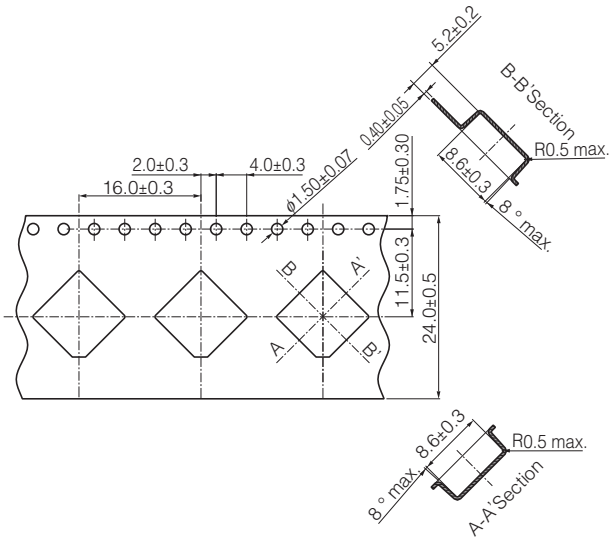

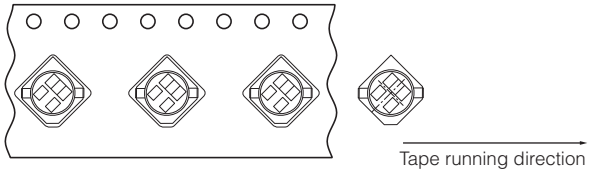

Quantity 500 pcs./reel

Power Inductors / Wire Wound type

Series : **P**
Type : **ELLATP**



Features

- Magnetic shielded structure
- Low DC resistance and large current capability
- Available on tape and reel for automatic insertion
- The new version of ELLATV serise
- RoHS compliant

Recommended Applications

- Audiovisual equipment, Appliance, Office automation equipment, Amusement machine, Power circuit for electric device

Standard Packing Quantity

- 500 pcs./reel

■ As for Soldering Conditions and Safety Precautions,


Please see Data Files

Explanation of Part Numbers


1	2	3	4	5	6	7	8	9	10	11
E	L	L	A	T	P	2	2	0	M	B
Product Code			Outer size	Height	Structure	Inductance			Tolerance	Design No.

ELL	Choke Coil (Magnetic shielded type)
T	4.5 max.
P	Series
4R7 → 4.7 µH 101 → 100 µH	
M → ±20 % N → ±30 %	

Dimensions in mm (not to scale)

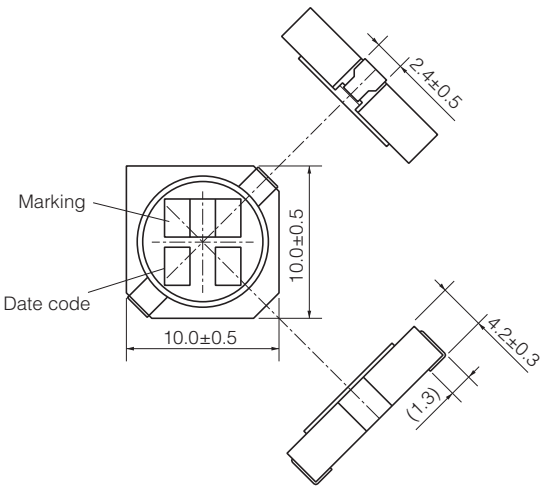

Recommended land patterns in mm (not to scale)

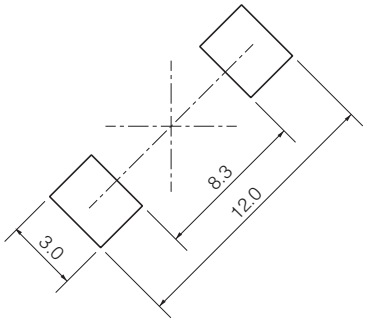


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Standard Parts

Part No.	Inductance (100 kHz)		R_{DC} (at 20 °C)		Saturation Rated Current*1 (mA max.)	Temperature Rise Current*2 (mA max.)	Marking
	(μH)	Tol.	(mΩ)	Tol.			
ELLATP1R0NB	1.0	±30 %	3.6	±30 %	9000	8000	1R0
ELLATP1R5NB	1.5		4.4		8000	7000	1R5
ELLATP2R7NB	2.7		6.4		5500	6500	2R7
ELLATP3R3NB	3.3		7.5		5350	5500	3R3
ELLATP4R7NB	4.7		9.1		4500	5000	4R7
ELLATP5R1NB	5.1		12	±20 %	4350	4500	5R1
ELLATP6R8NB	6.8		15		4000	4000	6R8
ELLATP8R2NB	8.2		18		3700	3700	8R2
ELLATP100MB	10.0	±20 %	22		3300	3300	100
ELLATP120MB	12.0		25		2900	2900	120
ELLATP150MB	15.0		29		2700	2700	150
ELLATP220MB	22.0		38		2200	2500	220
ELLATP270MB	27.0		47		1900	2200	270
ELLATP330MB	33.0		59		1800	2000	330
ELLATP390MB	39.0		66		1600	1800	390
ELLATP470MB	47.0		80		1500	1700	470
ELLATP680MB	68.0		120		1100	1400	680
ELLATP820MB	82.0		140		1050	1300	820
ELLATP101MB	100.0		180		1000	1200	101
ELLATP121MB	120.0		200		900	1000	121
ELLATP151MB	150.0		250		780	900	151
ELLATP181MB	180.0		320		750	750	181
ELLATP221MB	220.0		360		700	700	221
ELLATP331MB	330.0		550		550	600	331
ELLATP471MB	470.0		780		470	500	471
ELLATP681MB	680.0		1150		380	450	681
ELLATP102MB	1000.0		1700		310	370	102

*1 Saturation Rated Current : This DC current which causes a 30% inductance reduction from its nominal value.
*2 Temperature Rise Current : This indicates the value of current when temperature rise dt/t= 40 °C (at 20 °C).


Embossed Carrier Tape Dimensions in mm (not to scale)

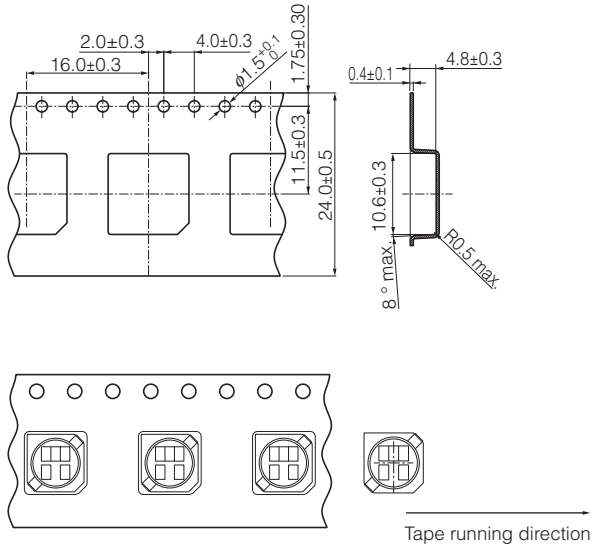

Quantity 500 pcs./reel

Power Inductors / Wire Wound type

Series : **P**
Type : **ELLCTP**



Features

- Magnetic shielded structure
- Low DC resistance and large current capability
- Available on tape and reel for automatic insertion
- RoHS compliant

Recommended Applications

- Audiovisual equipment, Appliance, Office automation equipment, Amusement machine, Power circuit for electric device

Standard Packing Quantity

- 500 pcs./reel

■ As for Soldering Conditions and Safety Precautions,


Please see Data Files

Explanation of Part Numbers


1	2	3	4	5	6	7	8	9	10	11
E	L	L	C	T	P	2	2	0	M	
Product Code			Outer size	Height	Structure	Inductance			Tolerance	Design No.

ELL	Choke Coil (Magnetic shielded type)
T	4.5 max.
P	Series
4R7 → 4.7 µH 101 → 100 µH	
M → ±20 % N → ±30 %	

Dimensions in mm (not to scale)

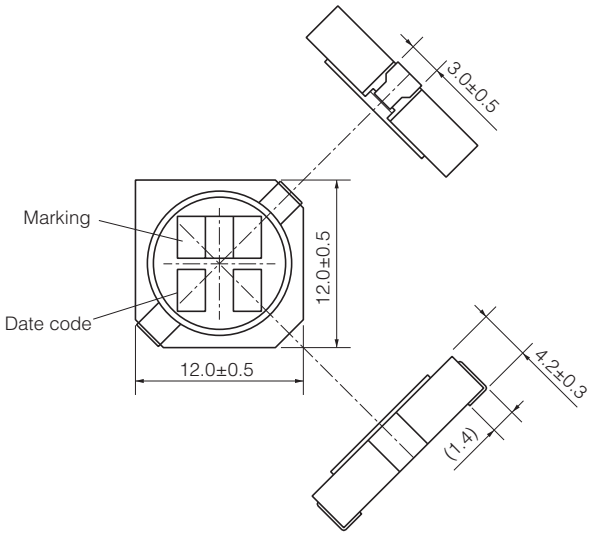

Recommended land patterns in mm (not to scale)

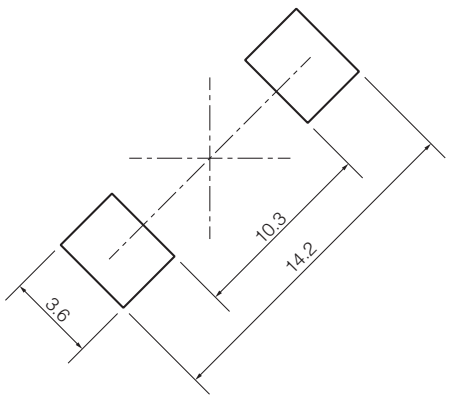


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.


Standard Parts

Part No.	Inductance (100 kHz)		RDC (at 20 °C)		Saturation Rated Current*1 (mA max.)	Temperature Rise Current*2 (mA max.)	Marking
	(μH)	Tol.	(mΩ)	Tol.			
ELLCTP1R2NB	1.2	±30 %	4.6	±30 %	11000	7000	1R2
ELLCTP2R0NB	2.0		5.6		9000	6500	2R0
ELLCTP3R3NB	3.3		7.0		7000	5800	3R3
ELLCTP4R3NB	4.3		8.5		6000	5000	4R3
ELLCTP5R6NB	5.6		10.0	±20 %	5500	4500	5R6
ELLCTP6R8NB	6.8		12.5		5000	4000	6R8
ELLCTP9R1NB	9.1		15.0		4400	3800	9R1
ELLCTP150MB	15.0	±20 %	27.0		3100	3100	150
ELLCTP220MB	22.0		34.0		2600	2600	220
ELLCTP330MB	33.0		52.0		2200	2100	330
ELLCTP470MB	47.0		72.0		1900	1800	470
ELLCTP680MB	68.0		97.0		1500	1500	680
ELLCTP101MB	100.0		150.0		1200	1200	101
ELLCTP151MB	150.0		220.0		1050	1000	151
ELLCTP221MB	220.0		310.0		900	850	221
ELLCTP331MB	330.0		500.0		750	700	331
ELLCTP471MB	470.0		670.0		600	550	471
ELLCTP681MB	680.0		1070.0		550	450	681
ELLCTP102MB	1000.0		1470.0		400	400	102

*1 Saturation Rated Current : This DC current which causes a 30% inductance reduction from its nominal value.
*2 Temperature Rise Current : This indicates the value of current when temperature rise dt/t= 40 °C (at 20 °C).

Embossed Carrier Tape Dimensions in mm (not to scale)

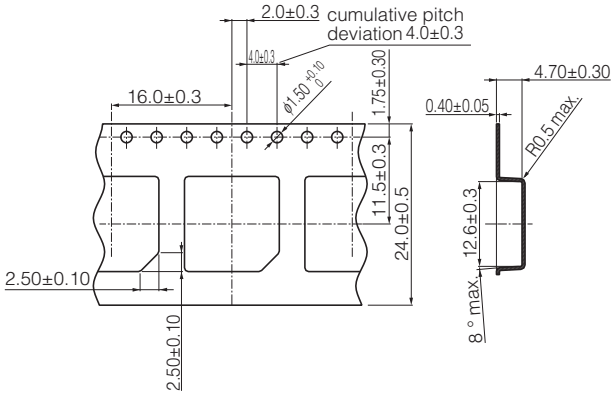


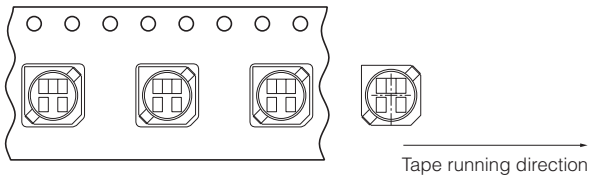

Quantity 500 pcs./reel

Soldering Conditions

Reflow soldering conditions

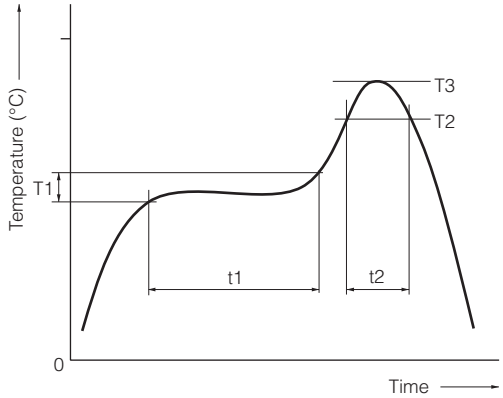

● Pb free solder recommended temperature profile

Products Item	Preheat		Soldering		Peak Temperature		Time of Reflow
	T1 [°C]	t1 [s]	T2 [°C]	t2 [s]	T3	T3 Limit	
Power Inductors / Wire Wound type	150 to 170	60 to 120	230 °C	30 max.	245 °C, 10 s	260 °C, 10 s	2 times max.

⚠ Safety Precautions
(Common precautions for Power Inductors / Wire Wound type)

- When using our products, no matter what sort of equipment they might be used for, be sure to make a written agreement on the specifications with us in advance. The design and specifications in this catalog are subject to change without prior notice.
- Do not use the products beyond the specifications described in this catalog.
- This catalog explains the quality and performance of the products as individual components. Before use, check and evaluate their operations when installed in your products.
- Install the following systems for a failsafe design to ensure safety if these products are to be used in equipment where a defect in these products may cause the loss of human life or other significant damage, such as damage to vehicles (automobile, train, vessel), traffic lights, medical equipment, aerospace equipment, electric heating appliances, combustion/gas equipment, rotating equipment, and disaster/crime prevention equipment.

✻Systems equipped with a protection circuit and a protection device
✻Systems equipped with a redundant circuit or other system to prevent an unsafe status in the event of a single fault

⚠ Precautions for use

1. Operation range and environments
① These products are designed and manufactured for general and standard use in general electronic equipment (e.g. AV equipment, home electric appliances, office equipment, information and communication equipment)
② These products are not intended for use in the following special conditions. Before using the products, carefully check the effects on their quality and performance, and determine whether or not they can be used.
- In liquid, such as water, oil, chemicals, or organic solvent
- In direct sunlight, outdoors, or in dust
- In salty air or air with a high concentration of corrosive gas, such as Cl_2, H_2S, NH_3, SO_2, or NO_2
- In an environment where these products cause dew condensation

2. Handling
① Do not bring magnets or magnetized materials close to the product. The influence of their magnetic field can change the inductance value.
② Do not apply strong mechanical shocks by either dropping or collision with other parts.
Excessive shock can damage the part.

3. Washing of board
Kindly consult the Technical department before washing of the PWB with any cleansing agent, and provide the washing condition.

4. Resoldering with a soldering iron
The temperature of the tip of the soldering iron should be 360 °C or less, 4 seconds.
And resoldering with a soldering iron should be limited to 1 time, and after that should be cooling these.

5. Mounting side
External force must be less than 5.0 [N] : while mounting.

6. Storage conditions
Normal temperature (–5 to 35 °C), normal humidity (85 % RH max.), shall not be exposed to direct sunlight and harmful gases and care should be taken so as not to cause dew.

<Package markings>
Package markings include the product number, quantity, and country of origin.
In principle, the country of origin should be indicated in English.

Voltage Step-up Coils

Series : **Chip**
Type : **3KN**



ELT3KN

High inductance Voltage Step-up coil chip series for piezoelectric buzzers and DC/DC circuitry of EL panels

Features

- Small and thin
- High inductance
- RoHS compliant

Recommended Applications

- Piezoelectric buzzer, Booster circuit for EL backlight (Watch, Electric thermometer, Portable device)
- HAC inductor (Smartphone, Cellular phone)

Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10
E	L	T	3	K	N	0	0	4	C

Product Code | Outer size | Construction | Design No. | Packaging


B	ϕ180 Reel
C	ϕ370 Reel

Standard Packing Quantity

- 1,000 or 5,000 pcs./reel

Dimensions in mm (not to scale)

- Type 3KN

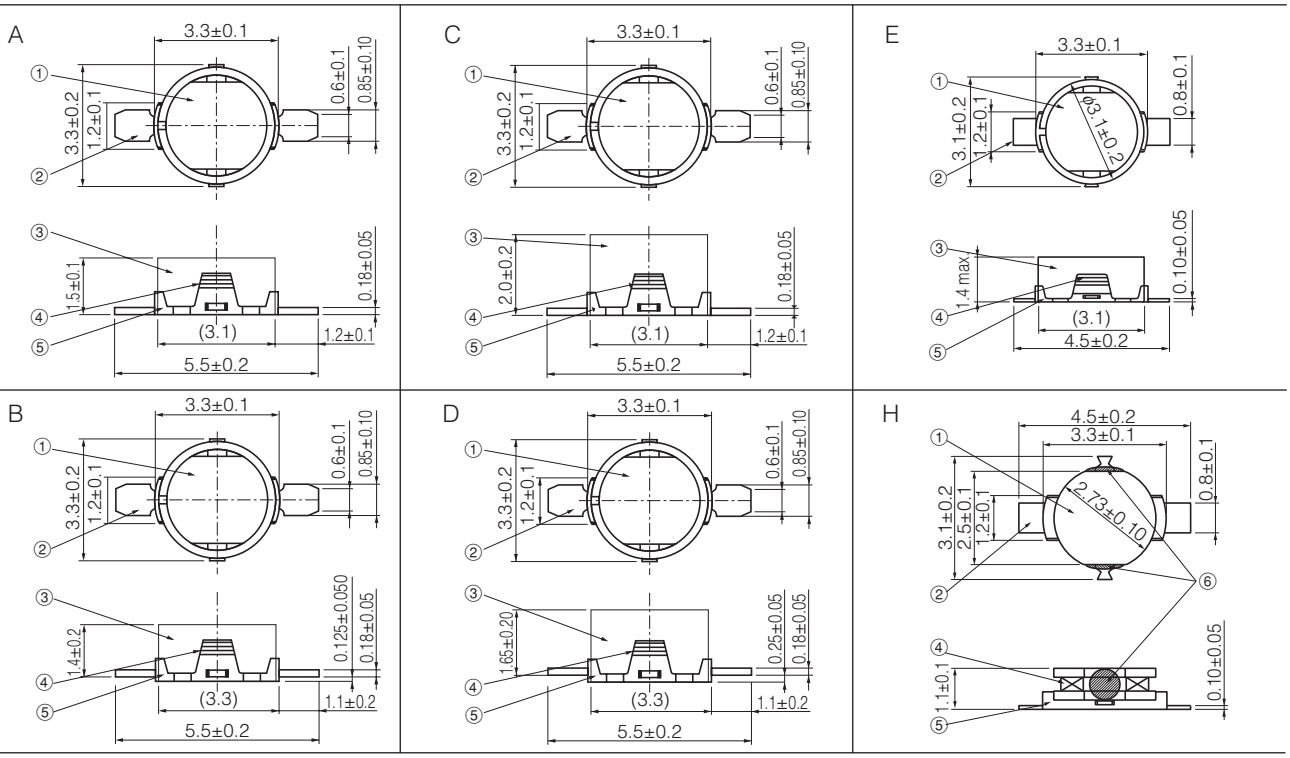

Part Name: ① Core ② Terminal ③Ring ④ Coil ⑤ Terminal board ⑥ Adhesive

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Standard Parts

Part No.	Inductance		R. D. C		I.D.C (mA) max.	Dimensions	Magnetic Composition
	(mH)	Tolerance(%)	(Ω)	Tolerance(%)			
ELT3KN004□	14.00	±40	125	±10	1.7	A	Permalloy ring
ELT3KN007□	20.00		170		1.4		
ELT3KN113□	1.00	±10	34	±15	25.0		Brass ring
ELT3KN126□	1.50		49		29.0		
ELT3KN142□	0.82		24		30.0		
ELT3KN019□	14.00	±40	125	±10	1.7	B	Permalloy ring
ELT3KN109□	3.80	±10	115	±20	15.0		Brass ring
ELT3KN114□	2.50		83	±15	15.0		
ELT3KN014□	30.00	±40	150		1.9	C	Permalloy ring
ELT3KN018□	35.00		235	±10	1.9		
ELT3KN028□	50.00	±35	250	±15	1.4		
ELT3KN032□	25.00	±40	185		10.0		
ELT3KN101□	10.00	±10	285	±10	1.4		Brass ring
ELT3KN104□	1.00		35	±15	30.0		
ELT3KN118□	2.50		64		20.0		
ELT3KN121□	1.00		22.5		40.0		
ELT3KN122□	2.00		44		20.0		
ELT3KN123□	1.00		25		30.0		
ELT3KN124□	4.00		85		15.0		
ELT3KN127□	0.47		14		50.0		
ELT3KN128□	0.56		15		45.0		
ELT3KN129□	0.68		17		34.0		
ELT3KN130□	2.30		51		23.0		
ELT3KN131□	2.00		44		20.0		
ELT3KN020□	30.00	±30	150		2.5	D	Permalloy ring
ELT3KN111□	7.50	±10	177		10.0		Brass ring
ELT3KN125□	4.00		85		15.0		
ELT3KN041□	14.00	±40	125	±10	1.7	E	Permalloy ring
ELT3KN042□	20.00		175		1.4		
ELT3KN043□	12.00		117		1.7		
ELT3KN139□	0.68	±10	19	±15	40.0		Brass ring
ELT3KN140□	0.82		22		30.0		
ELT3KN135□	1.10		32		30.0		
ELT3KN136□	2.00		55		20.0		
ELT3KN137□	4.00		117	±10	15.0		
ELT3KN149□	0.33		11	±15	60.0		
ELT3KN151□	0.56		17		50.0		
ELT3KN152□	0.47		14		50.0		
ELT3KN155□	1.10		38		25.0	H	Ring less
ELT3KN162□	4.00		117	±10	15.0	E	Brass ring
ELT3KN163□	1.10		32	±15	30.0		

"□" shows the packaging specifications.


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Packaging Methods

● Standard Packing Quantity

Packaging	ELT3KN	Kind of Taping
B	1,000 pcs.	Embossed Carrier Taping
C	5,000 pcs.	


● Embossed Carrier Tape Dimensions in mm (not to scale)

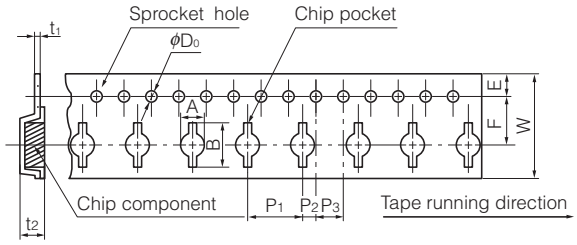

Part No.	A	B	W	F	E	P_1
ELT3KN	3.7	6.4	12.0	5.5	1.75	8.0


Part No.	P_2	P_3	ϕD_0	t_1	t_2
ELT3KN	2.0	4.0	1.5	0.3	2.6

● Reel Dimensions in mm (not to scale)

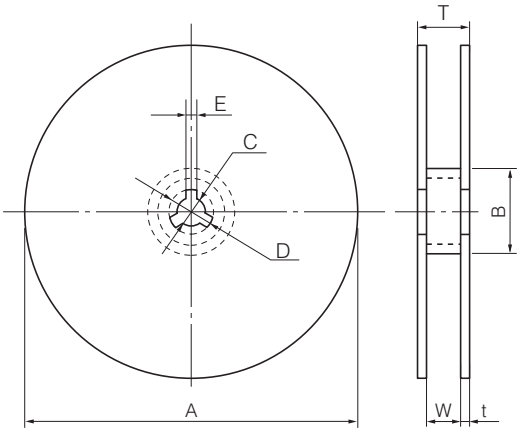


Packaging	A	B	C	D	E	W	t	T
B	180	60	13	21	2	13	1.1	15.2
C	370	60	13	21	2	14	2.0	18


● Leader Part, Vacant Position

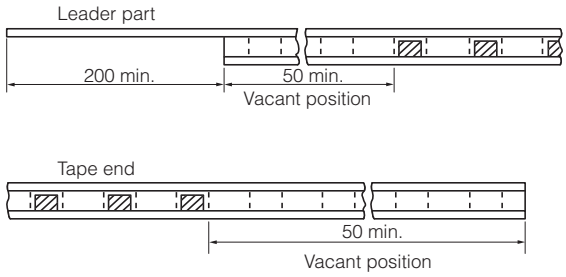

Applied Diagram Examples

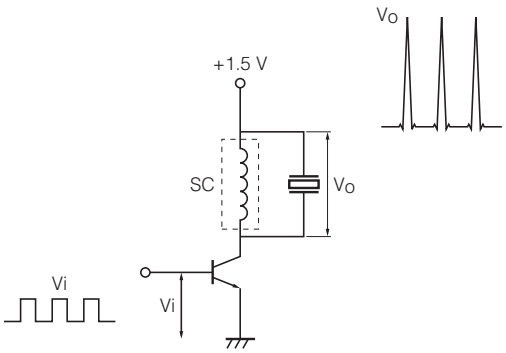

For buzzer

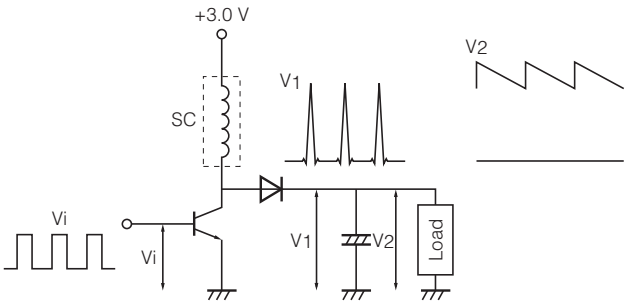


For EL DC/DC

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Soldering Conditions

Reflow soldering conditions

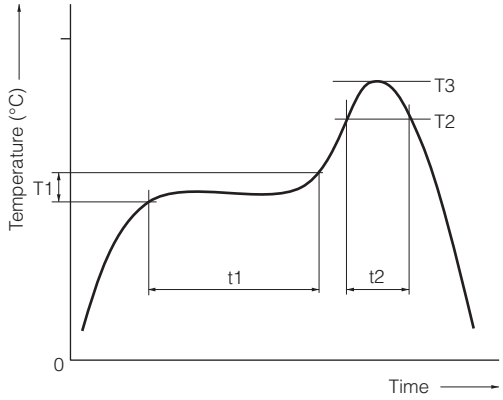

● Pb free solder recommended temperature profile

Part No.	Preheat		Soldering		Peak Temperature		Time of Reflow
	T1 [°C]	t1 [s]	T2 [°C]	t2 [s]	T3	T3 Limit	
ELT3KN	150 to 170	60 to 120	230 °C	30 max.	245 °C, 10 s	260 °C, 10 s	2 times max.

⚠ Safety Precautions
(Common precautions for Voltage Step-up Coils)

- When using our products, no matter what sort of equipment they might be used for, be sure to make a written agreement on the specifications with us in advance. The design and specifications in this catalog are subject to change without prior notice.
- Do not use the products beyond the specifications described in this catalog.
- This catalog explains the quality and performance of the products as individual components. Before use, check and evaluate their operations when installed in your products.
- Install the following systems for a failsafe design to ensure safety if these products are to be used in equipment where a defect in these products may cause the loss of human life or other significant damage, such as damage to vehicles (automobile, train, vessel), traffic lights, medical equipment, aerospace equipment, electric heating appliances, combustion/gas equipment, rotating equipment, and disaster/crime prevention equipment.


✻ Systems equipped with a protection circuit and a protection device
✻ Systems equipped with a redundant circuit or other system to prevent an unsafe status in the event of a single fault

⚠ Precautions for use


1. Operation range and environments
① These products are designed and manufactured for general and standard use in general electronic equipment (e.g. AV equipment, home electric appliances, office equipment, information and communication equipment)
② These products are not designed for the use in the following special conditions. Before using the products, carefully check the effects on their quality and performance, and determine whether or not they can be used.
- In liquid, such as water, oil, chemicals, or organic solvent
- In direct sunlight, outdoors, or in dust
- In salty air or air with a high concentration of corrosive gas, such as Cl_2, H_2S, NH_3, SO_2, or NO_2
- In an environment where these products cause dew condensation

2. Handling
① Do not bring magnets or magnetized materials close to the product. The influence of their magnetic field can change the inductance value.
② Do not apply strong mechanical shocks by either dropping or collision with other parts.
Excessive schock can damage the part.

3. Resoldering with a soldering iron
① Resoldering should be done within 3 seconds by soldering iron, the temperature with 350 °C or less and should be cooling down after ward. Both side of terminals shall be fixed closely to PWB. And terminals shall not be pressed in heating.



② The wiring tab shall not be held by sharp-edged tool.



③ Iron shall not be put to the component itself.

4. Mounting side
① External force must be less than 4.9N while mounting.
② The wiring tab is expose the terminal, so please be careful when you design PWB pattern of coil circumference.

5. Cleaning
If you clean the inductor, please use own your ultrasonic cleaning to check specified conditions.

6. Storage conditions
Normal temperature (–5 to 35 °C), normal humidity (85 % RH max.), shall not be exposed to direct sunlight and harmful gases and care should be taken so as not to cause dew.

<Package markings>
Package markings include the product number, quantity, and country of origin.
In principle, the country of origin should be indicated in English.

Choke Coils

Series : **Pin terminal**
Type : **09D, 11D, 12D, 16B, 18B, 10E, 12E, 15E, 18E**

Pin terminal inductors featuring small size and high performance



Features

- High - μ and High Bm cores
- Wide inductor range
- Magnetic shield type (E Type)
- RoHS compliant

Recommended Applications

- Appliance, Office automation equipment, Amusement machine, Power circuit for electric device

Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11
E	L	C	0	9	D	2	R	2		*

Product code | Style | Construction | Inductance | Packaging | Design No.


Core size, Terminal board or Case size
09
11
12
15
16
18


D	Core, Terminal / Core, Case, Terminal
B	Core, Terminal board, Terminal
E	Core (Magnetic Shielded), Terminal board, Terminal
P	Core, Direct terminal by wire

Taping	D
Other	Omission

* E, F etc.





Available I-L Characteristics

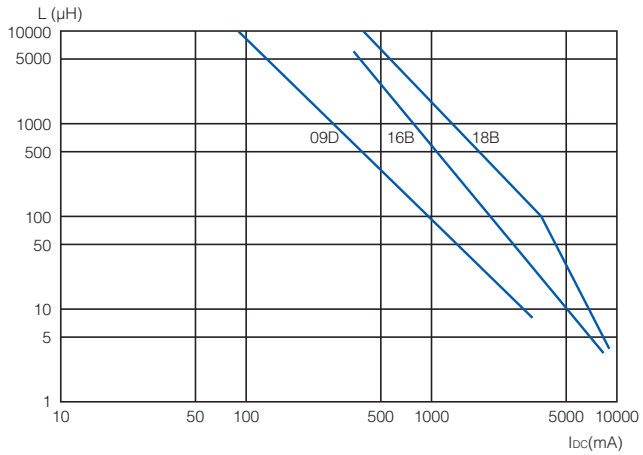

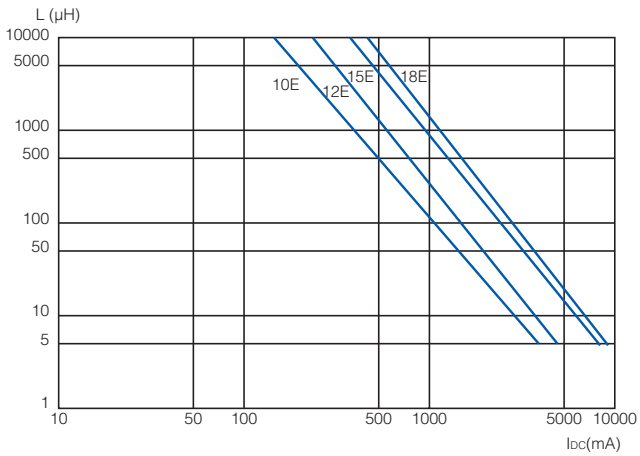

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Performance Characteristics by Series


	Type	Construction	External Dimensions D×H (mm)	Inductance (μH) 0.1 1.0 10 100 1000 10000	Current IDC (A)
Regular	09D *		φ9.5×8.9 (with case)	2.2 – 10000	0.08 to 3.5
	11D *		φ11.5×13.9 (with case)	2.2 – 10000	0.16 to 5.3
	12D		φ12.5×16.5	100 – 10000	0.27 to 1.9
	16B		φ16.0×23.0	3.3 – 10000	0.26 to 8.5
	18B		φ20.0×27.0	3.3 – 10000	0.36 to 8.5
Shield	10E–L		φ10.0×13.0	3.9 – 8200	0.10 to 2.9
	12E–L		φ13.0×18.5	4.7 – 10000	0.13 to 4.4
	15E–L		φ16.0×22.0 (3 pin terminal)	5.6 – 10000	0.30 to 5.4
	18E–L		φ19.0×25.1 (4 pin terminal)	5.6 – 10000	0.33 to 5.9


✻ : Taping Available

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.


Examples Type 09D

[Dimensions in mm]
(not to scale)






Recommended PWB
piercing plan



Connection Schematic




Part No.	Inductance (μH)	Tolerance (%)	Test Freq. (kHz)	R_{DC}.(Ω) [at 20 °C] (Tol.±20 %)	I_{DC}.* [at 20 °C] (A)max.
ELC09D2R2□F	2.2	±20	10	0.012	3.50
ELC09D2R7□F	2.7			0.013	3.30
ELC09D3R3□F	3.3			0.015	3.20
ELC09D3R9□F	3.9			0.016	3.10
ELC09D4R7□F	4.7			0.018	3.00
ELC09D5R6□F	5.6			0.019	2.90
ELC09D6R8□F	6.8			0.021	2.80
ELC09D8R2□F	8.2			0.024	2.60
ELC09D100□F	10.0			0.027	2.50
ELC09D120□F	12.0			0.031	2.30
ELC09D150□F	15.0			0.035	2.10
ELC09D180□F	18.0			0.038	2.00
ELC09D220□F	22.0	±10		0.051	1.80
ELC09D270□F	27.0			0.058	1.60
ELC09D330□F	33.0			0.081	1.40
ELC09D390□F	39.0			0.087	1.30
ELC09D470□F	47.0			0.110	1.20
ELC09D560□F	56.0			0.130	1.10
ELC09D680□F	68.0			0.140	1.00
ELC09D820□F	82.0			0.160	0.90
ELC09D101□F	100.0			0.200	0.82
ELC09D121□F	120.0			0.250	0.77
ELC09D151□F	150.0			0.320	0.74
ELC09D181□F	180.0			0.360	0.61
ELC09D221□F	220.0			0.410	0.58
ELC09D271□F	270.0			0.500	0.52
ELC09D331□F	330.0			0.650	0.49
ELC09D391□F	390.0			0.860	0.46
ELC09D471□F	470.0			0.980	0.39
ELC09D561□F	560.0			1.100	0.36
ELC09D681□F	680.0			1.400	0.34
ELC09D821□F	820.0			1.600	0.30
ELC09D102□F	1000.0			2.100	0.28
ELC09D122□F	1200.0			2.400	0.23
ELC09D152□F	1500.0			2.800	0.21
ELC09D182□F	1800.0			3.800	0.19
ELC09D222□F	2200.0			4.400	0.17
ELC09D272□F	2700.0			6.100	0.16
ELC09D332□F	3300.0			7.000	0.14
ELC09D392□F	3900.0			8.000	0.13
ELC09D472□F	4700.0			11.200	0.12
ELC09D562□F	5600.0			12.600	0.11
ELC09D682□F	6800.0			14.400	0.10
ELC09D822□F	8200.0			16.600	0.09
ELC09D103□F	10000.0			18.800	0.08


* Allowable DC Current: Smaller current value either when the inductance is –10 % or when the case temperature has risen 45 °C.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.


Examples Type 11D

[Dimensions in mm]
(not to scale)






Recommended PWB
piercing plan



Connection Schematic




Part No.	Inductance (μH)	Tolerance (%)	Test Freq. (kHz)	R_{DC}.(Ω) [at 20 °C] (Tol.±20 %)	I_{DC}.* [at 20 °C] (A)max.
ELC11D2R2□F	2.2	±20	10	0.013	5.30
ELC11D2R7□F	2.7			0.014	5.10
ELC11D3R3□F	3.3			0.015	4.90
ELC11D3R9□F	3.9			0.016	4.80
ELC11D4R7□F	4.7			0.018	4.70
ELC11D5R6□F	5.6			0.020	4.60
ELC11D6R8□F	6.8			0.022	4.40
ELC11D8R2□F	8.2			0.024	3.90
ELC11D100□F	10.0			0.029	3.50
ELC11D120□F	12.0			0.030	3.40
ELC11D150□F	15.0			0.033	3.30
ELC11D180□F	18.0			0.037	3.10
ELC11D220□F	22.0	±10		0.040	2.80
ELC11D270□F	27.0			0.048	2.70
ELC11D330□F	33.0			0.051	2.60
ELC11D390□F	39.0			0.057	2.50
ELC11D470□F	47.0			0.063	2.30
ELC11D560□F	56.0			0.071	2.10
ELC11D680□F	68.0			0.082	2.00
ELC11D820□F	82.0			0.090	1.90
ELC11D101□F	100.0			0.120	1.80
ELC11D121□F	120.0			0.160	1.60
ELC11D151□F	150.0			0.180	1.40
ELC11D181□F	180.0			0.200	1.30
ELC11D221□F	220.0			0.230	1.20
ELC11D271□F	270.0			0.320	1.10
ELC11D331□F	330.0			0.350	1.00
ELC11D391□F	390.0			0.400	0.95
ELC11D471□F	470.0			0.490	0.82
ELC11D561□F	560.0			0.620	0.73
ELC11D681□F	680.0			0.780	0.64
ELC11D821□F	820.0			0.870	0.62
ELC11D102□F	1000.0			1.100	0.57
ELC11D122□F	1200.0			1.200	0.52
ELC11D152□F	1500.0			1.700	0.43
ELC11D182□F	1800.0			2.000	0.40
ELC11D222□F	2200.0			2.300	0.38
ELC11D272□F	2700.0			2.800	0.34
ELC11D332□F	3300.0			3.600	0.31
ELC11D392□F	3900.0			4.500	0.29
ELC11D472□F	4700.0			5.200	0.26
ELC11D562□F	5600.0			6.900	0.23
ELC11D682□F	6800.0			7.800	0.21
ELC11D822□F	8200.0			10.600	0.18
ELC11D103□F	10000.0			11.800	0.16

✻ Allowable DC Current: Smaller current value either when the inductance is –10 % or when the case temperature has risen 45 °C.


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Examples Type 12D


[Dimensions in mm]
(not to scale)

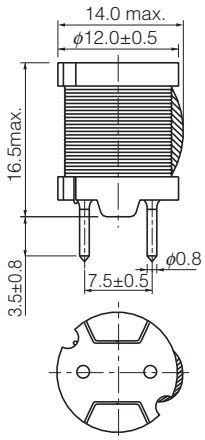

Recommended PWB
piercing plan



Connection Schematic




Part No.	Inductance (μH)	Tolerance (%)	Test Freq. (kHz)	R_{DC}.(Ω) [at 20 °C] (Tol.±20 %)	I_{DC}.* [at 20 °C] (A)max.
ELC12D101E	100	±10	10	0.150	1.90
ELC12D121E	120			0.170	1.78
ELC12D151E	150			0.190	1.67
ELC12D181E	180			0.210	1.58
ELC12D221E	220			0.230	1.55
ELC12D271E	270			0.270	1.44
ELC12D331E	330			0.300	1.34
ELC12D391E	390			0.330	1.32
ELC12D471E	470			0.380	1.25
ELC12D561E	560			0.420	1.15
ELC12D681E	680			0.460	0.98
ELC12D821E	820			0.650	0.94
ELC12D102E	1000			0.720	0.87
ELC12D122E	1200			0.830	0.86
ELC12D152E	1500			1.270	0.64
ELC12D182E	1800			1.330	0.63
ELC12D222E	2200			1.500	0.60
ELC12D272E	2700			1.890	0.54
ELC12D332E	3300			2.370	0.48
ELC12D392E	3900			2.830	0.45
ELC12D472E	4700			3.190	0.41
ELC12D562E	5600			4.080	0.34
ELC12D682E	6800			5.740	0.29
ELC12D822E	8200			6.340	0.28
ELC12D103E	10000			7.200	0.27

✻ Allowable DC Current: Smaller current value either when the inductance is –10 % or when the case temperature has risen 45 °C.


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Examples Type 16B


[Dimensions in mm]
(not to scale)

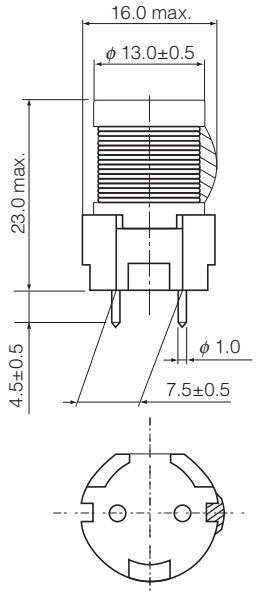

Recommended PWB
piercing plan



Connection Schematic




Part No.	Inductance (μH)	Tolerance (%)	Test Freq. (kHz)	$R_{DC.}$(Ω) [at 20 °C] (Tol.±30 %)** (Tol.±20 %)	$I_{DC.}$* [at 20 °C] (A)max.
ELC16B3R3L	3.3	±25	10	0.012**	8.50
ELC16B3R9L	3.9			0.013**	8.00
ELC16B4R7L	4.7	±20		0.015**	7.80
ELC16B5R6L	5.6			0.016**	7.40
ELC16B6R8L	6.8			0.018	6.70
ELC16B8R2L	8.2			0.019	6.10
ELC16B100L	10.0			0.022	5.60
ELC16B120L	12.0			0.023	5.50
ELC16B150L	15.0			0.026	5.40
ELC16B180L	18.0			0.028	5.10
ELC16B220L	22.0	±10		0.031	4.60
ELC16B270L	27.0			0.034	4.30
ELC16B330L	33.0			0.039	4.00
ELC16B390L	39.0			0.042	3.90
ELC16B470L	47.0			0.045	3.80
ELC16B560L	56.0			0.051	3.40
ELC16B680L	68.0			0.057	3.20
ELC16B820L	82.0			0.064	3.00
ELC16B101L	100.0			0.072	2.60
ELC16B121L	120.0			0.080	2.50
ELC16B151L	150.0			0.103	2.20
ELC16B181L	180.0			0.115	2.10
ELC16B221L	220.0			0.130	1.90
ELC16B271L	270.0			0.170	1.60
ELC16B331L	330.0			0.200	1.50
ELC16B391L	390.0			0.250	1.30
ELC16B471L	470.0			0.280	1.20
ELC16B561L	560.0			0.380	1.10
ELC16B681L	680.0			0.430	1.00
ELC16B821L	820.0			0.580	0.88
ELC16B102L	1000.0			0.660	0.85
ELC16B122L	1200.0			0.740	0.82
ELC16B152L	1500.0			0.870	0.74
ELC16B182L	1800.0			1.220	0.60
ELC16B222L	2200.0			1.380	0.57
ELC16B272L	2700.0			1.570	0.54
ELC16B332L	3300.0			2.000	0.47
ELC16B392L	3900.0			2.400	0.42
ELC16B472L	4700.0			3.300	0.36
ELC16B562L	5600.0			3.700	0.34
ELC16B682L	6800.0			4.200	0.32
ELC16B822L	8200.0			5.600	0.28
ELC16B103L	10000.0			6.400	0.26

✻ Allowable DC Current: Smaller current value either when the inductance is –10 % or when the case temperature has risen 45 °C.


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Examples Type 18B


[Dimensions in mm]
(not to scale)

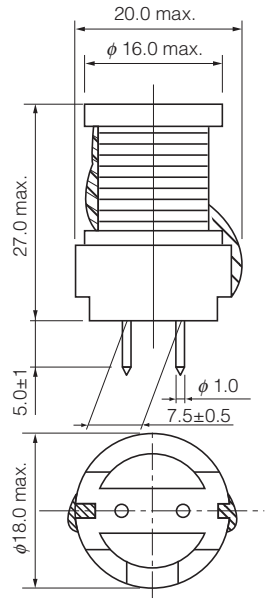

Recommended PWB
piercing plan



Connection Schematic




Part No.	Inductance (μH)	Tolerance (%)	Test Freq. (kHz)	R_{DC}.(Ω) [at 20 °C] (Tol.±20 %)	I_{DC}.* [at 20 °C] (A)max.
ELC18B3R3L	3.3	±20	10	0.010	8.50
ELC18B3R9L	3.9			0.011	8.00
ELC18B4R7L	4.7			0.012	7.80
ELC18B5R6L	5.6			0.013	7.40
ELC18B6R8L	6.8			0.015	6.80
ELC18B8R2L	8.2			0.016	6.60
ELC18B100L	10.0			0.017	6.50
ELC18B120L	12.0			0.018	6.00
ELC18B150L	15.0			0.021	5.90
ELC18B180L	18.0			0.022	5.60
ELC18B220L	22.0	±10		0.025	5.40
ELC18B270L	27.0			0.028	4.80
ELC18B330L	33.0			0.030	4.60
ELC18B390L	39.0			0.033	4.40
ELC18B470L	47.0			0.037	4.30
ELC18B560L	56.0			0.040	4.20
ELC18B680L	68.0			0.046	4.00
ELC18B820L	82.0			0.051	3.70
ELC18B101L	100.0			0.057	3.20
ELC18B121L	120.0			0.065	3.00
ELC18B151L	150.0			0.072	2.70
ELC18B181L	180.0			0.082	2.60
ELC18B221L	220.0			0.090	2.40
ELC18B271L	270.0			0.110	2.20
ELC18B331L	330.0			0.130	1.90
ELC18B391L	390.0			0.150	1.80
ELC18B471L	470.0			0.210	1.60
ELC18B561L	560.0			0.230	1.50
ELC18B681L	680.0			0.260	1.40
ELC18B821L	820.0			0.340	1.30
ELC18B102L	1000.0			0.390	1.10
ELC18B122L	1200.0			0.440	1.00
ELC18B152L	1500.0			0.580	0.85
ELC18B182L	1800.0			0.650	0.84
ELC18B222L	2200.0			0.880	0.75
ELC18B272L	2700.0			1.200	0.68
ELC18B332L	3300.0			1.400	0.60
ELC18B392L	3900.0			1.500	0.57
ELC18B472L	4700.0			1.700	0.55
ELC18B562L	5600.0			2.200	0.46
ELC18B682L	6800.0			2.800	0.45
ELC18B822L	8200.0			3.100	0.41
ELC18B103L	10000.0			3.900	0.36

* Allowable DC Current: Smaller current value either when the inductance is –10 % or when the case temperature has risen 45 °C.


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Examples Type 10E-L


[Dimensions in mm]
(not to scale)



Recommended PWB piercing plan



Connection Schematic




Part No.	Inductance (μH)	Tolerance (%)	Test Freq. (kHz)	R_{DC}.(Ω) [at 20 °C] (Tol.±20 %)	I_{DC}.* [at 20 °C] (A)max.
ELC10E3R9L	3.9	±20	10	0.024	2.90
ELC10E4R7L	4.7			0.027	2.80
ELC10E5R6L	5.6			0.030	2.70
ELC10E6R8L	6.8			0.032	2.60
ELC10E8R2L	8.2			0.035	2.50
ELC10E100L	10.0			0.038	2.40
ELC10E120L	12.0			0.040	2.30
ELC10E150L	15.0			0.046	2.20
ELC10E180L	18.0			0.049	2.10
ELC10E220L	22.0	±15		0.056	2.00
ELC10E270L	27.0			0.062	1.90
ELC10E330L	33.0			0.068	1.80
ELC10E390L	39.0			0.074	1.70
ELC10E470L	47.0			0.098	1.50
ELC10E560L	56.0			0.120	1.30
ELC10E680L	68.0	±10		0.150	1.20
ELC10E820L	82.0			0.190	1.00
ELC10E101L	100.0			0.210	0.96
ELC10E121L	120.0			0.240	0.92
ELC10E151L	150.0			0.260	0.83
ELC10E181L	180.0			0.290	0.74
ELC10E221L	220.0			0.410	0.64
ELC10E271L	270.0			0.590	0.54
ELC10E331L	330.0			0.660	0.52
ELC10E391L	390.0			0.720	0.50
ELC10E471L	470.0			0.800	0.45
ELC10E561L	560.0			1.100	0.41
ELC10E681L	680.0			1.200	0.37
ELC10E821L	820.0			1.600	0.33
ELC10E102L	1000.0			1.800	0.31
ELC10E122L	1200.0			2.000	0.29
ELC10E152L	1500.0			2.800	0.26
ELC10E182L	1800.0			3.200	0.23
ELC10E222L	2200.0			3.600	0.20
ELC10E272L	2700.0			5.200	0.18
ELC10E332L	3300.0			5.900	0.17
ELC10E392L	3900.0			6.500	0.16
ELC10E472L	4700.0			9.600	0.14
ELC10E562L	5600.0			10.800	0.12
ELC10E682L	6800.0			11.900	0.11
ELC10E822L	8200.0			13.200	0.10


✻ Allowable DC Current: Smaller current value either when the inductance is –10 % or when the case temperature has risen 45 °C.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.


Examples Type 12E-L

[Dimensions in mm]
(not to scale)

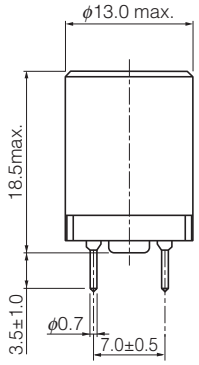




Recommended PWB
piercing plan



Connection Schematic




Part No.	Inductance (μH)	Tolerance (%)	Test Freq. (kHz)	R_{DC}.(Ω) [at 20 °C] (Tol.±20 %)	I_{DC}.* [at 20 °C] (A)max.
ELC12E4R7L	4.7	±25	10	0.014	4.40
ELC12E5R6L	5.6			0.016	4.10
ELC12E6R8L	6.8			0.018	3.90
ELC12E8R2L	8.2			0.020	3.70
ELC12E100L	10.0	±20		0.023	3.50
ELC12E120L	12.0			0.024	3.30
ELC12E150L	15.0			0.028	3.20
ELC12E180L	18.0			0.030	3.10
ELC12E220L	22.0	±10		0.033	2.80
ELC12E270L	27.0			0.037	2.50
ELC12E330L	33.0			0.041	2.40
ELC12E390L	39.0			0.044	2.20
ELC12E470L	47.0			0.048	2.00
ELC12E560L	56.0			0.053	1.80
ELC12E680L	68.0			0.073	1.70
ELC12E820L	82.0			0.098	1.40
ELC12E101L	100.0			0.140	1.30
ELC12E121L	120.0			0.160	1.20
ELC12E151L	150.0			0.180	1.10
ELC12E181L	180.0			0.200	1.00
ELC12E221L	220.0			0.220	0.91
ELC12E271L	270.0			0.320	0.83
ELC12E331L	330.0			0.360	0.79
ELC12E391L	390.0			0.400	0.70
ELC12E471L	470.0			0.440	0.64
ELC12E561L	560.0			0.490	0.57
ELC12E681L	680.0			0.610	0.52
ELC12E821L	820.0			0.760	0.47
ELC12E102L	1000.0			1.100	0.43
ELC12E122L	1200.0			1.200	0.40
ELC12E152L	1500.0			1.400	0.36
ELC12E182L	1800.0			1.900	0.32
ELC12E222L	2200.0			2.500	0.30
ELC12E272L	2700.0			3.500	0.26
ELC12E332L	3300.0			3.900	0.24
ELC12E392L	3900.0			4.300	0.22
ELC12E472L	4700.0			6.000	0.20
ELC12E562L	5600.0			6.600	0.17
ELC12E682L	6800.0			9.900	0.15
ELC12E822L	8200.0			10.900	0.14
ELC12E103L	10000.0			12.200	0.13


✻ Allowable DC Current: Smaller current value either when the inductance is –10 % or when the case temperature has risen 45 °C.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.


Examples Type 15E-L

[Dimensions in mm]
(not to scale)





Recommended PWB
piercing plan




Part No.	Inductance (μH)	Tolerance (%)	Test Freq. (kHz)	R_{DC}.(Ω) [at 20 °C] (Tol.±20 %)	I_{DC}.* [at 20 °C] (A)max.
ELC15E5R6L	5.6	±20	10	0.012	6.80
ELC15E6R8L	6.8			0.013	6.30
ELC15E8R2L	8.2			0.016	5.80
ELC15E100L	10			0.018	5.40
ELC15E120L	12			0.019	5.10
ELC15E150L	15			0.022	4.70
ELC15E180L	18			0.024	4.50
ELC15E220L	22	±10		0.027	4.30
ELC15E270L	27			0.029	4.10
ELC15E330L	33			0.032	4.00
ELC15E390L	39			0.033	3.80
ELC15E470L	47			0.037	3.70
ELC15E560L	56			0.039	3.60
ELC15E680L	68			0.045	3.50
ELC15E820L	82			0.048	3.20
ELC15E101L	100			0.053	3.00
ELC15E121L	120			0.059	2.60
ELC15E151L	150			0.077	2.40
ELC15E181L	180			0.100	2.30
ELC15E221L	220			0.140	2.00
ELC15E271L	270			0.150	1.70
ELC15E331L	330			0.170	1.60
ELC15E391L	390			0.190	1.50
ELC15E471L	470			0.210	1.30
ELC15E561L	560			0.280	1.20
ELC15E681L	680			0.310	1.10
ELC15E821L	820			0.440	1.00
ELC15E102L	1000			0.490	0.95
ELC15E122L	1200			0.540	0.85
ELC15E152L	1500			0.710	0.80
ELC15E182L	1800			0.870	0.75
ELC15E222L	2200			1.100	0.63
ELC15E272L	2700			1.400	0.60
ELC15E332L	3300			1.600	0.53
ELC15E392L	3900			1.700	0.47
ELC15E472L	4700			2.400	0.43
ELC15E562L	5600			2.600	0.39
ELC15E682L	6800			2.900	0.36
ELC15E822L	8200			3.500	0.34
ELC15E103L	10000			4.600	0.30


✻ Allowable DC Current: Smaller current value either when the inductance is –10 % or when the case temperature has risen 45 °C.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.


Examples Type 18E-L

[Dimensions in mm]
(not to scale)





Recommended PWB
piercing plan




(Top View)

Part No.	Inductance (μH)	Tolerance (%)	Test Freq. (kHz)	R_{DC}.(Ω) [at 20 °C] (Tol.±20 %)	I_{DC}.* [at 20 °C] (A)max.
ELC18E5R6L	5.6	±20	10	0.011	6.70
ELC18E6R8L	6.8			0.013	6.50
ELC18E8R2L	8.2			0.013	6.20
ELC18E100L	10			0.014	5.90
ELC18E120L	12			0.016	5.60
ELC18E150L	15			0.017	5.40
ELC18E180L	18			0.019	5.20
ELC18E220L	22	±10		0.022	5.00
ELC18E270L	27			0.023	4.80
ELC18E330L	33			0.026	4.60
ELC18E390L	39			0.028	4.50
ELC18E470L	47			0.030	4.10
ELC18E560L	56			0.031	3.80
ELC18E680L	68			0.036	3.60
ELC18E820L	82			0.040	3.50
ELC18E101L	100			0.044	3.00
ELC18E121L	120			0.047	2.80
ELC18E151L	150			0.061	2.60
ELC18E181L	180			0.067	2.50
ELC18E221L	220			0.076	2.10
ELC18E271L	270			0.083	2.00
ELC18E331L	330			0.110	1.90
ELC18E391L	390			0.120	1.80
ELC18E471L	470			0.150	1.50
ELC18E561L	560			0.170	1.40
ELC18E681L	680			0.190	1.20
ELC18E821L	820			0.210	1.10
ELC18E102L	1000			0.280	1.00
ELC18E122L	1200			0.360	0.95
ELC18E152L	1500			0.510	0.90
ELC18E182L	1800			0.570	0.80
ELC18E222L	2200			0.630	0.73
ELC18E272L	2700			0.890	0.65
ELC18E332L	3300			1.000	0.60
ELC18E392L	3900			1.100	0.50
ELC18E472L	4700			1.400	0.48
ELC18E562L	5600			1.600	0.46
ELC18E682L	6800			2.200	0.39
ELC18E822L	8200			2.400	0.35
ELC18E103L	10000			2.700	0.33

* Allowable DC Current: Smaller current value either when the inductance is –10 % or when the case temperature has risen 45 °C.


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Tape Dimensions in mm for Type 09D (not to scale)

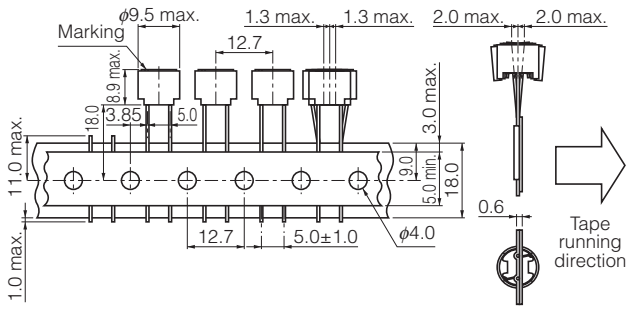

500 pcs./reel

Tape Dimensions in mm for Type 11D (not to scale)

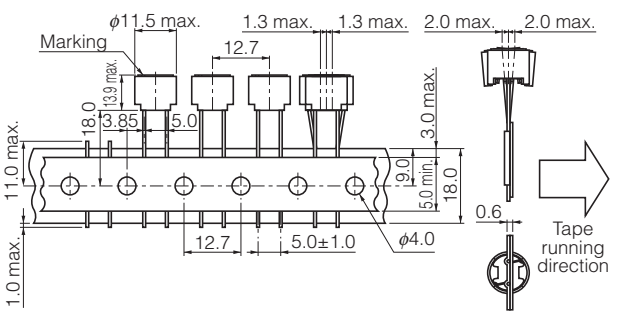

500 pcs./reel

⚠ Safety Precautions

- When using our products, no matter what sort of equipment they might be used for, be sure to make a written agreement on the specifications with us in advance. The design and specifications in this catalog are subject to change without prior notice.
- Do not use the products beyond the specifications described in this catalog.
- This catalog explains the quality and performance of the products as individual components. Before use, check and evaluate their operations when installed in your products.
- Install the following systems for a failsafe design to ensure safety if these products are to be used in equipment where a defect in these products may cause the loss of human life or other significant damage, such as damage to vehicles (automobile, train, vessel), traffic lights, medical equipment, aerospace equipment, electric heating appliances, combustion/gas equipment, rotating equipment, and disaster/crime prevention equipment.

✻ Systems equipped with a protection circuit and a protection device
✻ Systems equipped with a redundant circuit or other system to prevent an unsafe status in the event of a single fault

⚠ Precautions for use

1. Rated current

The rated current is defined as the smaller value of either the current value when the inductance drops 10 % down from its initial point, or when the average temperature of coil interior rises 45 °C up on power source.
Do not operate these coils beyond the specified rated current.

2. Mounting

① Cores may be damaged when excessive force or shock is applied.
Do not use products which may have been dropped.
② Be careful not to make contact with other parts and consider possible interaction between coils due to magnetic interference.
③ Be careful of being too close to heat-radiating parts (high temperature).
④ Do not bend the pin-terminals during assembly.
The pin-terminals must connect correctly.
Do not apply them a shock to avoid causing an open or short circuit condition.
⑤ The float on PWB must not be after mounting.

3. Soldering

① Use flux which will not effect copper wire. (Be sure to use proper amounts of chloride, pH and other solvents)
② When using a soldering iron, wait at least 3 minutes before attempting to re-solder.

4. Storage

① Avoid high temperatures, high moisture, gases and magnetic fields.
② For long term storage of more than 1 year, use the prod ucts only after inspecting their outer structure.
(Look for possible rusting of the core and oxidation of the lead wire, which would affect its solderability.)

<Package markings>
Package markings include the product number, quantity, and country of origin.
In principle, the country of origin should be indicated in English.

CAUTION AND WARNING

1. The electronic components contained in this catalog are designed and produced for use in home electric appliances, office equipment, information equipment, communications equipment, and other general purpose electronic devices.
   Before use of any of these components for equipment that requires a high degree of safety, such as medical instruments, aerospace equipment, disaster-prevention equipment, security equipment, vehicles (automobile, train, vessel),
   please be sure to contact our sales representative.
2. When applying one of these components for equipment requiring a high degree of safety, no matter what sort of application it might be, be sure to install a protective circuit or redundancy arrangement to enhance the safety of your equipment. In addition, please carry out the safety test on your own responsibility.
3. When using our products, no matter what sort of equipment they might be used for, be sure to make a written agreement on the specifications with us in advance.
4. Technical information contained in this catalog is intended to convey examples of typical performances and/or applications and is not intended to make any warranty with respect to the intellectual property rights or any other related rights of our company or any third parties nor grant any license under such rights.
5. In order to export products in this catalog, the exporter may be subject to the export license requirement under the Foreign Exchange and Foreign Trade Law of Japan.
6. No ozone-depleting substances (ODSs) under the Montreal Protocol are used in the manufacturing processes of Automotive & Industrial Systems Company, Panasonic Corporation.

● Please contact

● Factory

Device Solutions Business Division
Automotive & Industrial Systems Company
Panasonic Corporation
1006 Kadoma, Kadoma City, Osaka 571-8506,
JAPAN

The information in this catalog is valid as of October. 2018.