

PE-65535NL

4

3


2

1




NOTICE: THE INFORMATION AND
DESIGN CONTAINED HEREIN IS THE
PROPERTY OF PULSE WHO
RESERVES ALL RIGHTS THERETO.

TEST NOTES:

1. TURNS RATIO 1 V 10 KHz (100%) .
 $\frac{(4-5)}{(1-3)} = \frac{(5-6)}{(1-3)} = 1.0 \pm 2\%$
2. INDUCTANCE 20 KHz 0.02 V (100%)
(1-3) = 20 mH MIN
3. LEAKAGE INDUCTANCE 100 KHz 0.02 V (SAMPLE)
(4-6) WITH (1-3) SHORT = 5.0 uH MAX
4. COUPLING CAPACITY 100 KHz 0.02 V (SAMPLE)
(4-6) TO (1-3) = 130 pF MAX
5. DC RESISTANCE (SAMPLE)
(1-3) = 2.65 OHM MAX
(4-6) = 5.00 OHM MAX
6. HIPOT (100%)
(1-3) TO (4-6) = 1500 VRMS 1 MINUTE
(1650 VRMS 6 SEC)



SCHEMATIC

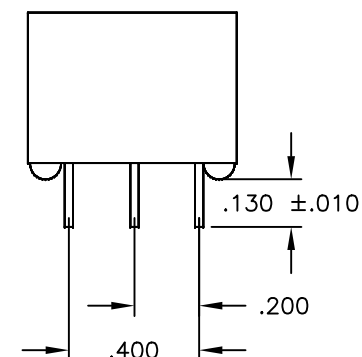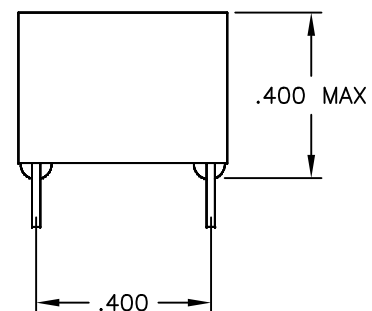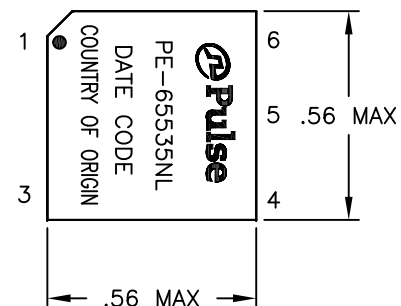

FINAL OUTLINE

FIG.3

UNLESS OTHERWISE SPECIFIED, ALL
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

DECIMALS ANGLES
.XX ±.01 ± 1°
.XXX ±.005
DO NOT SCALE DRAWING

SIZE CAGE CODE DWG. NO.
B01961
SCALE NONE CADD FILE

PE-65535NL-4

SHEET 4 OF 4

REV 12