


SIGN	DATE	DESCRIPTION	APPROVER

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!



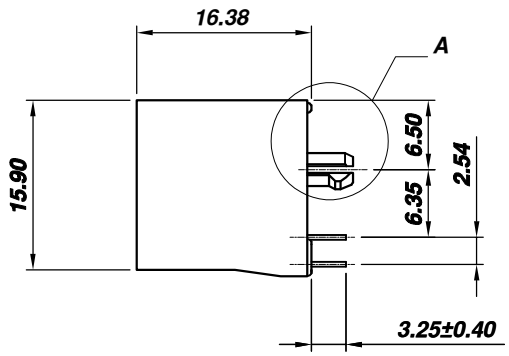




Material:


- Housing: PBT Glass Filled (UL 94V-0)
- Color: Black
- Spring Wire: 0.45mm Diameter Phosphor Bronze
  Gold Plating over Nickel
- Temp. Range: -40°C/+85°C
- Durability: 750 Mating cycles Min.
- Soldering Temp: 235 Deg C for 5 seconds

Electrical:

- Current rating: 1.5A Max.
- Voltage rating: 150V AC
- Insulation Resistance: 500 MΩMin.
- Contact Resistance: 30mΩMax.
- Dielectric Voltage: 1,000 Vrms for 60 sec. min.

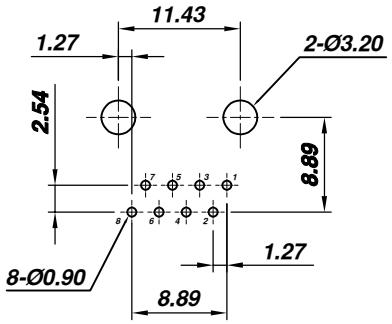

PCB LAYOUT
(Top View)

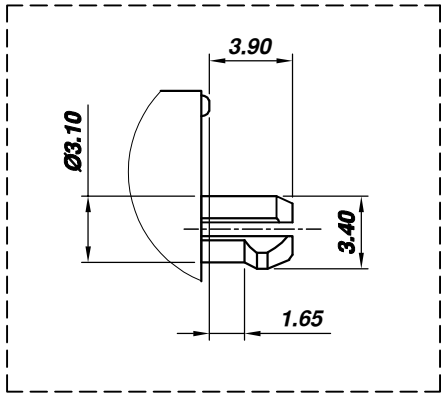

A(2:1)

- Part Number

PJ012-8P8CX

Gold plating	1=6u" 2= 15u" 3=30u" 4=50u"

RoHS Compliant

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

ON-SHORE TECHNOLOGY, INC.

TITLE	PJ012, 8 pos, 8 cont, top entry, thru hole					
PART NO.	PJ012-8P8CX			DWG NO.	PJ012-8P8CX.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
Billy 2013.08.26	Liu 2013.08.26	Jason 2013.08.26	Steven 2013.08.26	SHEET: 01/01	UNIT: mm SCALE: NONE REV.: A	X.XX ±0.25 X.XXX ±0.13 X.XXXX ±0.05