


SIGN	DATE	DESCRIPTION	APPROVER
1	11/01'05	Electrical standard changed.	Marvin
2	04/20'06	2p to 6p with wedge is changed.	Marvin
3	06/06'06	2p to 6p with wedge is removed.	Marvin
4	8/13'06	Added VDE standard	黎仁松
5	12/15'08	Flange screw changed from "-"solt type to "+/-"solt type	Kind
6	12/15'08	Operating Temp. changed from -30°C~+105°C to -40°C~+115°C	Kind
7	2010.07.09	The solid and Stranded wire is changed from16-26 to16-28	Chen Bo
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

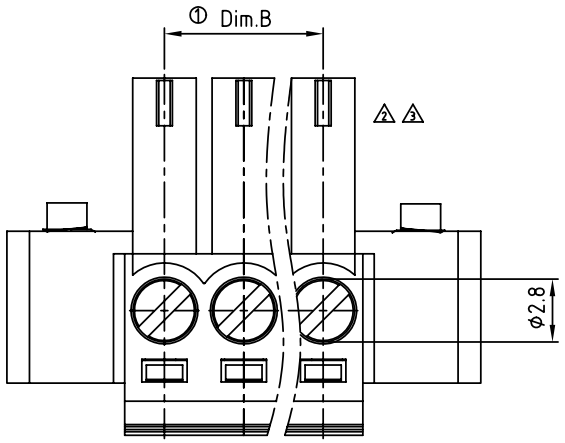

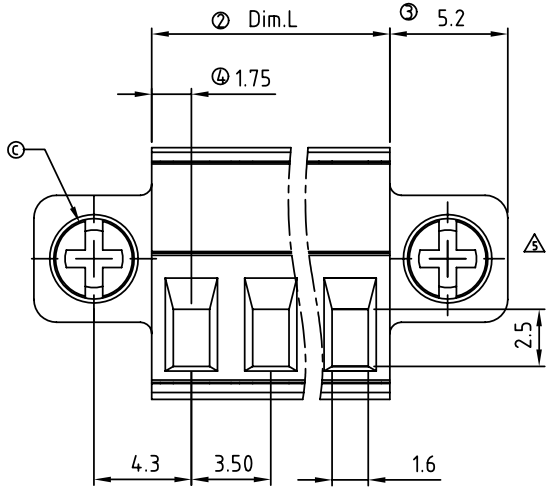

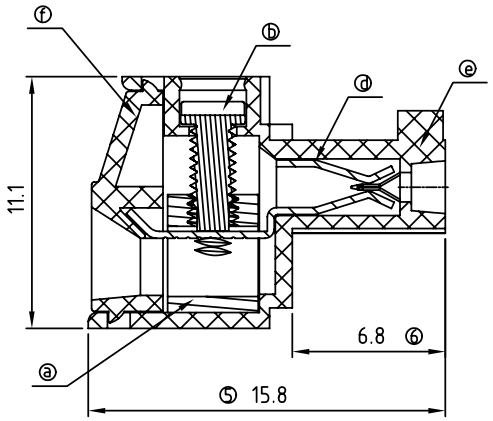

Material

- Item a Clamp: Brass(CuZn) Ni plated
- Item b Terminal screw: Steel Zinc plating "-" slot type
- 5 Item c With flange screw : steel M2.5 Zinc plating "+/-" slot type
- Item d Female contact: PhBz ,Tin plated
- Item e Terminal (housing): Thermoplastic (UL94V-0)
- Item f Terminal (cover): Thermoplastic (UL94V-0)

4 1 Electrical cULus/VDE

- Voltage rating: 300VAC/300VAC
- Current rating: 10A/10.5A
- Wire range: 1.5mm²
- Solid wire(AWG): 16-28/16-28
- 7 Stranded wire(AWG): 16-28/16-28
- Torque: 3.0Lb-In/0.2Nm
- Screw: M2
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV/2.5KV
- 6 Operating temperature: -40°C to +115°C
- Safety Approval: cULus VDE

TJ xx 11 x 2 xxxx G

02	2 CONTACTS	0	Black (RAL9005)	0000	Standard @ Logo
03	3 CONTACTS	2	Red (RAL3001/D)	000A	Standard ANY Logo
...	...	3	Orange(RAL2011/P)	0091	Standard ANY Logo
24	24 CONTACTS	4	Yellow(RAL1018/A)	Any special item by customer request, please contact sales department.	
		5	Green(RAL6018/T)		
		6	Blue (RAL5015/A)		
		8	Grey(RAL7035/D)		

Pb < 40,000ppm (RoHS)

Dim.L = N x 3.5
Dim.B = (N-1) x 3.5
N= number of poles

Dim. \ poles	2P-6P	7P-12P	13P-18P	19P-24P
Dim.L	±0.15	±0.20	±0.25	±0.30
Dim.B	±0.15	±0.20	±0.25	±0.30

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	TJ-3.5mm Series With flange					
PART NO.	TJxx11x2xxxxG			DWG NO.	8TJ0504	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
			Chen Bo 2010.07.09	UNIT: mm		X. ±0.50
				SCALE: NONE		X.X ±0.30
				SHEET: 01/01	REV.: I	X.XX ±0.10 X° ±1°