


No. of Contacts	DIMENSIONS	
	A	B
24	10.00	12.40
28	12.00	14.40
32	14.00	16.40
36	16.00	18.40
40	18.00	20.40
44	20.00	22.40
48	22.00	24.40
52	24.00	26.40
56	26.00	28.40
60	28.00	30.40
64	30.00	32.40
68	32.00	34.40
72	34.00	36.40
76	36.00	38.40
80	38.00	40.40
84	40.00	42.40
88	42.00	44.40
92	44.00	46.40
96	46.00	48.40
100	48.00	50.40
104	50.00	52.40
108	52.00	54.40
112	54.00	56.40
116	56.00	58.40
120	58.00	60.40

SPECIFICATIONS	
Current Rating:	1 Amp
Insulator Resistance:	5000 Mega Ohms min.
Contact Resistance:	20 milli Ohm Max.
Dielectric Withstanding:	500 VAC
Operating Temperature:	-40 Degrees C. to +105 Degrees C.
Max. Processing Temp:	230 Degrees C. for 30-60 seconds (260 Degree C. for 10 seconds)
Contact Material:	Phosphor Bronze.
Insulator Material:	Polyester, UL 94V-0
	© Standard: Nylon-6T
Contact Finish:	Selective Plating, Gold/Tin

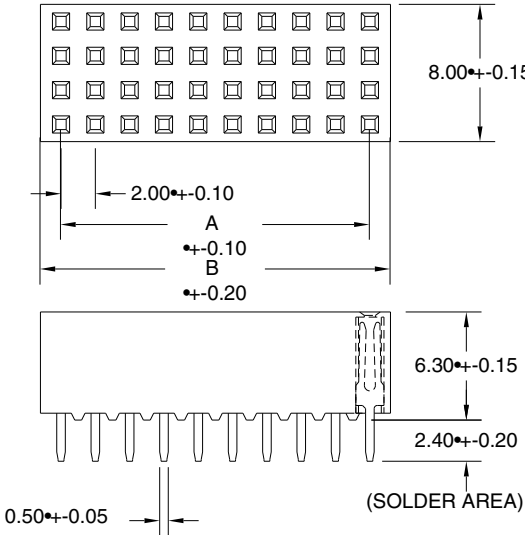

SULLINS
801 E. MISSION RD.
SAN MARCOS, CA 92069

GENERAL TOLERANCE	
XX. $\pm$	XXX. $\pm$
X. $\pm$ 0.20	.XXX $\pm$
.X $\pm$ 0.10	X.B $\pm$
.XX $\pm$ 0.05	.XB $\pm$

SCALE	3:1
UNIT	mm
SIZE	A4

DRAWN	CHECK	APPROVE
DATE	DATE	DATE

DWG. NO.	T0025
PARTS NO.	PPRNXX4EFCN

TITLE	REV.
	SHEET