PQ1KAxx3MZPH Series

Compact Surface Mount Type
Low Power-Loss Voltage Regulators

■ Features

1.Compact surface mount package (3.4×2.2×1.2mm)
2.Output current : MAX.300mA
3.Built-in ON/OFF control function
4.Built-in overcurrent, overheat protection functions
5.Use of ceramic capacitor is possible as output smooth capacitor
6.RoHS directive compliant

■ Applications

1.CD-ROM drives
2.DVD-ROM drives

■ Model Line-up

Output Voltage (TYP.)	Model No.
1.5V	PQ1KA153MZPH
1.8V	PQ1KA183MZPH
2.5V	PQ1KA253MZPH
3.0V	PQ1KA303MZPH
3.3V	PQ1KA333MZPH
5.0V	PQ1KA503MZPH
9.0V	PQ1KA903MZPH

■ Absolute Maximum Ratings


(Ta=25°C)

Parameter	Symbol	Rating	Unit
*1 Input voltage	V_{IN}	15	V
*1 Output control voltage	V_C	15	V
Output current	I_O	300	mA
*2 Power dissipation	P_D	400	mW
*3 Junction temperature	Tj	150	°C
Operating temperature	T_{opr}	-40 to +85	°C
Storage temperature	T_{stg}	-55 to +150	°C
Soldering temperature	T_{sol}	270(10s)	°C

*1 All are open except GND and applicable terminals.
*2 At surface-mounted condition
*3 Overheat protection may operate at Tj:125°C to 150°C

■ Outline Dimensions

(Unit : mm)

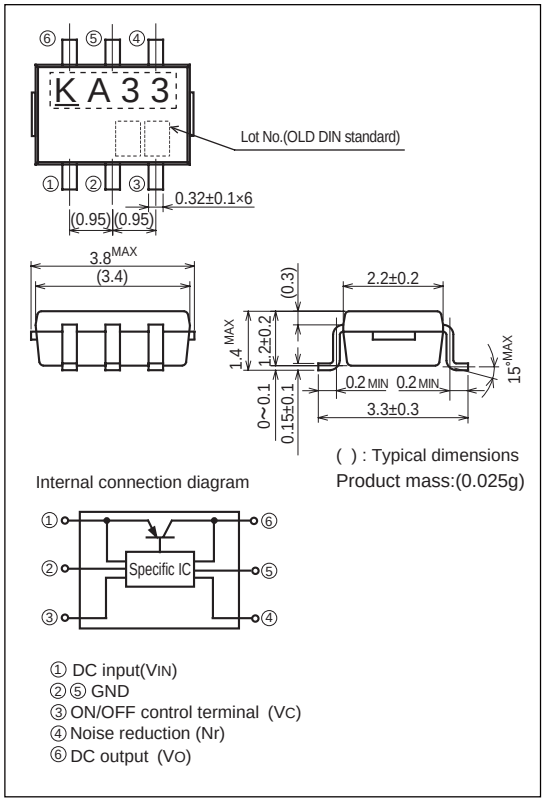

Lead finish:Lead-free solder plating
(Composition: Sn2Cu)

Notice The content of data sheet is subject to change without prior notice.
In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.

■ Electrical Characteristics

(Unless otherwise specified condition shall be V_{IN}=V_O(TYP.)+1.0V,I_O=30mA,V_C=1.8V,Ta=25°C)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Output voltage	V_O	—	Refer to list.1			V
Input voltage	V_{IN}	—	2.5	—	15	V
Load regulation	RegL	V_O<3V,I_O=5 to 300mA	—	10	60	mV
		V_O≥3V,I_O=5 to 300mA	—	0.2	2	%
Line regulation	RegI	V_O<3V,V_{IN}=V_O(TYP)+1V to V_O(TYP)+6V	—	5	15	mV
		V_O≥3V,V_{IN}=V_O(TYP)+1V to V_O(TYP)+6V	—	0.05	0.5	%
Temperature coefficient of output voltage	TcVo	I_O=10mA, Tj=0 to 100°C	—	±0.5	—	%
※4 Ripple rejection	RR	Refer to Fig.2	—	55	—	dB
※4 Output noise voltage	$V_{no(rms)}$	10Hz<f<100kHz,C_n=0.1μF,I_O=30mA	—	50	—	μV
Dropout voltage	V_{I-O}	I_O=300mA,※5,※6	—	0.4	0.7	V
※7 On-state voltage for control	$V_{C(ON)}$	—	1.8	—	—	V
On-state current for control	$I_{C(ON)}$	V_C=1.8V	—	5	30	μA
Off-voltage for control	$V_{C(OFF)}$	—	—	—	0.4	V
Quiescent current	I_q	I_O=0mA	—	550	800	μA
Output off-state consumption current	I_{qs}	V_C=0.2V	—	—	1	μA

※4 Typical value of 3.3V output model.
※5 Input voltage when output voltage falls 0.1V from that at V_{IN}=V_O(TYP)+1.0V.
※6 Excluding **PQ1KA153MZPH , PQ1KA183MZPH**
※7 In case that the control terminal (③ pin) is non-connection,output voltage should be OFF state.

List.1 Output voltage Line-up

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
PQ1KA153MZPH	V_O	V_{IN}=V_O(TYP.)+1.0V, I_O=30mA, V_C=1.8V,Ta=25°C	1.440	1.5	1.560	V
PQ1KA183MZPH			1.740	1.8	1.860	
PQ1KA253MZPH			2.440	2.5	2.560	
PQ1KA303MZPH			2.940	3.0	3.060	
PQ1KA333MZPH			3.234	3.3	3.366	
PQ1KA503MZPH			4.900	5.0	5.100	
PQ1KA903MZPH			8.820	9.0	9.180	

Fig.1 Standard measuring circuit of Regulator portion



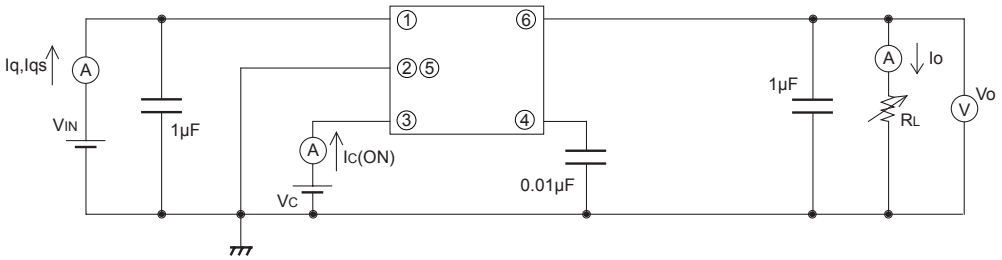


Fig.2 Standard measuring circuit of critical rate of ripple rejection

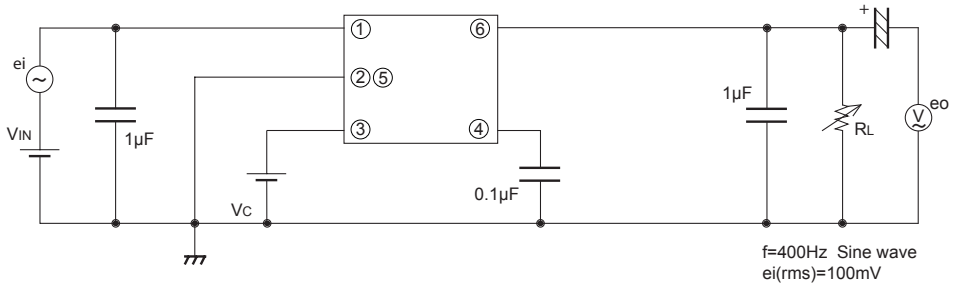

f=400Hz Sine wave
ei(rms)=100mV
V_{IN}=V_O(TYP.)+1.0V
V_C=1.8V
I_O=10mA
RR=20log {ei(rms)/Eo(rms)}

Fig.3 Power Dissipation vs. Ambient Temperature

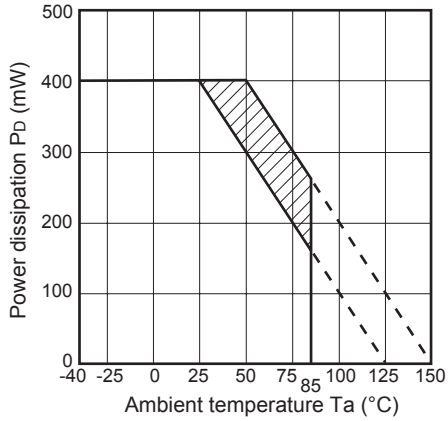

Note) Oblique line portion:Overheat protection may operate in this area.

Fig.4 Overcurrent Protection Characteristics

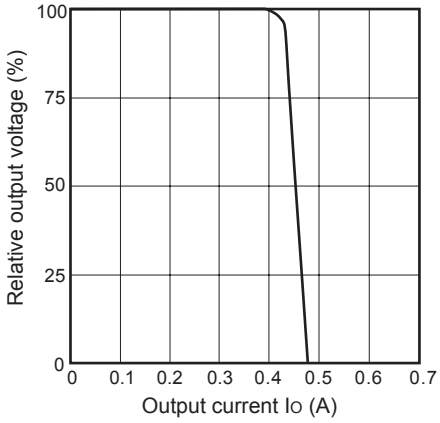


Fig.5 Output Voltage vs. Input Voltage (Typical Value) (**PQ1KA333MZPH**)

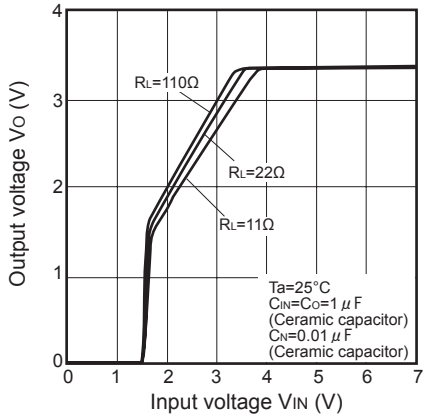


Fig.6 Circuit Operating Current vs. Input Voltage (Typical Value) (**PQ1KA333MZPH**)

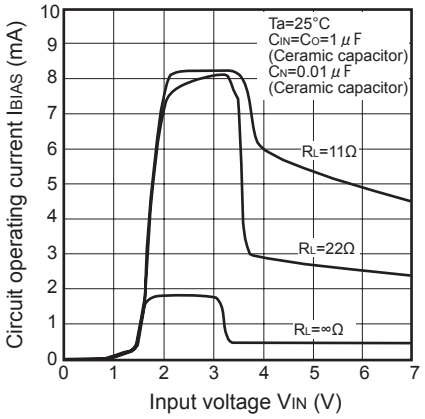


Fig.7 Quiescent Current vs. Junction Temperature (Typical Value)

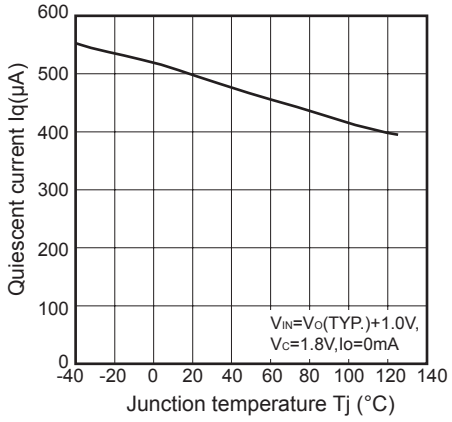


Fig.8 Dropout Voltage vs. Junction Temperature (Typical Value) (**PQ1KA333MZPH**)

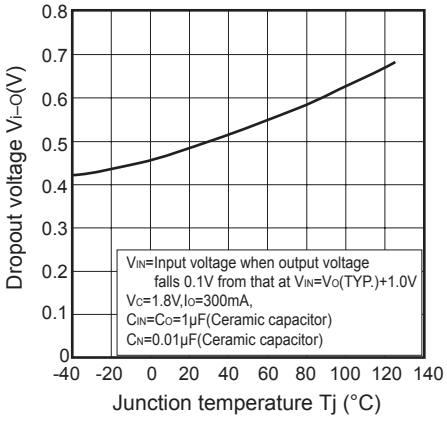


Fig.9 Output Voltage Deviation vs. Junction Temperature (Typical Value) (**PQ1KA333MZPH**)

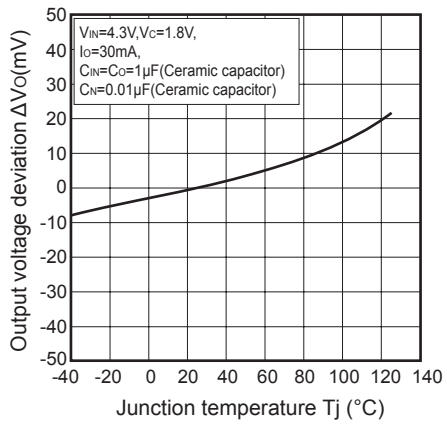


Fig.10 Dropout Voltage vs. Output Current (Typical Value)

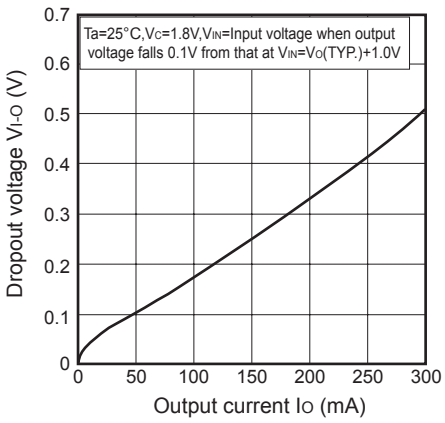


Fig.11 Ripple Rejection vs. Input Ripple Frequency (Typical Value) (**PQ1KA333MZPH**)


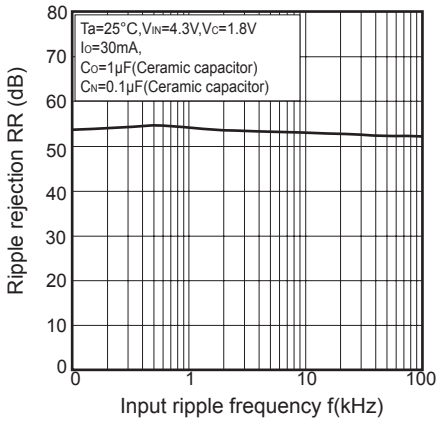


Fig.12 Output Peak Current vs. Junction Temperature (Typical Value)



■ Example of application

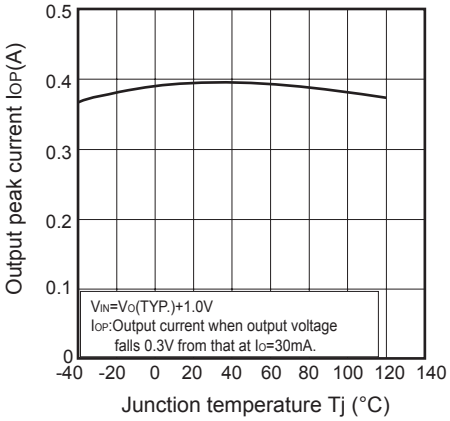